

\*All rights reserved.  
\*Copyright is owned by KIN LONG.  
\* Printed in January,2024.

KIN LONG

KIN LONG  
*For Better Living*

Furniture Hardware Typical Product Catalogue



Furniture Hardware Typical Product Catalogue



Guangdong Kinlong Hardware Products Co.,Ltd.

NO.3 Jianlang RD,Daping Industrial Zone,Tangxia Town,Dongguan City,China  
T: 0086-769-82166666 82136666  
F: 0086-769-82955240 82955241  
E: mail@kinlong.com  
H: www.kinlong.com

STOCK CODE: 002791

TO IMPROVE THE HUMAN  
BEING'S LIVING CONDITIONS AND  
MAKE KINLONG THE SYNONYM  
FOR HIGH-QUALITY.

More than **900,000** <sup>m<sup>2</sup></sup>  
production area.

More than **60** subsidiaries.

More than **1000** sales offices both  
in domestic and overseas .

More than **16,000** employees.

# ESTABLISHING BENCHMARK AND PURSUING EXCELLENCE

Kinlong was established in 2003 and is a company engaged in design and research, manufacturing and sales of construction and building products. We are committed to provide high-quality products and services. After years of development, Kinlong has become a reputable brand in the construction industry.

Kinlong industrial park has an area of more than 900,000 square meters and has an employment of more than 16000 staff. Kinlong owns more than 60 subsidiaries, and with over 1000 sales branches in the domestic and overseas markets. The company has more than 20,000 categories of products, which has been sold to more than 100 countries and areas. Kinlong, with it's sophisticated production management, provides customers with integrated solutions for different functional buildings.

Focusing on providing integrated construction and building accessories and diversified products, Kinlong continues to meet customer needs and market changes with the sales model of "R&D + manufacturing + service", and sets up its own marketing networks to directly provide customers with products and technical services. With years of precipitation and accumulation, Kinlong is at the forefront of the industry.

Over the years, Kinlong has been embracing the philosophy of "Unique value is created by professionalism, but no future shall be created by speculation". This has made Kinlong standing on the leading position in construction hardware market. Kinlong has provided products and services for many famous buildings around the world, and the landmark buildings of countless cities have become the pride and glory of Kinlong people.

To every designer, engineer and company committed in construction industry, Kinlong is always the most trustworthy and reliable partner.

## Social Responsibility



For more than ten years, Kinlong has not forgotten to give back to the society while developing itself. By the end of 2023, more than 90 kinlong social charity schools have been donated and built in remote and backward areas.



# INNOVATION AND ENTERPRISING INDUSTRY BENCHMARK

KINLONG KEEPS MAKING  
PROGRESS BY INNOVATION, BY  
WHICH WE HAVE OBTAINED  
RECOGNITION AND HIGH PRAISE  
FROM STATE  
DEPARTMENTS,GOVERNMENT  
UNITS AND SECTORS .



## ENTERPRISE REPRESENTATIVE HONOR

Second Prize in National Science and Technology Progress Award

First Prize in Huaxia Construction Science and Technology Award

Second Prize in Huaxia Construction Science and Technology Award

Special Prize in China Steel Structure Association Science and Technology Award

First Prize in China Steel Structure Association Science and Technology Award

Innovation Award in China Steel Structure Association Science and Technology Award

The most influential brand of Jinxuan Award in the construction door, window and curtain wall industry for four consecutive sessions;

2021 TOP500 Preferred Supplier of Comprehensive Strength of Chinese Real Estate Development Enterprises-Smart Community Service Category

National High-Tech Enterprise  
.....

## REPRESENTATIVE R&D INNOVATION HONOR

National Intellectual Property Demonstration Enterprise

Laboratory center approved by the National Accreditation Board

Guangdong Provincial Enterprise Technology

Center and Provincial Engineering Center  
.....

Kinlong adheres to the philosophy that Unique value can only be created by professionalism,speculation has no future. Our enterprise core value is to respect Respecting science; Striving for coexistence and all-win; Promoting constant innovation; Pursuing sincerity and trustworthiness. and we always insist making innovation, breaking through and making progress, increasing our capacity of research, by which we have obtained recognition and praise from government departments, units and all areas in the society and get many achievements. We pay great attention to the needs from our customers and the prospect of our industry, consistently pursuing perfect, good quality, excellent service and systematic solutions. Our quick and accurate ability of handing over are always leading the market.

KINLONG IS LEADING THE  
MARKET BY GOOD QUALITY,  
EXCELLENT SERVICE,  
SYSTEMATIC SOLUTIONS AND  
QUICK AND ACCURATE ABILITY  
TO DELIVER THE GOODS.



## To Form a Full-chain Comprehensive Advantage



## Quality Comes from Profession



Management system certificated by ISO9001,ISO14001 of BSI. Test Laboratory accredited by the China National Accreditation Service of Conformity Assessment(CNAS).

## International Supply Chain to Guarantee Better and Better Service




Kinlong owned more than 1000 sales outlets at home and abroad, with a sales team of more than 6,000 staff to provide customers with rapid response. With more than 30 offices,10 subsidiaries,15 warehoused overseas market, and more will be set up.

ENJOY LIFE





ENJOY LIFE  
QUIETLY,  
ALWAYS  
WITH ME

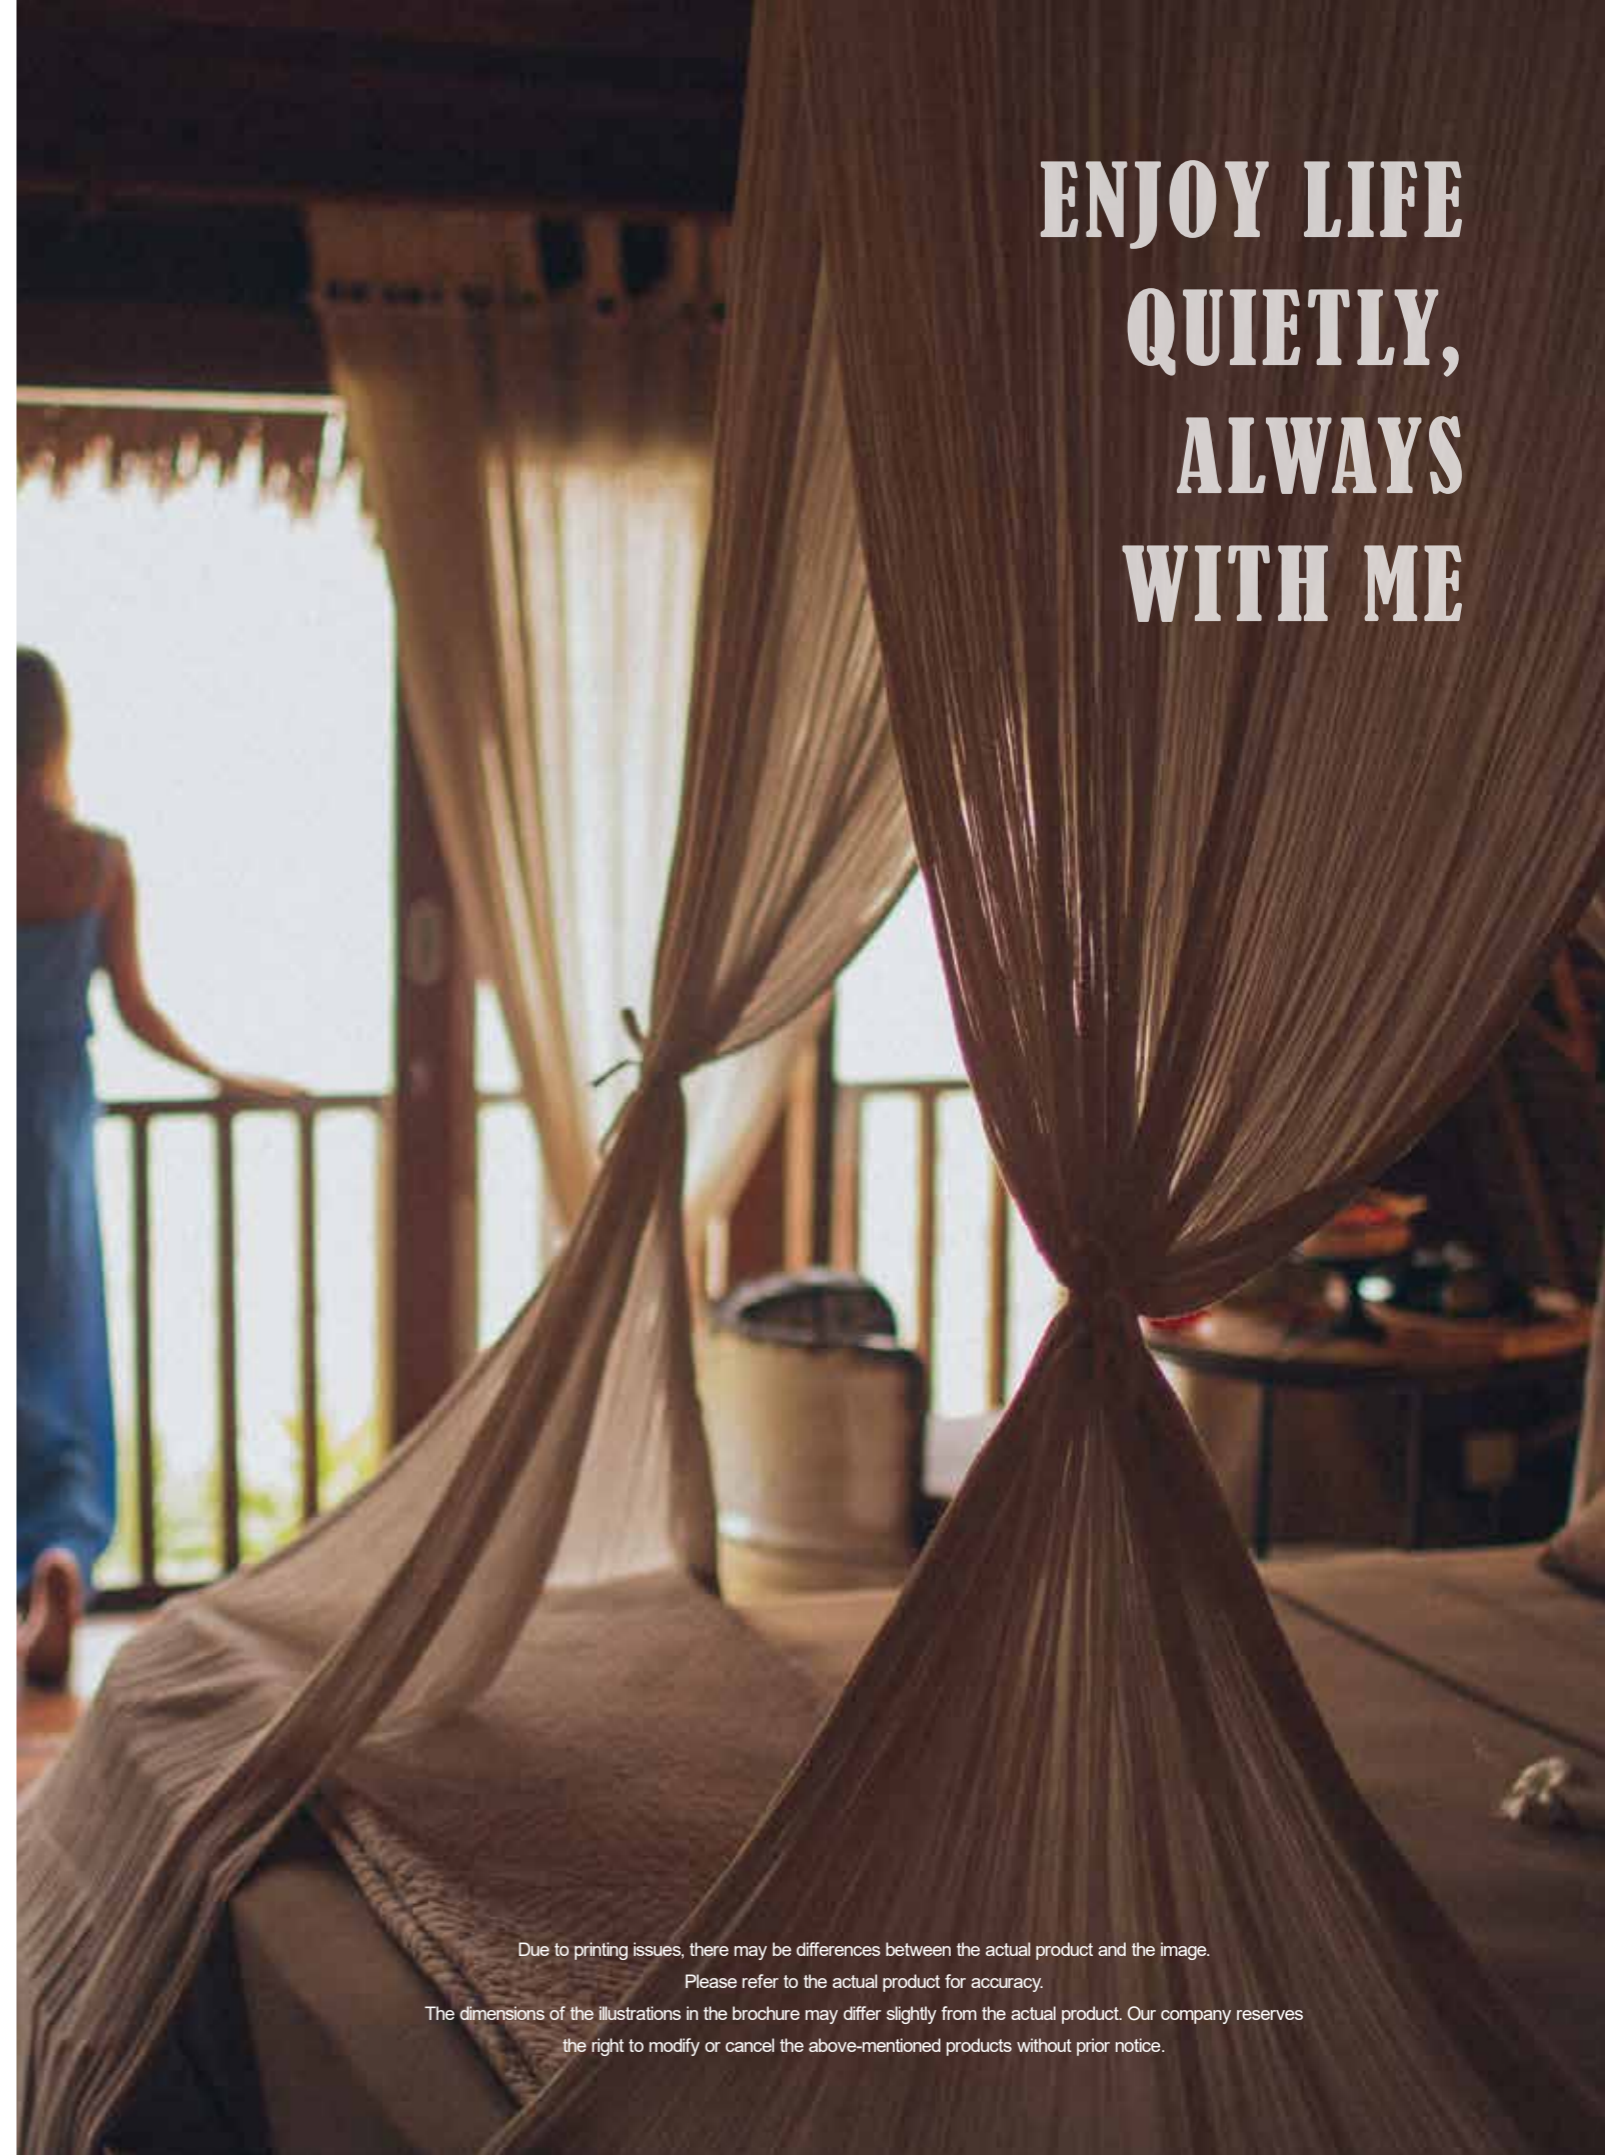

Due to printing issues, there may be differences between the actual product and the image.  
Please refer to the actual product for accuracy.  
The dimensions of the illustrations in the brochure may differ slightly from the actual product. Our company reserves  
the right to modify or cancel the above-mentioned products without prior notice.

# OUR HONOR

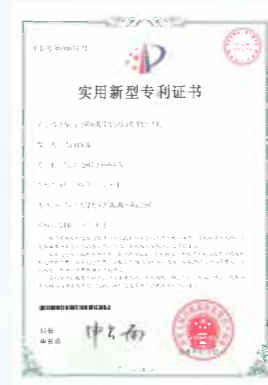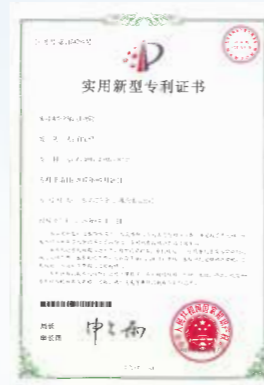



# CONTENTS

## CABINET DOOR HINGE

WJY22060	004
WJY12010	006
WJY22010	008
WJY12090	010
WJY12110	012
WJY22110	014
WJY12020	015
WJY22020	016

## DRAWER GUIDE RAIL

WJH21010	020
WJH22010	021
WJH23210	022
WJH31010	024
WJH31210	026
WJH33210	028

## CABINET DOOR HANDLE

WJL22100	032
WJL22000	034
WJL22100	036

## FURNITURE FITTINGS

Mechanical support	037
Glass clamp	040
Breathable mesh	040
Clothing pole seat	042
Wardrobe legs	046
Wine glass holder	047
Bookshelf pole	047
Clothes rail	047
Towel bar	047
Rebound device	048



## Cabinet Door Hinge



## Cabinet door hinge Enjoy Life Quietly

*Every detail shows the noble leadership  
temperament, which makes people feel  
shocked at the moment of meeting.*


- ◆ Classified by material: cold-rolled steel plate and 304 stainless steel plate
- ◆ Classified by the hinge cup, it is divided into 35 hinge cup and 40 hinge cup
- ◆ Classified by installation methods, it can be divided into fixed installation and detachable installation
- ◆ Each series has three styles, as follows:

A Full cover: also known as straight arm, generally refers to the door leaf covering all the side panels  
B Half cover: also known as middle bend, generally refers to the door leaf covering half of the side panel  
C Concealed: also known as a big bend, generally refers to the door leaf hidden inside the side panel

Product name:  
3D adjustable cabinet door hinge

Main material: Cold rolled steel plate  
Surface treatment: Nickel plating  
Opening angle: 103°  
Max capacity: 8Kg


Diameter of hinge cup: 35mm  
Applicable door thickness: 14-22mm  
Features: 3D adjustable, one-section force gentle opening and closing, with hydraulic buffering



A	14	15	16	17	18	19	20	21	22
3	0.4	0.5	0.8	1.1	1.3	1.7	2.0	2.5	3.1
4	0.4	0.5	0.8	1.0	1.3	1.6	2.0	2.4	2.9
5	0.4	0.5	0.8	1.0	1.3	1.6	1.9	2.3	2.8
6	0.4	0.5	0.8	1.0	1.2	1.5	1.9	2.3	2.7




WJY2206A




H=16+K-D D:Cover position calculation value table

D	H	K	3	4	5	6	7
0	19	20	21	22	23		
2	17	18	19	20	21		
4							


Full cover

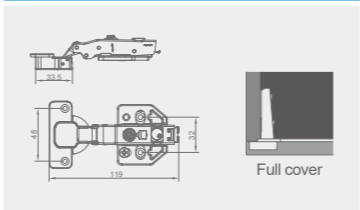

Installation dimensions of hinge cup

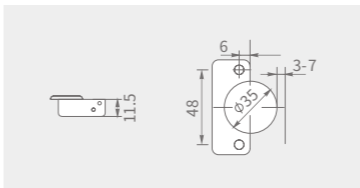


WJY2206B




H=6+K-D D:Cover position calculation value table

D	H	K	3	4	5	6	7
0	9	10	11	12	13		
2	7	8	9	10	11		
4							


Half cover



Installation dimensions of hinge cup




WJY2206C




H=3+K+A A:Gap position calculation value table

A	H	K	3	4	5	6	7
0	0	-1	-2	-3	-4		
2	2	1	0	-1	-2		
4							

Concealed

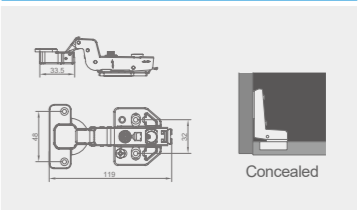

Installation dimensions of hinge cup

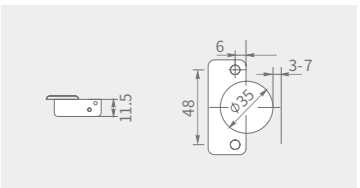




# Hydraulic cylinder block

Product name: Cabinet door hinge

Main material: Cold rolled steel plate  
Surface treatment: Nickel plating  
Opening angle: 103°  
Max capacity: 8Kg  
Diameter of hinge cup: 35mm


Applicable door thickness: 14-20mm  
/ Maximum door width 600mm  
Features: One section force, gentle opening and closing, with hydraulic buffering



A/K	14	15	16	17	18	19	20	21	22
3	0.4	0.5	0.8	1.1	1.3	1.7	2.0	2.5	3.1
4	0.4	0.5	0.8	1.0	1.3	1.6	2.0	2.4	2.9
5	0.4	0.5	0.8	1.0	1.3	1.6	1.9	2.3	2.8
6	0.4	0.5	0.8	1.0	1.2	1.5	1.9	2.3	2.7

WJY1201A


Original model: WJY12A1




H=16+K-D D: Cover position calculation value table

D/H/K	3	4	5	6	7
0	19	20	21	22	23
2	17	18	19	20	21
4					

Full cover

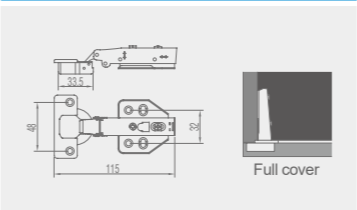


Installation dimensions of hinge cup

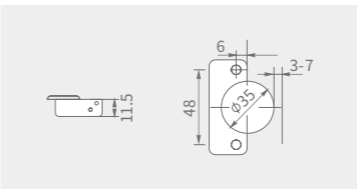

WJY1201B


Original model: WJY12A2




H=6+K-D D: Cover position calculation value table

D/H/K	3	4	5	6	7
0	9	10	11	12	13
2	7	8	9	10	11
4					

Half cover

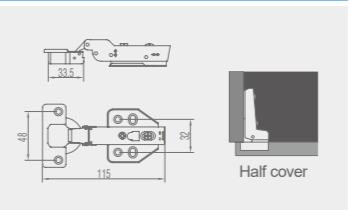


Installation dimensions of hinge cup

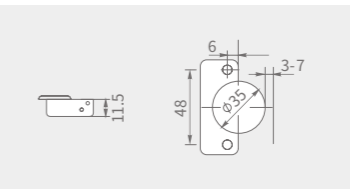

WJY1201C


Original model: WJY12A3




H=3+K+A A: Gap position calculation value table

A/H/K	3	4	5	6	7
0	0	-1	-2	-3	-4
2	2	1	0	-1	-2
4					

Concealed

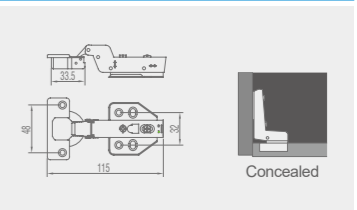

Installation dimensions of hinge cup

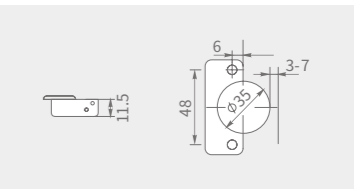




Product name: Cabinet door hinge

Main material: Cold rolled steel plate  
Surface treatment: Nickel plating  
Opening angle: 103°  
Max capacity: 8Kg  
Diameter of hinge cup: 35mm


Applicable door thickness: 14-20mm  
/ Maximum door width 600mm  
Features: One section force, gentle opening and closing, with hydraulic buffering



A	14	15	16	17	18	19	20	21	22
3	0.4	0.5	0.8	1.1	1.3	1.7	2.0	2.5	3.1
4	0.4	0.5	0.8	1.0	1.3	1.6	2.0	2.4	2.9
5	0.4	0.5	0.8	1.0	1.3	1.6	1.9	2.3	2.8
6	0.4	0.5	0.8	1.0	1.2	1.5	1.9	2.3	2.7

WJY2201A


Original model: WJY22A1  
Removable




H=16+K-D D: Cover position calculation value table

D	H	K	3	4	5	6	7
0	19	20	21	22	23		
2	17	18	19	20	21		
4							

Full cover

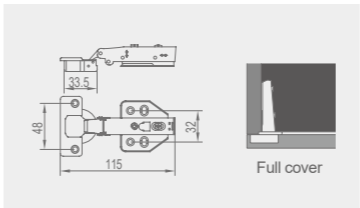


Installation dimensions of hinge cup

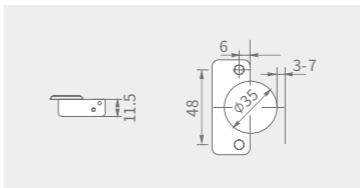

WJY2201B


Original model: WJY22A2  
Removable




H=6+K-D D: Cover position calculation value table

D	H	K	3	4	5	6	7
0	9	10	11	12	13		
2	7	8	9	10	11		
4							

Half cover

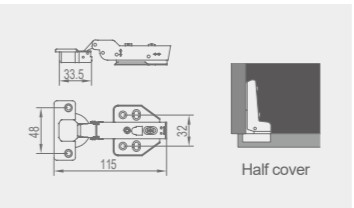


Installation dimensions of hinge cup

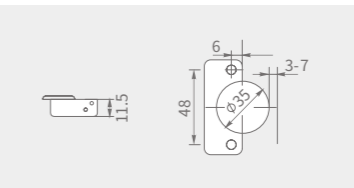

WJY2201C


Original model: WJY22A3  
Removable




H=3+K+A A: Gap position calculation value table

A	H	K	3	4	5	6	7
0	0	-1	-2	-3	-4		
2	2	1	0	-1	-2		
4							

Concealed

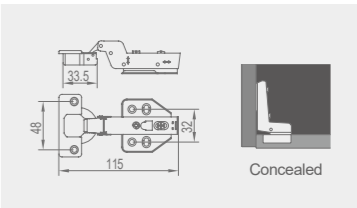

Installation dimensions of hinge cup

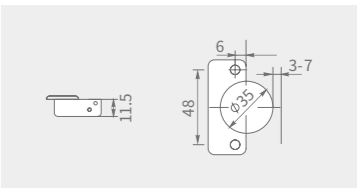




Product name: Cabinet door hinge


Main material: Cold rolled steel plate  
Surface treatment: Gun gray/  
Nickel plating  
Opening angle: 100°  
Max capacity: 8Kg

Optional aluminum frame thickness: 18-22mm  
Optional aluminum frame width: 18-24mm  
Features: Gentle opening and closing,  
With hydraulic buffering



A\W	20	21	22	23	24	25	26
20	1.1	1.2	1.3	1.4	1.5	1.6	1.7
21	1.0	1.1	1.2	1.3	1.4	1.5	1.6
22	0.9	1.0	1.1	1.2	1.3	1.4	1.5
23	0.8	0.9	1.0	1.1	1.2	1.3	1.4
24	0.7	0.8	0.9	1.0	1.1	1.2	1.3
25	0.6	0.7	0.8	0.9	1.0	1.2	1.3


WJY1209A




H=-1+W-D D:Cover position calculation value table

D\H\W	19	20	21	22	23	24	25	26
0	20	21	22	23	24	25	26	27
2	18	19	20	21	22	23	24	25
4	16	17	18	19	20	21	22	23


Full cover

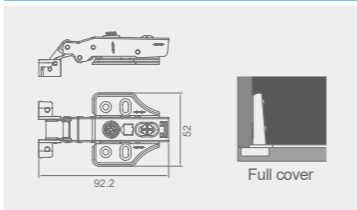

Installation dimensions of cup head

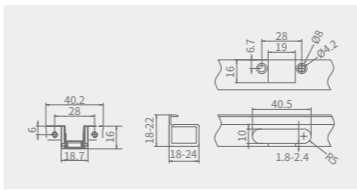


WJY1209B




H=-10+W-D D:Cover position calculation value table

D\H\W	19	20	21	22	23	24	25	26
0	9	10	11	12	13	14	15	16
2	7	8	9	10	11	12	13	14
4	5	6	7	8	9	10	11	12


Half cover



Installation dimensions of cup head




WJY1209C





H=-19+W+A A:Gap position calculation value table

A\H\W	19	20	21	22	23	24	25	26
0	0	-1	-2	-3	-4	-5	-6	-7
2	2	1	0	-1	-2	-3	-4	-5
4	4	3	2	1	0	-1	-2	-3

Concealed

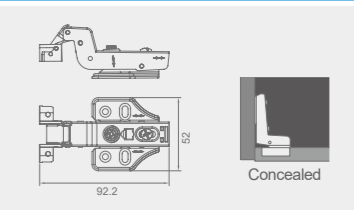

Installation dimensions of cup head

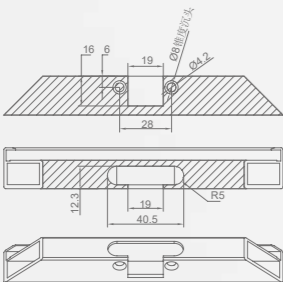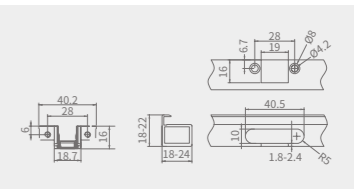


Profile hole drawing

# Soft opening and closing

Product name: Cabinet door hinge


Main material: 304  
Surface treatment: Electrolysis  
Opening angle: 103°  
Max capacity: 8Kg  
Diameter of hinge cup: 35mm

Applicable door thickness: 14-20mm  
/ Maximum door width 600mm  
Features: One section force, gentle opening and closing, with hydraulic buffering



A	14	15	16	17	18	19	20	21	22
3	0.4	0.5	0.8	1.1	1.3	1.7	2.0	2.5	3.1
4	0.4	0.5	0.8	1.0	1.3	1.6	2.0	2.4	2.9
5	0.4	0.5	0.8	1.0	1.3	1.6	1.9	2.3	2.8
6	0.4	0.5	0.8	1.0	1.2	1.5	1.9	2.3	2.7


WJY1211A




H=16+K-D D:Cover position calculation value table

D	H	K	3	4	5	6	7
0	19	20	21	22	23		
2	17	18	19	20	21		
4							


Full cover

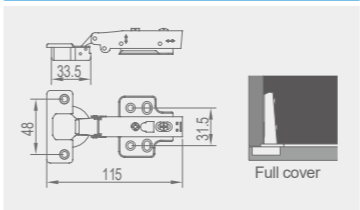

Installation dimensions of hinge cup

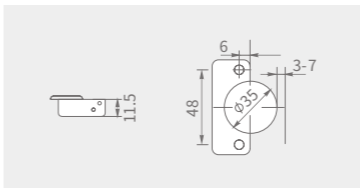


WJY1211B




H=6+K-D D:Cover position calculation value table

D	H	K	3	4	5	6	7
0	9	10	11	12	13		
2	7	8	9	10	11		
4							


Half cover



Installation dimensions of hinge cup




WJY1211C




H=3+K+A A:Gap position calculation value table


A	H	K	3	4	5	6	7
0	0	-1	-2	-3	-4		
2	2	1	0	-1	-2		
4							

Concealed



Installation dimensions of hinge cup




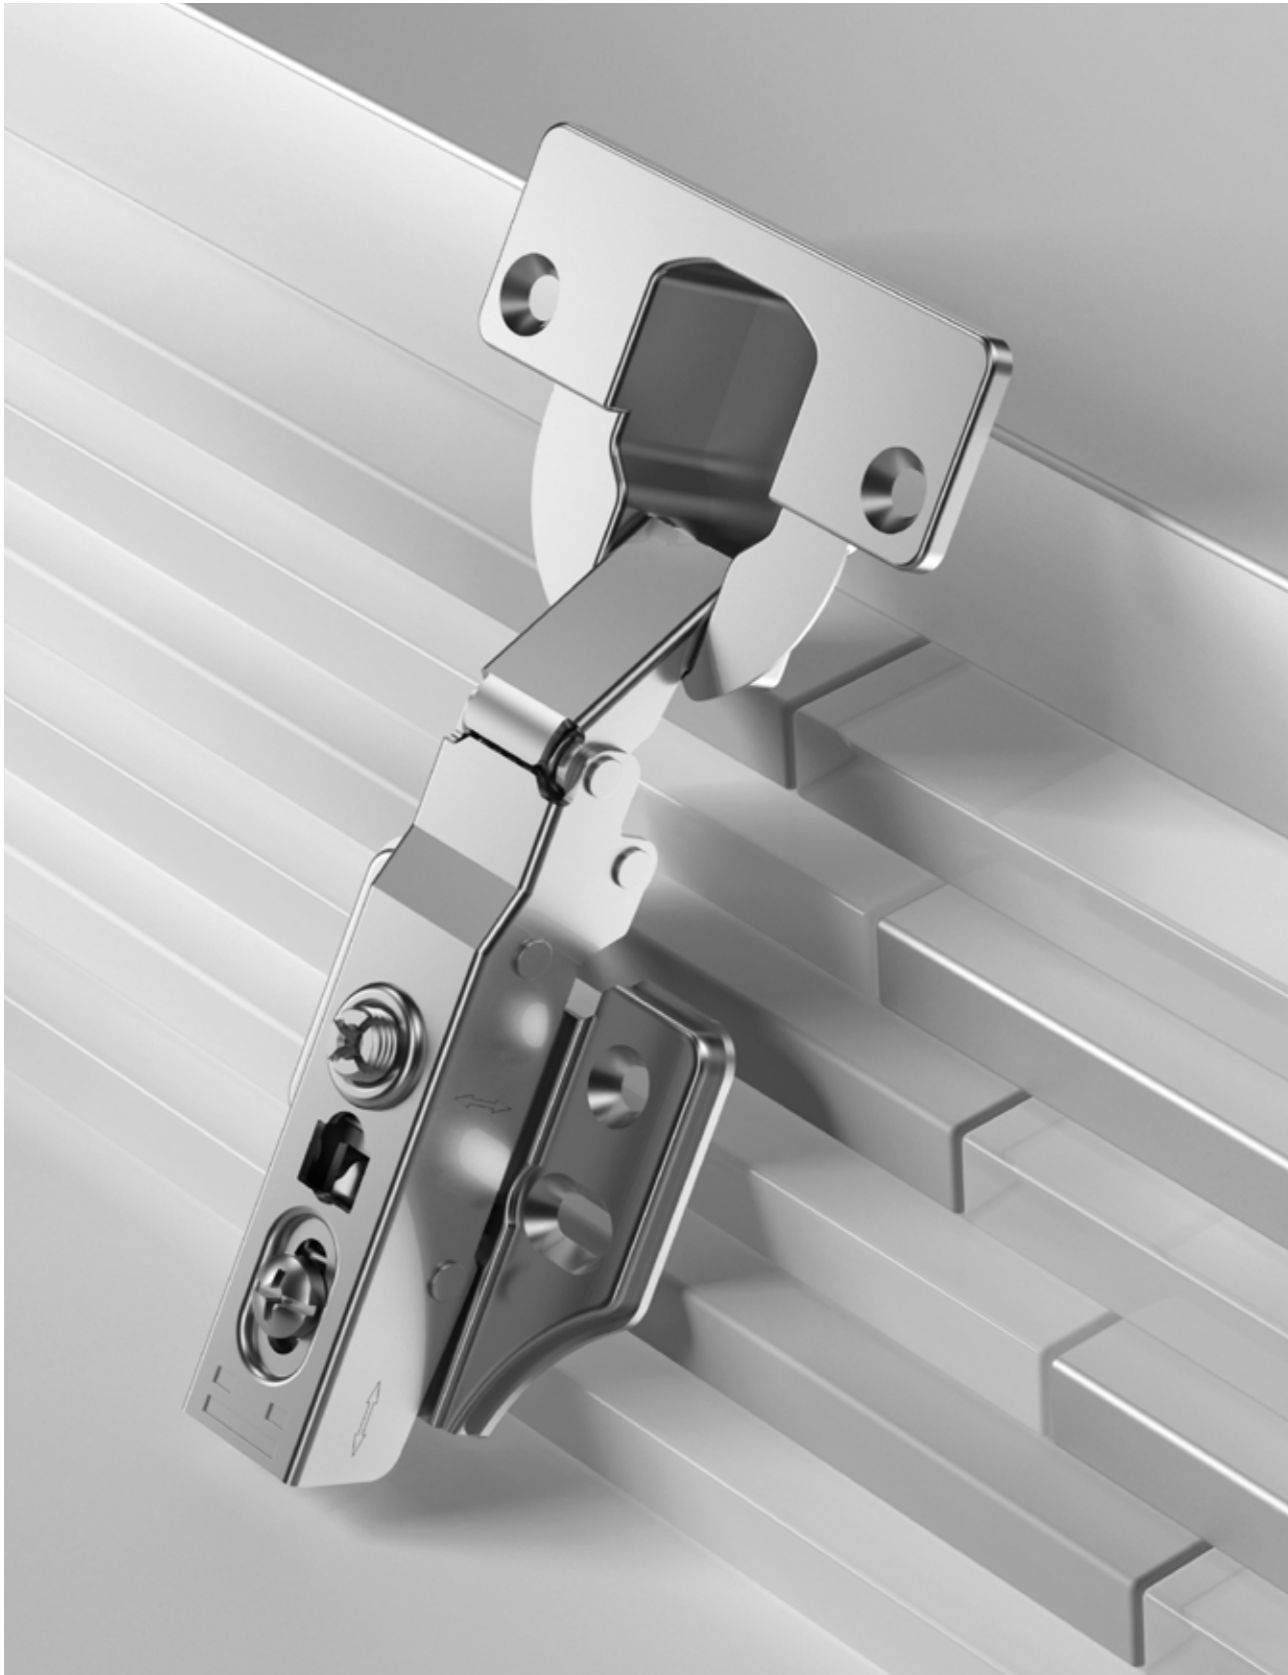

Product name: Cabinet door hinge

Main material: 304  
Surface treatment: Electrolysis  
Opening angle: 103°  
Max capacity: 8Kg  
Diameter of hinge cup: 35mm


Applicable door thickness: 14-20mm  
/ Maximum door width 600mm  
Features: One section force, gentle opening and closing, with hydraulic buffering



A	14	15	16	17	18	19	20	21	22
3	0.4	0.5	0.8	1.1	1.3	1.7	2.0	2.5	3.1
4	0.4	0.5	0.8	1.0	1.3	1.6	2.0	2.4	2.9
5	0.4	0.5	0.8	1.0	1.3	1.6	1.9	2.3	2.8
6	0.4	0.5	0.8	1.0	1.2	1.5	1.9	2.3	2.7

WJY2211A


Removable




H=16+K-D D:Cover position calculation value table

D	H	K	3	4	5	6	7
0	19	20	21	22	23		
2	17	18	19	20	21		
4							

Full cover

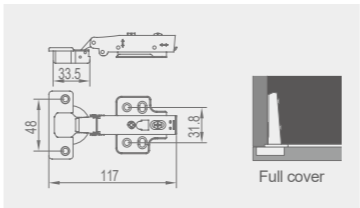


Installation dimensions of hinge cup

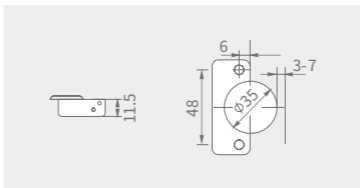

WJY2211B


Removable




H=6+K-D D:Cover position calculation value table

D	H	K	3	4	5	6	7
0	9	10	11	12	13		
2	7	8	9	10	11		
4							

Half cover

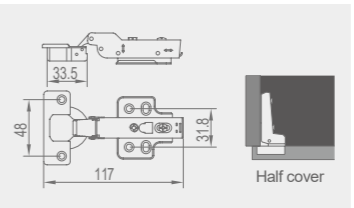


Installation dimensions of hinge cup

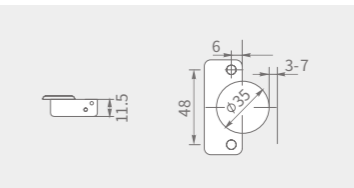

WJY2211C


Removable




H=3+K+A A:Gap position calculation value table

A	H	K	3	4	5	6	7
0	0	-1	-2	-3	-4		
2	2	1	0	-1	-2		
4							

Concealed

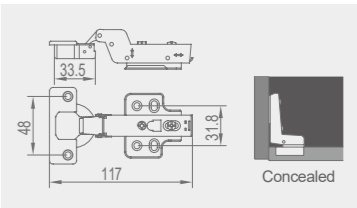


Installation dimensions of hinge cup

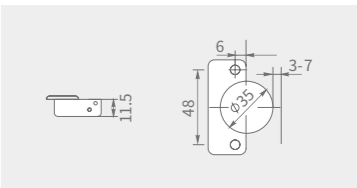

Product name: Cabinet door hinge

Main material: Cold rolled steel plate  
Surface treatment: Nickel plating  
Opening angle: 95°  
Max capacity: 8Kg  
Diameter of hinge cup: 40mm

Applicable door thickness:16-30mm  
/ Maximum door width 600mm  
Features: One section force, gentle  
opening and closing, with hydraulic  
buffering




A\K	T	20	21	22	23	24	25	26	27	28	29	30
3	0.4	0.5	0.7	0.8	1.0	1.1	1.3	1.5	1.8	2.5	3.4	
4	0.4	0.5	0.7	0.8	0.9	1.1	1.3	1.5	1.7	2.0	2.9	
5	0.4	0.5	0.6	0.8	0.9	1.1	1.3	1.5	1.7	1.9	2.2	
6	0.4	0.5	0.6	0.8	0.9	1.1	1.3	1.5	1.7	1.9	2.2	
7	0.4	0.5	0.6	0.8	0.9	1.1	1.2	1.4	1.6	1.9	2.1	
8	0.4	0.5	0.6	0.8	0.9	1.0	1.2	1.4	1.6	1.8	2.1	
9	0.4	0.5	0.6	0.7	0.9	1.0	1.2	1.4	1.6	1.8	2.1	
10	0.4	0.5	0.6	0.7	0.9	1.0	1.2	1.4	1.6	1.8	2.0	
11	0.4	0.5	0.6	0.7	0.9	1.0	1.2	1.4	1.6	1.8	2.0	

Product name: Cabinet door hinge


Main material: Cold rolled steel plate  
Surface treatment: Nickel plating  
Opening angle: 95°  
Max capacity: 8Kg  
Diameter of hinge cup: 40mm

Applicable door thickness:16-30mm  
/ Maximum door width 600mm  
Features: One section force, gentle  
opening and closing, with hydraulic  
buffering



A\K	T	20	21	22	23	24	25	26	27	28	29	30
3	0.4	0.5	0.7	0.8	1.0	1.1	1.3	1.5	1.8	2.5	3.4	
4	0.4	0.5	0.7	0.8	0.9	1.1	1.3	1.5	1.7	2.0	2.9	
5	0.4	0.5	0.6	0.8	0.9	1.1	1.3	1.5	1.7	1.9	2.2	
6	0.4	0.5	0.6	0.8	0.9	1.1	1.3	1.5	1.7	1.9	2.2	
7	0.4	0.5	0.6	0.8	0.9	1.1	1.2	1.4	1.6	1.9	2.1	
8	0.4	0.5	0.6	0.8	0.9	1.0	1.2	1.4	1.6	1.8	2.1	
9	0.4	0.5	0.6	0.7	0.9	1.0	1.2	1.4	1.6	1.8	2.1	
10	0.4	0.5	0.6	0.7	0.9	1.0	1.2	1.4	1.6	1.8	2.0	
11	0.4	0.5	0.6	0.7	0.9	1.0	1.2	1.4	1.6	1.8	2.0	


WJY1202A




H=20+K-D D:Cover position calculation value table

D\H	K	3	4	5	6	7	8	9	10
0		23	24	25	26	27	28	29	30
2		21	22	23	24	25	26	27	28
4									


Full cover

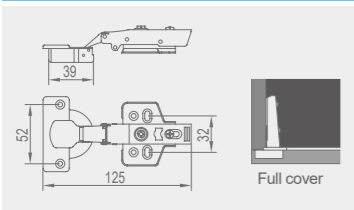

Installation dimensions of hinge cup

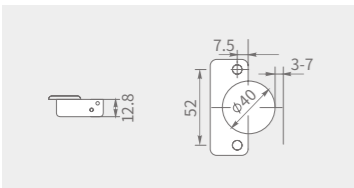


WJY1202B




H=13+K-D D:Cover position calculation value table

D\H	K	3	4	5	6	7	8	9	10
0		16	17	18	19	20	21	22	23
2		14	15	16	17	18	19	20	21
4									


Half cover



Installation dimensions of hinge cup




WJY1202C




H=3+K+A A: Gap position calculation value table (Minimum gap)

A\H	K	3	4	5	6	7
0		0	-1	-2		
2						
4						

Concealed

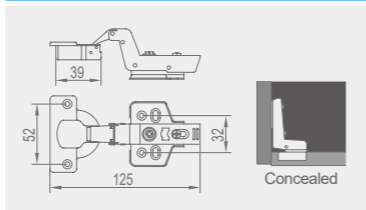


Installation dimensions of hinge cup

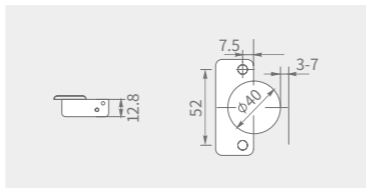

WJY2202A


Removable




H=20+K-D D:Cover position calculation value table

D\H	K	3	4	5	6	7	8	9	10
0		23	24	25	26	27	28	29	30
2		21	22	23	24	25	26	27	28
4									

Full cover

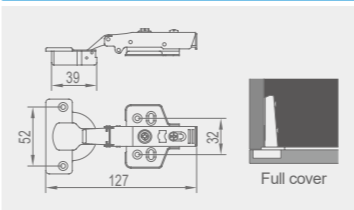


Installation dimensions of hinge cup

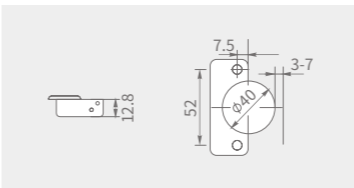

WJY2202B


Removable




H=13+K-D D:Cover position calculation value table

D\H	K	3	4	5	6	7	8	9	10
0		16	17	18	19	20	21	22	23
2		14	15	16	17	18	19	20	21
4									

Half cover

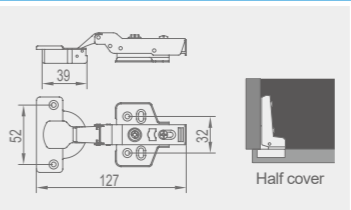


Installation dimensions of hinge cup

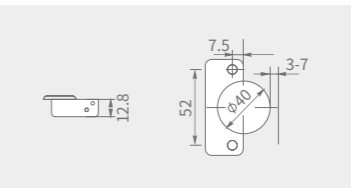

WJY2202C


Removable




H=3+K+A A: Gap position calculation value table (Minimum gap)

A\H	K	3	4	5	6	7
0		0	-1	-2		
2						
4						

Concealed

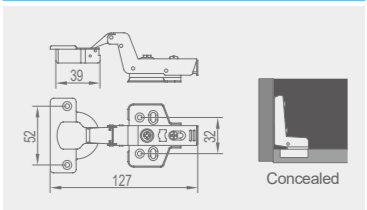

Installation dimensions of hinge cup

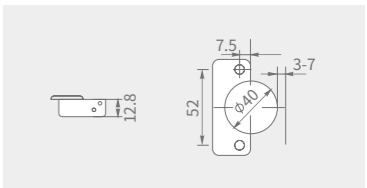



## Drawer Guide Rail



## Drawer guide rail Craftsmanship quality

*Do not change the original intention, use  
environmentally friendly galvanized sheet  
High quality silent guide rail,  
Ten thousand pull tests are still smooth.*


## Silent ball three section track



### WJH21010

Length specification: 10" 12" 14" 16" 18" 20"

Product name: Drawer guide rail  
Main material: Cold rolled steel plate  
Surface treatment: Black  
Maximum bearing capacity: 45Kg  
Features: Three sections fully pulled out, with positioning, silent sliding

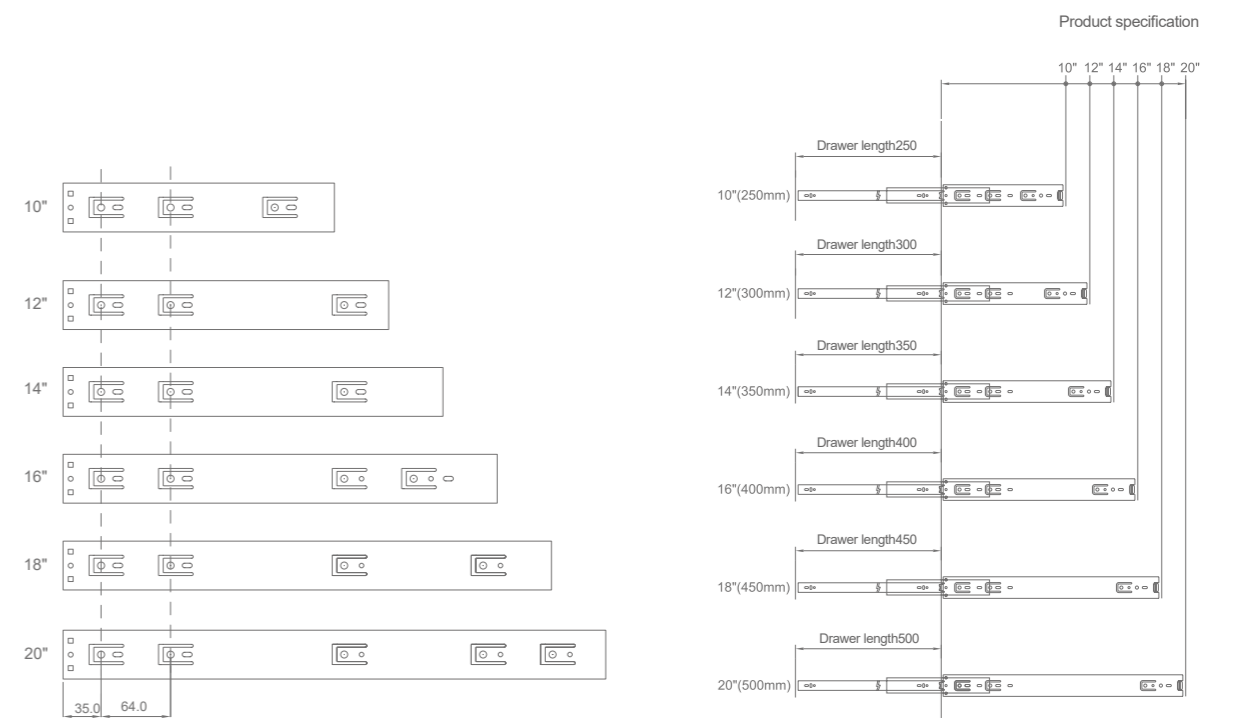




WJH22010


Length specification:10" 12" 14" 16" 18" 20"

Product name: Drawer guide rail  
Main material: Cold rolled steel plate  
Surface treatment: Black  
Maximum bearing capacity: 40Kg  
Features: Three sections fully pulled out, damping and buffering, automatic reset, silent sliding

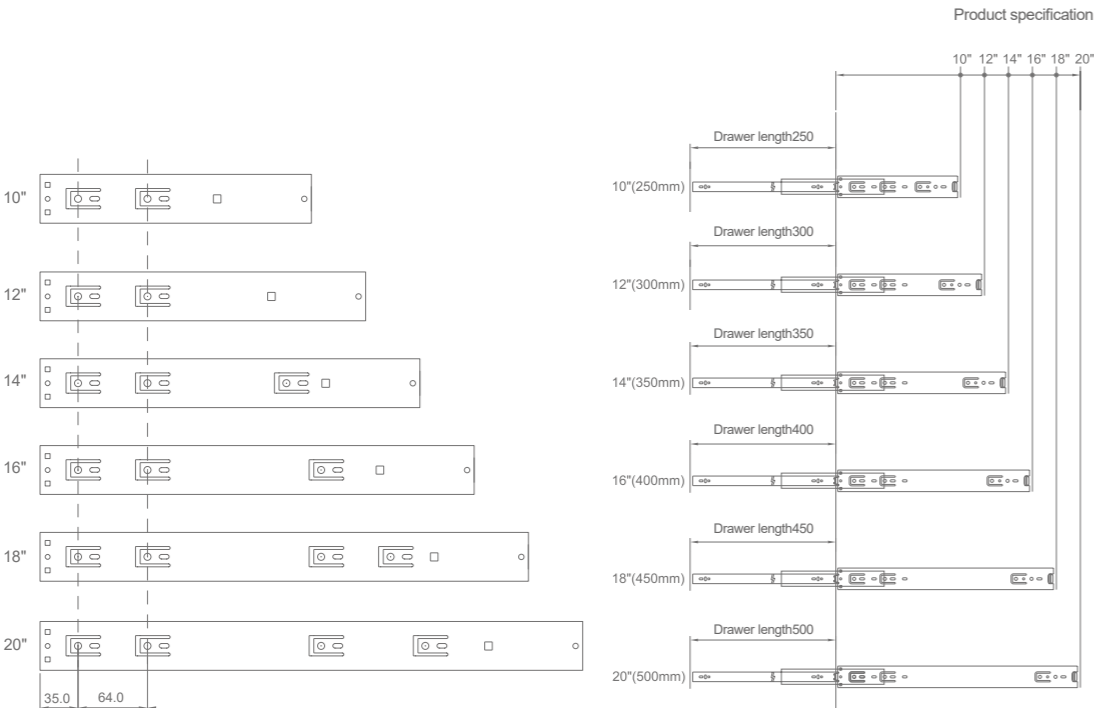

WJH23210

Product name: Drawer guide rail (Rebound track)  
Main material: Cold rolled steel plate  
Surface treatment: Black  
Maximum bearing capacity: 40Kg  
Features: Three section full pull out, silent sliding, with rebound function

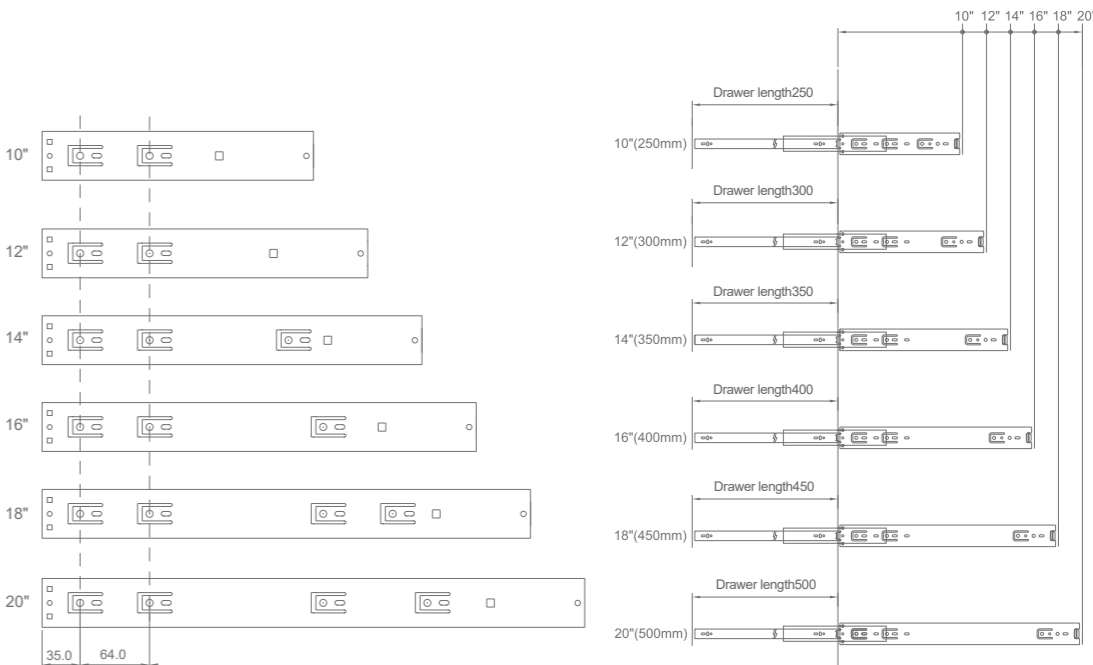

## Cushion damping to prevent hand gripping




### WJH31010

Length specification: 12" 14" 16" 18"

Product name: Drawer guide rail  
Main material: Environmentally friendly galvanized sheet  
Surface treatment: Galvanized  
Maximum bearing capacity: 25Kg  
Functional features: Two rails, 3/4 pull open, with silent sliding;  
Automatic reset, anti-collision and anti-detachment, damping and buffering function

Product specification

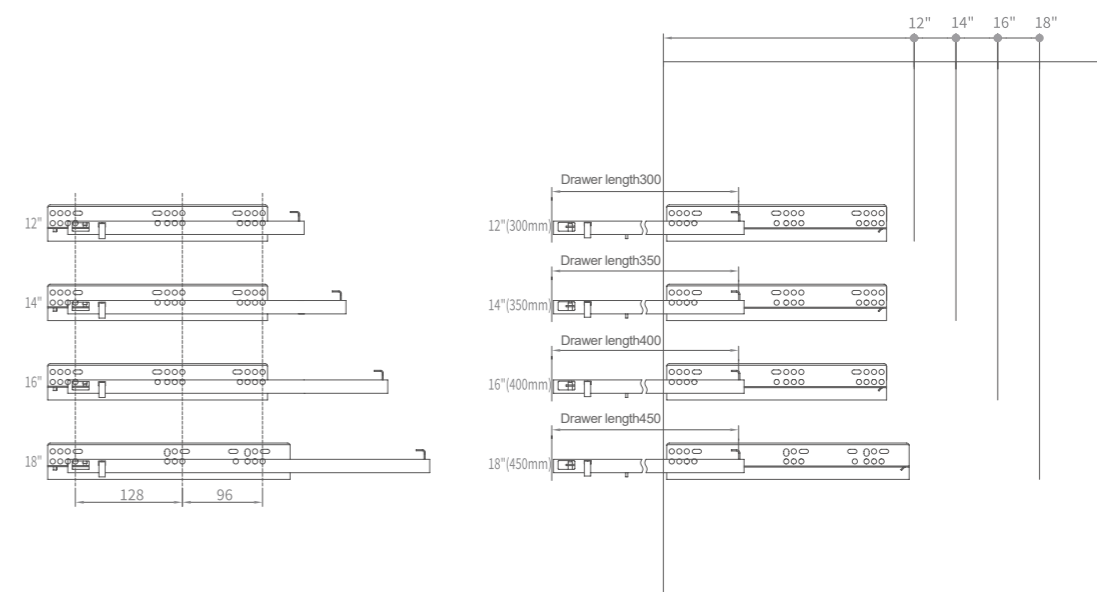




### WJH31210

Length specification: 12" 14" 16" 18"

Product name: Drawer guide rail  
Main material: Environmentally friendly galvanized sheet  
Surface treatment: Galvanized  
Maximum bearing capacity: 25Kg  
Functional features: Three-section rail, fully pulled out, with silent sliding; Automatic reset, anti-collision and anti-detachment, damping and buffering function

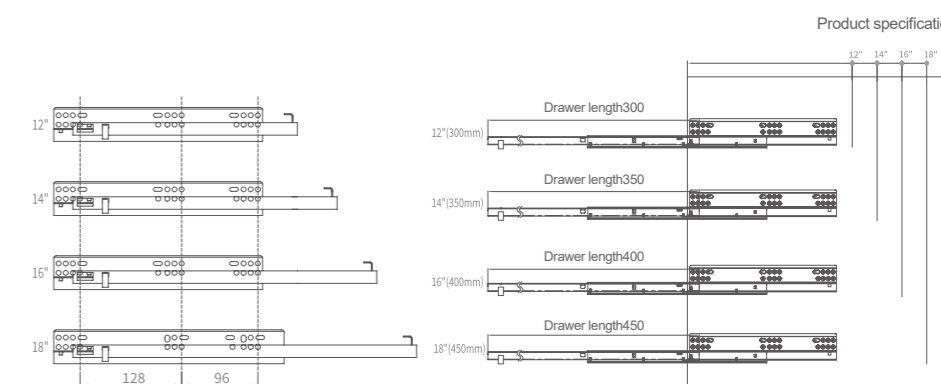

Environmentally friendly galvanized sheet

Using high-density environmentally friendly boards  
Maximum load-bearing capacity of 25KG



Backboard hook

Drill holes at the corresponding positions of the barb  
Hang the barb in the hole  
Prevent drawers from sliding inward



Porous positioning

Uniform distribution of screw holes  
Stable structure  
Easy to install

## Silent Smooth




## Drawer Guide Rail



### WJH33210

Length specification: 12" 14" 16" 18"

Product name: Drawer guide rail (Rebound bottom rail)  
Main material: Environmentally friendly galvanized sheet  
Surface treatment: Galvanized  
Maximum bearing capacity: 35Kg  
Applicable side plate thickness: 16mm  
Functional features: Three-section rail, fully pulled out, with silent sliding; Automatic reset, anti-collision and anti-detachment, damping and buffering function

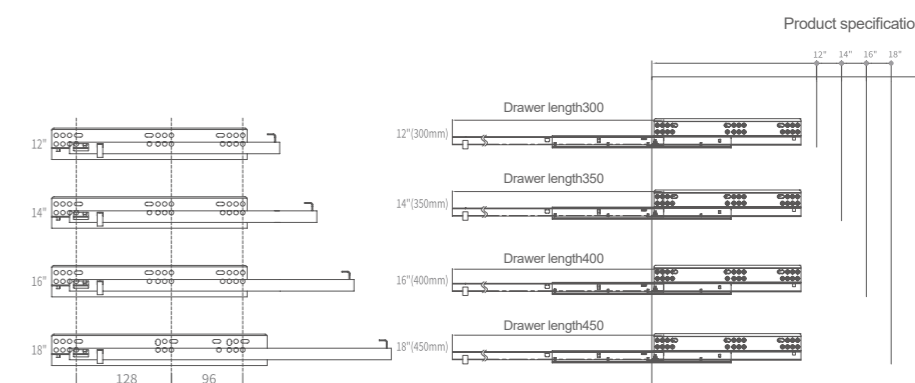



## Cabinet Door Handle



## Cabinet door handle Light luxury and simplicity


*The streamlined design looks simple,  
One stroke at a time, the rhythm and poetic in  
slow time, Make people feel comfortable both  
physically and mentally.*



#### WJL22110

Surface treatment: Matte black


Product name: Cabinet door handle  
Main material: Aluminum alloy



#### WJL22120

Surface treatment: Matte black


Product name: Cabinet door handle  
Main material: Aluminum alloy



#### WJL22130

Surface treatment: Matte black


Product name: Cabinet door handle  
Main material: Aluminum alloy



#### WJL22140

Surface treatment: Sandblasting Persian gray

Product name: Cabinet door handle  
Main material: Aluminum alloy



#### WJL22150

Surface treatment: Sandblasting Persian gray


Product name: Hidden buckle handle  
Main material: Aluminum alloy



#### WJL22160

Surface treatment: Brushed matte gray

Product name: Cabinet door handle  
Main material: Aluminum alloy






## Cabinet Door Handle



### WJL22050

Surface treatment: Satin

Product name: Cabinet door handle  
Main material: Aluminum alloy



### WJL22060

Surface treatment: Matte black


Product name: Cabinet door handle  
Main material: Aluminum alloy



### WJL22070

Surface treatment: Matte black


Product name: Cabinet door handle  
Main material: Aluminum alloy



### WJL22080

Surface treatment: Matte black

Product name: Cabinet door handle  
Main material: Aluminum alloy






# Cabinet Door Handle



**WJL22090**

Surface treatment: Matte black


Product name: Cabinet door handle  
Main material: Aluminum alloy



**WJL22100**

Surface treatment: Matte black

Product name: Cabinet door handle  
Main material: Aluminum alloy




## Mechanical Support



### WJC11020

Surface treatment: Nickel plating



Product name: Mechanical support  
Main material: Zinc alloy  
Single load capacity: 3kg  
Maximum opening: 105°  
Width/Applicable door height: 200-600mm



### WJC11030

Surface treatment: Nickel plating

Product name: Mechanical support  
Main material: Zinc alloy  
Single load capacity: 3kg  
Maximum opening: 105°  
Width/Applicable door height: 200-600mm

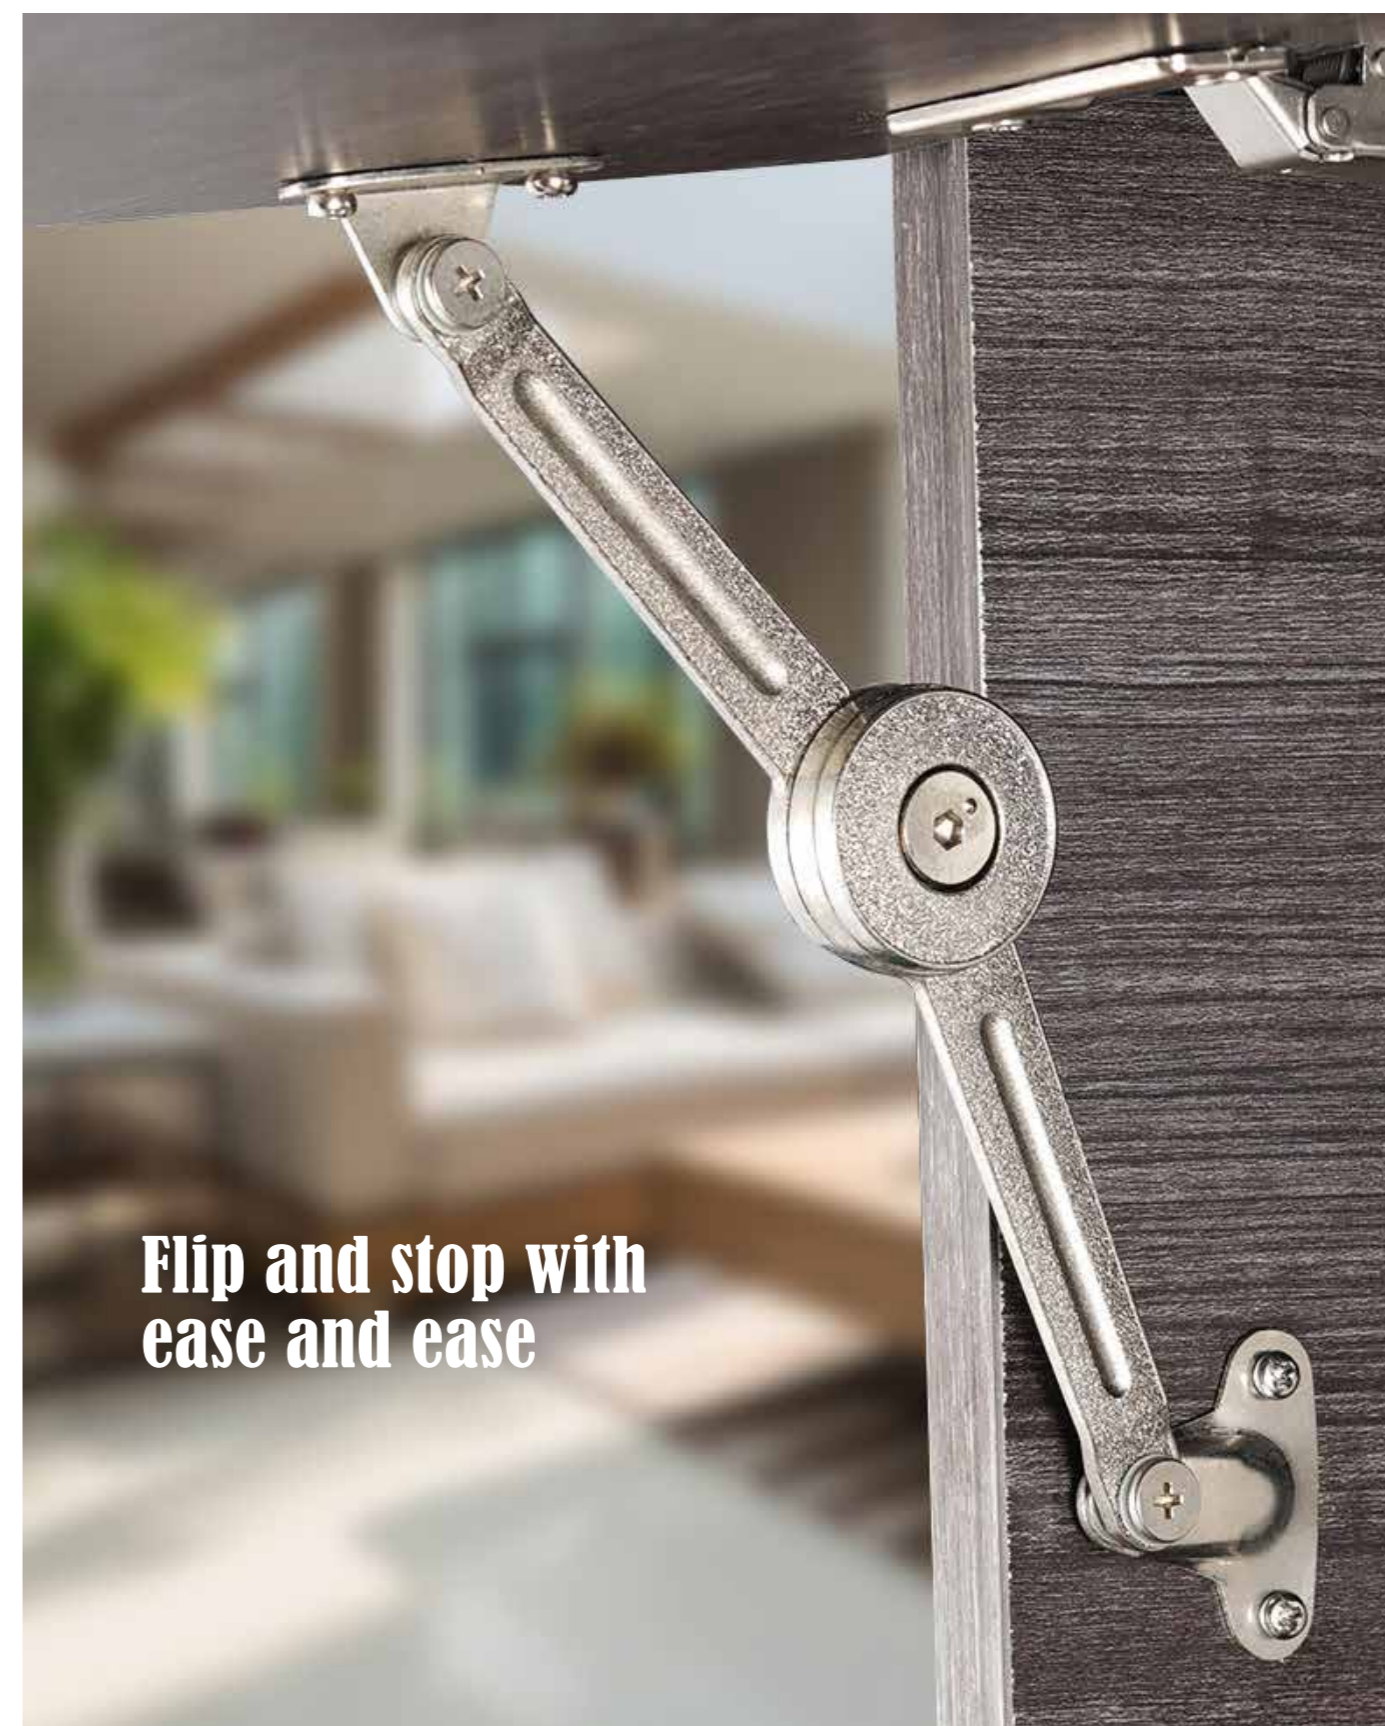

Flip and stop with  
ease and ease

## Polishing process thickened and wear-resistant




## Craftsmanship Quality



### WJF16020

Surface treatment: Chrome


Product name: Activity glass clip  
Main material: Zinc alloy



### WJF16030

Surface treatment: Hairline



Product name: Thick glass clip  
Main material: Zinc alloy



### WJF16040

Surface treatment: Chrome


Product name: C-shaped solid support  
Main material: Zinc alloy



### WJF16010

Surface treatment: Satin

Product name: 5-hole aluminum alloy (5cm)  
Main material: Aluminum alloy





## Clothing rod tube & Clothing rod seat




### WJF11050

Surface treatment: Chrome

Product name: Clothes rod seat

Main material: Zinc alloy





### WYG12050

Surface treatment:  
Aluminum natural color

Product name: Minimalist aluminum  
clothes hook

Main material: Aluminum alloy



### WJF11040

Surface treatment: Brushed matte gray

Product name: Clothes rod tube

Main material: Aluminum alloy




### WJF11070

Surface treatment: Brushed matte gray

Product name: Clothes rod seat

Main material: Aluminum alloy



## Preferred material for rust prevention and wear resistance




## Clothing rod tube &Clothing rod seat



### WJF11020

Surface treatment:Chrome


Product name: Clothes rod seat  
Main material: Zinc alloy



### WJF10010

Surface treatment:Silver white oxidation

Product name: Clothes rod tube  
Main material: Aluminum alloy



### WJF10020

Surface treatment: Mirror


Product name: Clothes rod tube  
Main material: 304



### WJF11010

Surface treatment:Chrome

Product name: Clothes rod seat  
Main material: Zinc alloy





Attractive and durable


## Wardrobe Foot



### WJF15010

Surface treatment: Sand silver


Product name: Wardrobe feet  
Main material: Stainless steel  
Adjustable height: 8mm



### WJF15020

Surface treatment: Brushed gray


Product Name: Wardrobe feet  
Main material: Aluminum alloy  
Adjustable height: 8mm



### WJF15030

Surface treatment: Hairline


Product name: Wardrobe feet  
Main material: Stainless steel  
Adjustable height: 15mm



### WJF15040

Surface treatment: Black

Product name: Wardrobe feet  
Main material: Iron




## Wine glass holder&Towel rack



### WJL52010

Surface treatment: Orange

Product Name: Bookshelf rack  
Main material: Aluminum alloy



### WJL52030

Surface treatment: Matte black


Product name: Clothes rack  
Main material: Aluminum alloy



### WJL52040

Surface treatment: Matte black


Product name: Towel rack  
Main material: Aluminum alloy



### WJF13060

Surface treatment: Aluminum natural color


Product name: Rebound device  
Main material: Aluminum alloy  
Adjustable distance: 1-5mm  
Pop up length: 52mm  
Elastic force: 20N



### WJF13070

Surface treatment: Aluminum natural color


Product name: Rebound device  
Main material: Aluminum alloy  
Adjustable distance: 1-5mm  
Pop up length: 52mm  
Elastic force: 20N



### WJF13050

Surface treatment: Blue


Product name: Rebound device (buffer core)  
Main material: Plastics  
Pop up length: 10mm  
Elastic force: 8N



### WJF13010

Surface treatment: White


Product name: Rebound device  
Main material: Plastics



### WJF13030

Surface treatment: White


Product name: Rebound device  
Main material: Plastics



### WJF13040

Surface treatment: White

Product name: Rebound device  
Main material: Plastics





**FOR BETTER  
LIVING**