

* All rights reserved.
* 版权由坚宜佳公司所有，严禁翻版和影印。
* 本公司产品已申请中国专利，严禁仿制，违者负法律责任。
* 2024 年 1 月印刷。
* Published in Jan,2024



扫一扫，了解更多资讯




一站式建材集采服务平台



了解更多信息关注
坚朗官方抖音号

Kinex® 坚宜佳®
KIN LONG
智能家居 · 建筑五金

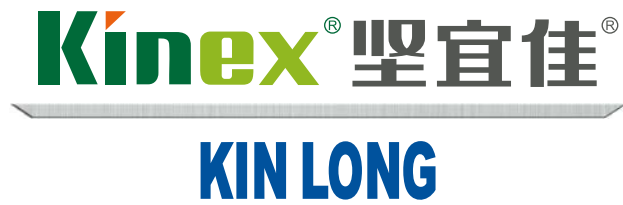

门控五金典型产品目录

Door Control Hardware Typical Product Catalogue



门控五金典型产品目录



广东坚宜佳五金制品有限公司
GUANGDONG KINEX HARDWARE PRODUCTS CO.,LTD

广东省东莞市塘厦镇大坪长塘街10号
ADD: No.10Changtang Street,Daping,Tangxia Town,DongGuan
City,GuangDong Province,China

T: 0086-769-8299 8666 8989 0388
F: 0086-769-8295 5251 8989 0189
E: mail@kinex.com.cn
H: www.kinex.com.cn

www.kinex.com.cn



推拉门配件类 P1-18
Accessories for Sliding door

隐藏式推拉门系列 P1-4
Hidden sliding door series

挂式推拉门系列 P5-18
Hanging sliding door series



玻璃门配件类 P45-54
Accessories for Glass Door

门夹系列 P45-50
Patch Fitting Series

玻璃门锁系列 P51-54
Glass Door Lock series

插销系列 P54
Latch series



地弹簧类 P19-34
Floor Hinge series

地弹簧系列 P19-29
Floor Hinge series

地弹簧配件 P30-32
Accessories For Floor Hinge



型材门配件类 P55-64
Accessories for Profiles Door series

门轴、地轴系列 P55-62
Door axial,Pivot Hinge series

门锁、插销系列 P63-66
Door Lock,Latch series



闭门器类 P35-44
Door Closer series

暗装式闭门器系列 P37
Concealed Door Closer Series

明装式闭门器系列 P38-44
Exposed Door Closer Series



拉手类 P67-82
Handle series

1 Sliding Door Series

推拉门类

- 适用于单扇或双扇推拉门
- 适用于住宅、酒店、商铺、写字楼
- 滑轮具有高韧性、弹性、自润滑功能及减震静音
- 高度可调，消除部分现场误差

- Suitable for single-leaf or double-leaf sliding doors
- Suitable for residences, hotels, shops, office buildings
- The pulley has high toughness, elasticity, self-lubricating function and shock absorption and silence
- Adjustable height , eliminate some field errors



隐藏式推拉门配件 T1Y01 【80Kg】


Hidden sliding door fittings

适用最大门重 Applicable maximum door weight	80Kg
适用门扇厚度 Applicable minimum door thickness	10-12mm
适用门扇宽度 Applicable door leaf width	600-1000mm
适用门扇高度 Applicable door height	≤2200mm



注：暗拉手需另订购 Note: Concealed handle to be ordered separately

标准导轨长度L Standard Guide Rail Length L	单开门 Single-open Door		双开门 Double-open Door		B	C
	门扇宽度 Width	承重 Maximum loading	门扇宽度 Width	承重 Maximum loading		
1600mm	600~800mm	80kg	--	80kg*2	30mm	4*385mm
2400mm	800~1200mm	80kg	600mm	80kg*2	30mm	6*390mm
3200mm	--	80kg	600~800mm	80kg*2	40mm	8*390mm
4000mm	--	80kg	800~1000mm	80kg*2	50mm	10*390mm

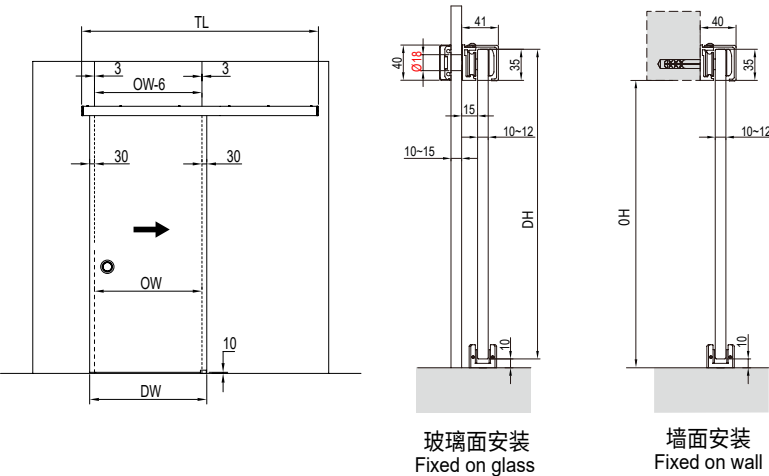

尺寸定义

Dimension definition

门扇宽度Door leaf width	DW
门洞宽度Door opening width	OW
固定扇宽度Fixed leaf width	FW
门扇高度Door leaf height	DH
门洞高度Door opening height	OH
吊轨长度Hanging rail length	TL


计算公式

Calculation formula

$$DH=OH+25$$
$$DW=OW+60$$


固定玻璃开孔

Secure glass openings

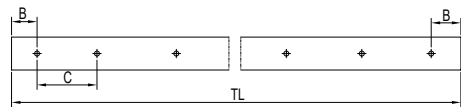

门扇玻璃开孔

The door panes were perforated

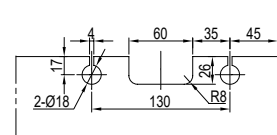

隐藏式推拉门配件 T1Y02 【80Kg】


Hidden sliding door fittings

适用最大门重 Applicable maximum door weight	80Kg
适用门扇厚度 Applicable minimum door thickness	10-12mm
适用门扇宽度 Applicable door leaf width	600-1000mm
适用门扇高度 Applicable door height	≤2200mm



注：移门锁需另订购 Note: Door lock to be ordered separately

标准导轨长度L Standard Guide Rail Length L	单开门 Single-open Door		双开门 Double-open Door		B	C
	门扇宽度 Width	承重 Maximum loading	门扇宽度 Width	承重 Maximum loading		
1600mm	600~800mm	80kg	--	80kg*2	30mm	4*385mm
2400mm	800~1200mm	80kg	600mm	80kg*2	30mm	6*390mm
3200mm	--	80kg	600~800mm	80kg*2	40mm	8*390mm
4000mm	--	80kg	800~1000mm	80kg*2	50mm	10*390mm

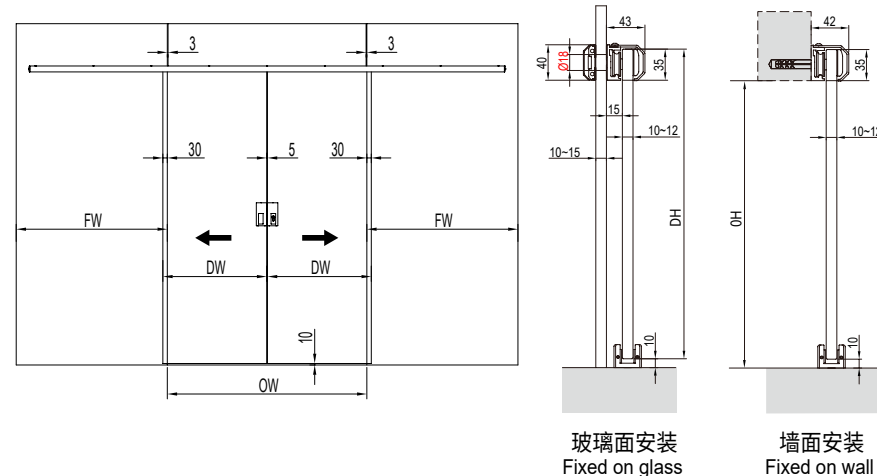

尺寸定义

Dimension definition

门扇宽度Door leaf width	DW
门洞宽度Door opening width	OW
固定扇宽度Fixed leaf width	FW
门扇高度Door leaf height	DH
门洞高度Door opening height	OH
吊轨长度Hanging rail length	TL


计算公式

Calculation formula

$$DH=OH+25$$
$$DW=OW/2+27.5$$


固定玻璃开孔

Secure glass openings

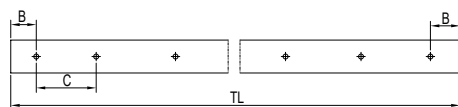

门扇玻璃开孔

The door panes were perforated

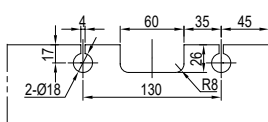


玻璃推拉门配件 T3G13 【60Kg】

Glass sliding door fittings




T3G13
吊轮组件 Hanging wheel

主要材质	锌合金+不锈钢	Main Material	Zinc alloy + stainless steel
门 重	≤60Kg	door weight	≤60Kg
门 厚	10-12mm	Door thickness	10-12mm
门 高	≤2300mm	Door height	≤2300mm
高度调节	±3mm	Height adjustment	±3mm
适用门型	全玻璃门	Apply the door type	The glass door




T3G92
吊轨 Hanging Rail

材 质	铝合金
表面处理	喷砂银白氧化
长度定制	
Material	Aluminum alloy
Surface Finish	Sand blasting silver white oxidation
Length customization	

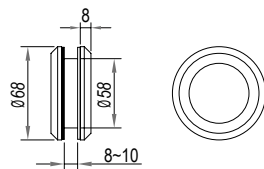


T1L03
暗拉手 Concealed handle

主要材质	304不锈钢	Main Material	S.S 304
表面处理	亚光	Surface Finish	Satin
适用门型	玻璃推拉门	Applicable Door Type	Glass sliding door
适用门扇厚度	8~10mm	Applicable Door Thickness	8-10mm
开孔尺寸	Φ60mm	Drilling Size	Φ60mm

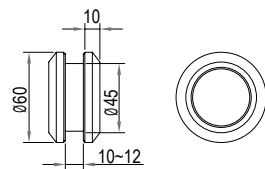

T1L04
暗拉手 Concealed handle

主要材质	304不锈钢	Main Material	S.S 304
表面处理	亚光	Surface Finish	Satin
适用门型	玻璃推拉门	Applicable Door Type	Glass sliding door
适用门扇厚度	10~12mm	Applicable Door Thickness	10~12mm
开孔尺寸	Φ47mm	Drilling Size	Φ47mm

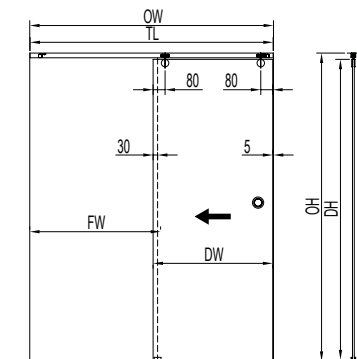

尺寸定义

Dimension definition

门扇宽度Door leaf width	DW
门洞宽度Door opening width	OW
固定扇宽度Fixed leaf width	FW
门扇高度Door leaf height	DH
门洞高度Door opening height	OH
吊轨长度Hanging rail length	TL



计算公式

Calculation formula

DH=OH-52
FW=OW/2+30
DW=FW-35
TL=OW-5

门扇玻璃开孔图

The door panes were perforated

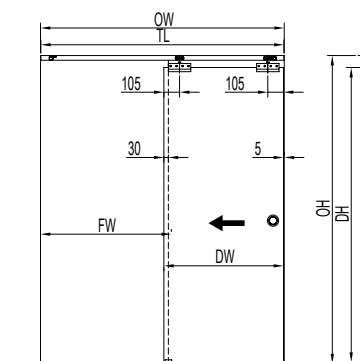

尺寸定义

Dimension definition

门扇宽度Door leaf width	DW
门洞宽度Door opening width	OW
固定扇宽度Fixed leaf width	FW
门扇高度Door leaf height	DH
门洞高度Door opening height	OH
吊轨长度Hanging rail length	TL


计算公式

Calculation formula

DH=OH-90
FW=OW/2+30
DW=FW-35
TL=OW-5

门扇玻璃开孔图

The door panes were perforated



木质推拉门配件系列

Wooden sliding door accessories series



木质推拉门配件 T3G03 【120Kg】


Wooden sliding door fittings



T3G03
吊轮组件 Hanging wheel


主要材质 高强度工程塑料+不锈钢
门 重 ≤120Kg
门 厚 ≥35mm
门 高 ≤2600mm
高度调节 ±5mm
适用门型 木门

Main Material High strength engineering plastics + stainless steel
Heavy door ≤120Kg
Door thickness ≥35mm
Door height ≤2600mm
Height adjustment ±5mm
Apply the door type Wooden door

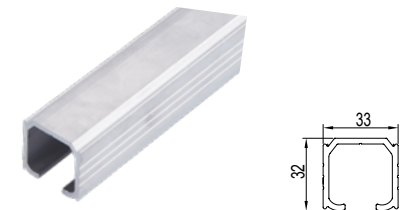

T3G90
吊轨 Hanging Rail


材 质 铝合金
表面处理 喷砂银白氧化
长度定制
Material Aluminum alloy
Surface Finish Sand blasting silver white oxidation
Length customization



T1L12
暗拉手 Concealed handle

主要材质 304不锈钢
表面处理 亚光
适用最小门厚 30mm
适用门型 木质推拉门
开槽尺寸 94*23*11mm

Main Material S.S 304
Surface Finish matte
Applicable minimum door thickness 30mm
Applicable Door Type Wooden sliding door
Slotting dimension 94*23*11mm

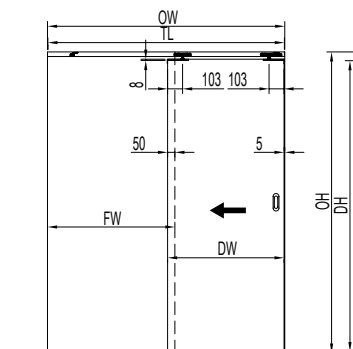


尺寸定义 Dimension definition

门扇宽度Door leaf width DW
门洞宽度Door opening width OW
固定扇宽度Fixed leaf width FW
门扇高度Door leaf height DH
门洞高度Door opening height OH
吊轨长度 Hanging rail length TL

计算公式 Calculation formula

DH=OH-60 (开槽安装 Slotted installation)
DH=OH-68 (不开槽安装 Installation without slotting)
FW=OW/2+50
DW=FW-55
TL=OW-5

门底导向件开孔图 Swing stopper Opening Hole

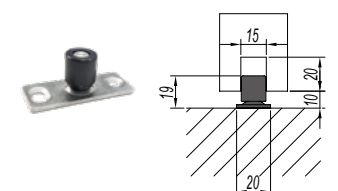

木/金属框推拉门配件 T3G06 【100Kg】

Wood/metal frame sliding door fittings




T3G06
吊轮组件 Hanging wheel

主要材质	高强度工程塑料+不锈钢	Main Material	High strength engineering plastics + Stainless steel
门 重	≤100Kg	Heavy door	≤100Kg
门 厚	≥30mm	Door thickness	≥30mm
门 高	≤2500mm	Door height	≤2500mm
高度调节	±3mm	Height adjustment	±3mm
适用门型	木门、铝框门、金属边框门	Apply the door type	wooden door aluminum frame door metal frame door




T3G94
吊轨 Hanging Rail

材 质	铝合金
表面处理	喷砂银白氧化
长度定制	
Material	Aluminum alloy
Surface Finish	Sand blasting silver white oxidation
Length customization	

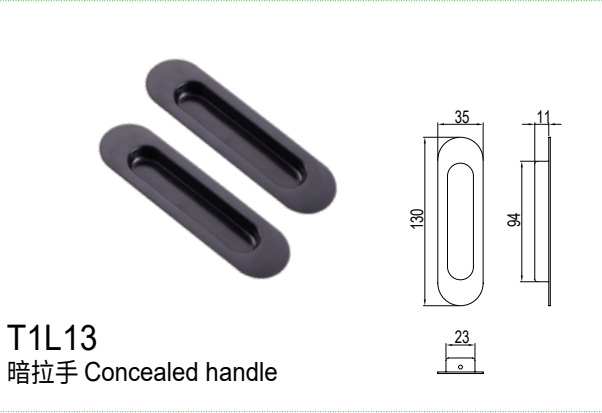

T1L13
暗拉手 Concealed handle

主要材质	304不锈钢	Main Material	S.S 304
表面处理	黑色	Surface Finish	black
适用最小门厚	30mm	Applicable minimum door thickness	30mm
适用门型	木质推拉门	Applicable Door Type	Wooden sliding door
开槽尺寸	94*23*11mm	Slotting dimension	94*23*11mm

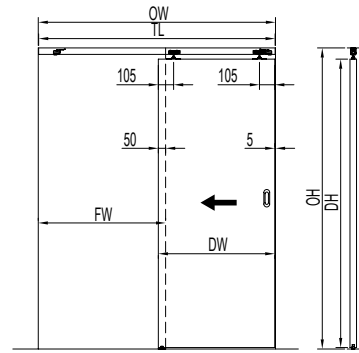


尺寸定义 Dimension definition

门扇宽度Door leaf width	DW
门洞宽度Door opening width	OW
固定扇宽度Fixed leaf width	FW
门扇高度Door leaf height	DH
门洞高度Door opening height	OH
吊轨长度 Hanging rail length	TL

计算公式 Calculation formula

DH=OH-87
FW=OW/2+50
DW=FW-55
TL=OW-5

门底导向件开孔图
Swing stopper Opening Hole

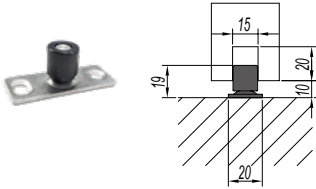

木质推拉门配件 T3G07 【100Kg】

Wooden sliding door fittings




T3G07
吊轮组件 Hanging wheel

主要材质	高强度工程塑料+不锈钢	Main Material	High strength engineering plastics + stainless steel
门 重	≤100Kg	Heavy door	≤100Kg
门 厚	≥35mm	Door thickness	≥35mm
门 高	≤2500mm	Door height	≤2500mm
高度调节	±3mm	Height adjustment	±3mm
适用门型	木门	Apply the door type	wooden door




T3G94
吊轨 Hanging Rail

材 质	铝合金
表面处理	喷砂银白氧化
长度定制	
Material	Aluminum alloy
Surface Finish	Sand blasting silver white oxidation
Length customization	

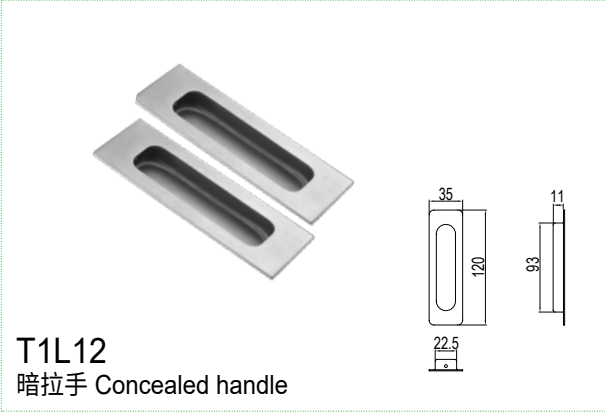

T1L12
暗拉手 Concealed handle

主要材质	304不锈钢	Main Material	S.S 304
表面处理	亚光	Surface Finish	matte
适用最小门厚	30mm	Applicable minimum door thickness	30mm
适用门型	木质推拉门	Applicable Door Type	Wooden sliding door
开槽尺寸	94*23*11mm	Slotting dimension	94*23*11mm

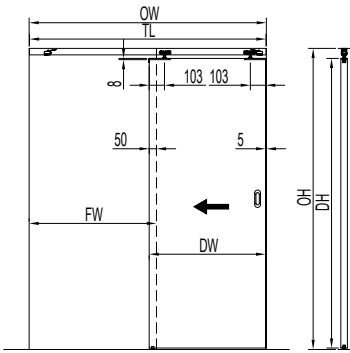


尺寸定义 Dimension definition

门扇宽度Door leaf width	DW
门洞宽度Door opening width	OW
固定扇宽度Fixed leaf width	FW
门扇高度Door leaf height	DH
门洞高度Door opening height	OH
吊轨长度 Hanging rail length	TL

计算公式 Calculation formula

DH=OH-79 (开槽安装 Slotted installation)
DH=OH-87 (不开槽安装 Installation without slotting)
FW=OW/2+50
DW=FW-55
TL=OW-5

门底导向件开孔图
Swing stopper Opening Hole

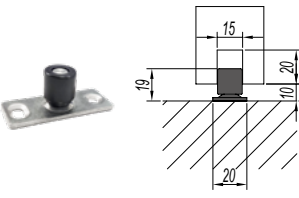

木/金属框缓冲推拉门配件 T3G06H 【100Kg】


Wooden/metal frame Locating piece sliding door fittings



主要材质	高强度工程塑料+不锈钢	Main Material	High strength engineering plastics + Stainless steel
门 重	≤100Kg	Heavy door	≤100Kg
门 厚	≥30mm	Door thickness	≥30mm
门 宽	≥790mm	The door wide	≥790mm
门 高	≤2500mm	Door height	≤2500mm
高度调节	±3mm	Height adjustment	±3mm
缓冲形式	双向缓冲	Buffer form	Bidirectional buffer
适用门型	木门、铝框门、金属边框门	Apply the door type	wooden door aluminum frame door metal frame door





材 质	铝合金
表面处理	喷砂银白氧化
长度定制	
Material	Aluminum alloy
Surface Finish	Sand blasting silver white oxidation
Length customization	

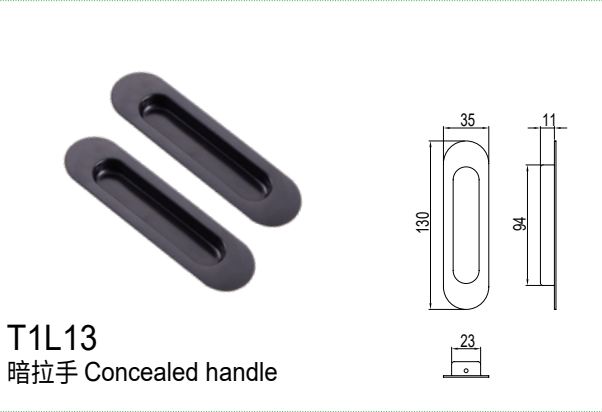

主要材质	304不锈钢
表面处理	黑色
适用最小门厚	30mm
适用门型	木质推拉门
开槽尺寸	94*23*11mm
Main Material	S.S 304
Surface Finish	black
Applicable minimum door thickness	30mm
Applicable Door Type	Wooden sliding door
Slotting dimension	94*23*11mm

门底导向件开孔图
Swing stopper Opening Hole

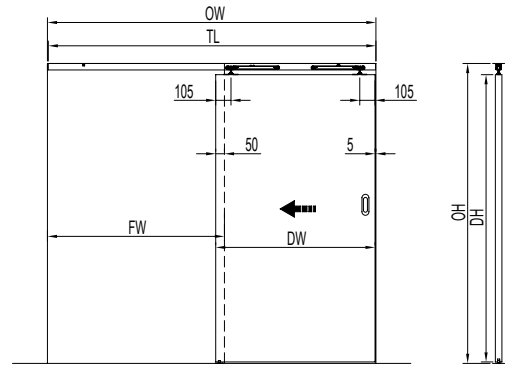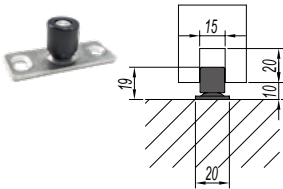

尺寸定义

Dimension definition	
门扇宽度Door leaf width	DW
门洞宽度Door opening width	OW
固定扇宽度Fixed leaf width	FW
门扇高度Door leaf height	DH
门洞高度Door opening height	OH
吊轨长度 Hanging rail length	TL

计算公式

Calculation formula
DH=OH-87
FW=OW/2+50
DW=FW-55
TL=OW-5

木质缓冲推拉门配件 T3G07H 【100Kg】


Wooden Locating piece sliding door fittings



主要材质	高强度工程塑料+不锈钢	Main Material	High strength engineering plastics + Stainless steel
门 重	≤100Kg	Heavy door	≤100Kg
门 厚	≥35mm	Door thickness	≥35mm
门 宽	≥900mm	The door wide	≥900mm
门 高	≤2500mm	Door height	≤2500mm
高度调节	±3mm	Height adjustment	±3mm
缓冲形式	双向缓冲	Buffer form	Bidirectional buffer
适用门型	木门	Apply the door type	wooden door





材 质	铝合金
表面处理	喷砂银白氧化
长度定制	
Material	Aluminum alloy
Surface Finish	Sand blasting silver white oxidation
Length customization	

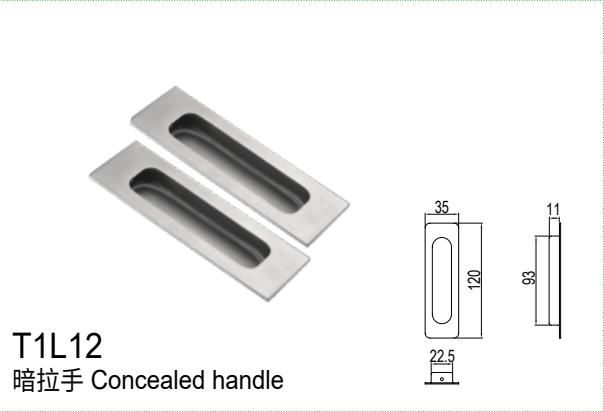

主要材质	304不锈钢
表面处理	亚光
适用最小门厚	30mm
适用门型	木质推拉门
开槽尺寸	94*23*11mm
Main Material	S.S 304
Surface Finish	matte
Applicable minimum door thickness	30mm
Applicable Door Type	Wooden sliding door
Slotting dimension	94*23*11mm

门底导向件开孔图
Swing stopper Opening Hole

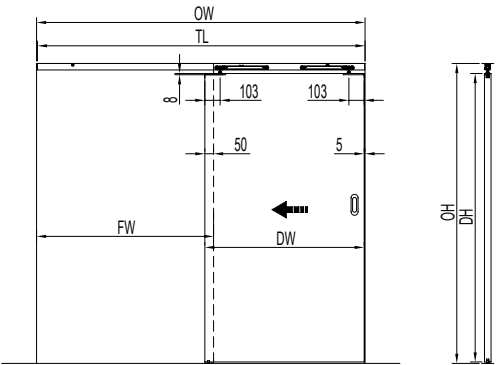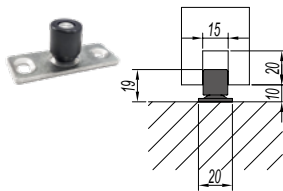

尺寸定义

Dimension definition	
门扇宽度Door leaf width	DW
门洞宽度Door opening width	OW
固定扇宽度Fixed leaf width	FW
门扇高度Door leaf height	DH
门洞高度Door opening height	OH
吊轨长度 Hanging rail length	TL

计算公式

Calculation formula
DH=OH-79 (开槽安装 Slotted installation)
DH=OH-87 (不开槽安装 Installation without slotting)
FW=OW/2+50
DW=FW-55
TL=OW-5

铝窄框推拉门配件系列

Aluminum narrow frame sliding door accessories series



铝窄框缓冲推拉门配件 T3G08HD 【80Kg】

Aluminum narrow frame Locating piece sliding door fittings



T3G08HD
吊轮组件 Hanging wheel

主要材质	锌合金+铝合金	Main Material	Zinc alloy + aluminum alloy
门重	≤80Kg	Heavy door	≤80Kg
门宽	≥570mm	The door wide	≥570mm
门高	≤2400mm	Door height	≤2400mm
缓冲形式	双向缓冲	Height adjustment	±3mm
高度调节	±3mm	Buffer form	Bidirectional buffer
适用门型	铝窄边框门	Apply the door type	Aluminum narrow bezel door




T3G93
吊轨 Hanging Rail



材 质	铝合金
表面处理	喷砂银白氧化
长度定制	Aluminum alloy
Surface Finish	Sand blasting silver white oxidation
Length customization	



T1L14
移门拉手 Door handle



主要材质	铝合金	Main Material	Aluminum alloy
表面处理	黑色	Surface Finish	black
适用门型	窄边框推拉门	Applicable Door	Narrow bezel sliding door

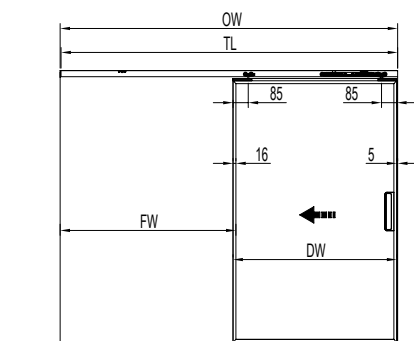


尺寸定义 Dimension definition

门扇宽度Door leaf width	DW
门洞宽度Door opening width	OW
固定扇宽度Fixed leaf width	FW
门扇高度Door leaf height	DH
门洞高度Door opening height	OH
吊轨长度Hanging rail length	TL

计算公式 Calculation formula

DH=OH-55
FW=OW/2+16
DW=FW-21
TL=OW-5

门底导向件开孔图 Swing stopper Opening Hole

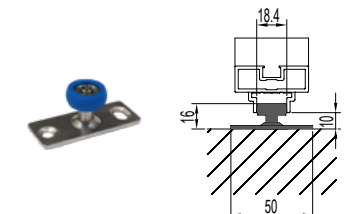

2 Floor Hinge Series

地弹簧类

- 通过QB/T 2697地弹簧标准检测
- 通过SGS瑞士通标环保检测
- 通过PONY货物运输条件鉴定机构检测
- Pass the floor hinge test of National standard GB/T 2697
- Pass SGS test of Switzerland
- Pass PONY test organization detection





D1H01 地弹簧 Floor Hinge




采用环保专用填充剂，可防水、防锈、保温、防虫
左开门、右开门均可使用，不区分左右门
可使门扇双向开启，单向开启须通过其它方式实现
适用于木门、金属门、玻璃门、有框门等门型

Originate the special filler ,anti-rust,water proof,keep warm,insect prevention
It can be used on both left and right side door
The single side open can be achieved by additional accessories
Suit for wooden door,glass door,metal door,frame door

- 定位形式:90°
- 门宽范围:600~950mm
- 最大承重:65Kg
- 最大开启角度:116°
- 使用寿命:>30万次
- 调速方式:一段调速
- 凸轮轴角度: 14°
- 盖板材质及厚度:
不锈钢304/1.2mm
- 适用温度: -15°C~40°C
- Location Style 90°
- Width :600~950mm
- Maximum Loading :65Kg
- Maximum Opening Angle :116°
- Life Cycle:>300,000Cycles
- Adjustment Style:One-speed Section
- Spindle14°
- Steel cover material/thickness:
SUS 304/1.2mm
- Suitable .Temperaturere -15°C~40°C

使用性能 Performance

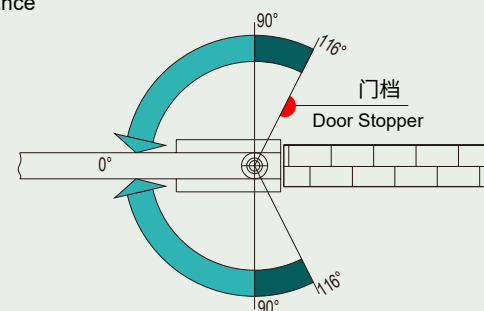

- 1速关闭 Speed-section1 closed
- 缓冲区 Buffer zone

0°为门扇关闭，90°为门扇定位
When it is 0°,the door leaf is closed;
when it is 90°,the door leaf is located



BJD10114 地弹簧 Floor Hinge




采用环保专用填充剂，可防水、防锈、保温、防虫
左开门、右开门均可使用，不区分左右门
可使门扇双向开启，单向开启须通过其它方式实现
适用于木门、金属门、玻璃门、有框门等门型

Originate the special filler ,anti-rust,water proof,keep warm,insect prevention
It can be used on both left and right side door
The single side open can be achieved by additional accessories
Suit for wooden door,glass door,metal door,frame door

- 定位形式:90°/118°
- 门宽范围:650~900mm
- 最大承重:85Kg
- 最大开启角度:125°
- 使用寿命:>50万次
- 调速方式:两段调速
- 凸轮轴角度: 14°
- 盖板材质及厚度:
不锈钢304/1.2mm
- 适用温度: -15°C~40°C
- Location Style 90°/118°
- Width :650~900mm
- Maximum Loading :85Kg
- Maximum Opening Angle :125°
- Life Cycle:>500,000Cycles
- Adjustment Style:Two-speed Section
- Spindle14°
- Steel cover material/thickness:
SUS 304/1.2mm
- Suitable .Temperaturere -15°C~40°C


使用性能 Performance

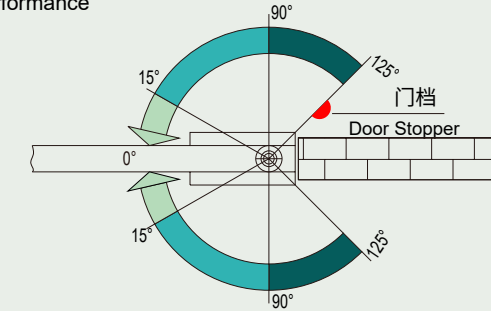


- 1速关闭 Speed-section1 closed
- 2速关闭 Speed-section2 closed
- 缓冲区 Buffer zone

- 0°为门扇关闭，90°为门扇定位
- 两段式速度关闭调节
90°~ 15°为关门阶段
15°~ 0°为闭锁阶段
- When it is 0°, the door leaf is closed;
when it is 90°, the door leaf is located
- Two-section adjustment of closing
90°~ 15° is closing section
15°~ 0° is locking section


功能调节 Unction to adjust

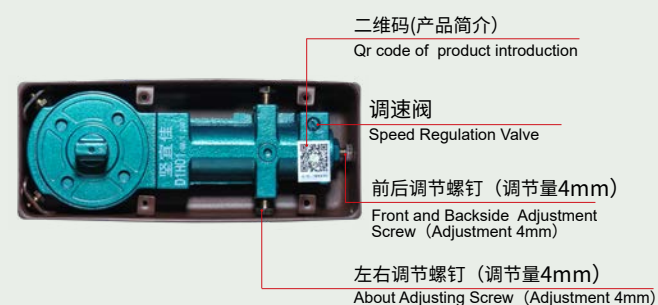


产品外形图 Three dimensional adjustment

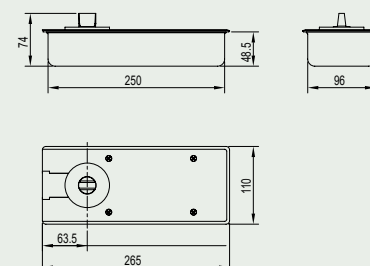

功能调节 Unction to adjust

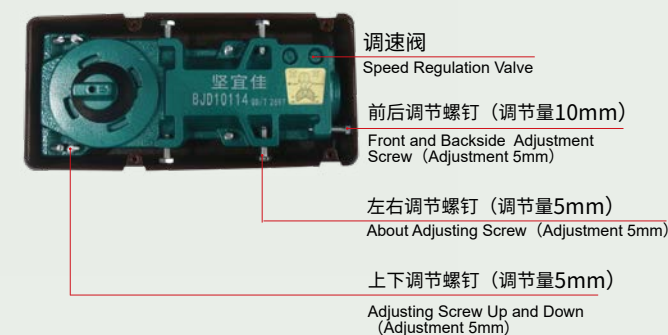

产品外形图 Three dimensional adjustment

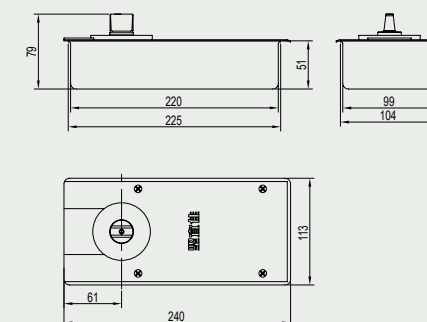



BJD10115
地弹簧 Floor Hinge




采用环保专用填充剂，可防水、防锈、保温、防虫
左开门、右开门均可使用，不区分左右门
可使门扇双向开启，单向开启须通过其它方式实现
适用于木门、金属门、玻璃门、有框门等门型


Originate the special filler ,anti-rust,water proof,keep warm,insect prevention
It can be used on both left and right side door
The single side open can be achieved by additional accessories
Suit for wooden door,glass door,metal door,frame door

- 定位形式:90°/118°
- 门宽范围:650~1050mm
- 最大承重:100Kg
- 最大开启角度:125°
- 使用寿命:>50万次
- 调速方式:两段调速
- 凸轮轴角度: 14°
- 盖板材质及厚度:
不锈钢304/1.2mm
- 适用温度: -15°C~40°C
- Location Style 90°/118°
- Width :650~1050mm
- Maximum Loading :100Kg
- Maximum Opening Angle :125°
- Life Cycle:>500,000Cycles
- Adjustment Style:Two-speed Section
- Spindle14°
- Steel cover material/thickness:
SUS 304/1.2mm
- Suitable .Temperaturre -15°C~40°C


使用性能 Performance

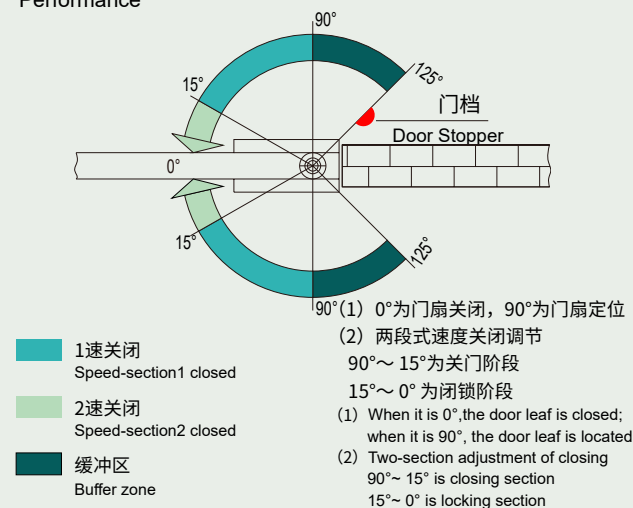

功能调节 Unction to adjust

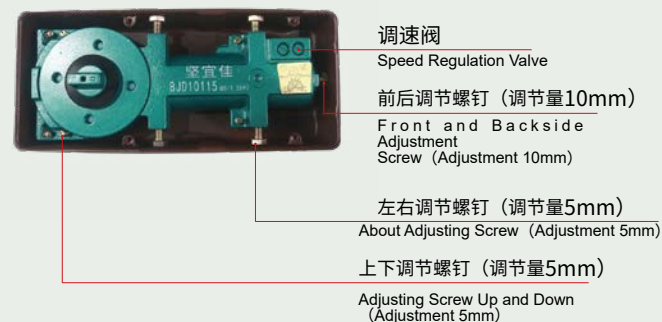

产品外形图 Three dimensional adjustment

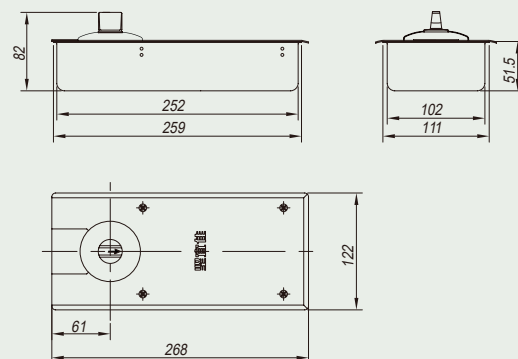

BJD20116
地弹簧 Floor Hinge




采用环保专用填充剂，可防水、防锈、保温、防虫
左开门、右开门均可使用，不区分左右门
可使门扇双向开启，单向开启须通过其它方式实现
适用于木门、金属门、玻璃门、有框门等门型


Originate the special filler ,anti-rust,water proof,keep warm,insect prevention
It can be used on both left and right side door
The single side open can be achieved by additional accessories
Suit for wooden door,glass door,metal door,frame door

- 定位形式:90°
- 门宽范围:800~1150mm
- 最大承重:130Kg
- 最大开启角度:116°
- 使用寿命:>50万次
- 调速方式:两段调速
- 凸轮轴角度: 14°
- 盖板材质及厚度:
不锈钢304/1.2mm
- 适用温度: -15°C~40°C
- Location Style 90°
- Width :800~1150mm
- Maximum Loading :130Kg
- Maximum Opening Angle :130°
- Life Cycle:>500,000Cycles
- Adjustment Style:Two-speed Section
- Spindle14°
- Steel cover material/thickness:
SUS 304/1.2mm
- Suitable .Temperaturre -15°C~40°C


使用性能 Performance

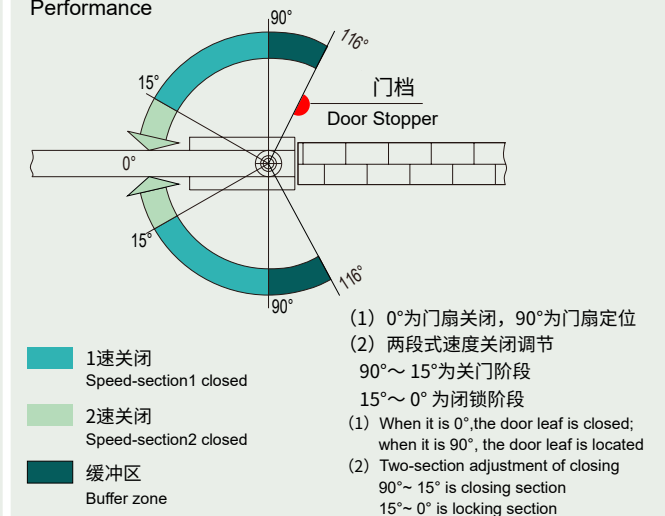

功能调节 Unction to adjust

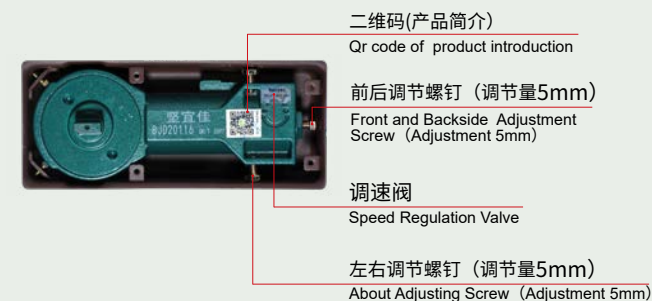

产品外形图 Three dimensional adjustment

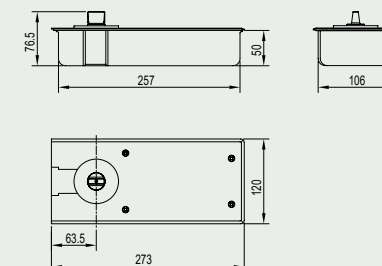



D3H03
地弹簧 Floor Hinge




采用环保专用填充剂，可防水、防锈、保温、防虫
左开门、右开门均可使用，不区分左右门
可使门扇双向开启，单向开启须通过其它方式实现
适用于木门、金属门、玻璃门、有框门等门型

Originate the special filler ,anti-rust,water proof,keep warm,insect prevention
It can be used on both left and right side door
The single side open can be achieved by additional accessories
Suit for wooden door,glass door,metal door,frame door

- 定位形式:90°
- 门宽范围:650~1000mm
- 最大承重:100Kg
- 最大开启角度:130°
- 使用寿命:>50万次
- 调速方式:两段调速
- 凸轮轴角度: 14°
- 盖板材质及厚度:
不锈钢304/1.2mm
- 适用温度: -15°C~40°C
- Location Style 90°
- Width :650~1000mm
- Maximum Loading :100Kg
- Maximum Opening Angle :130°
- Life Cycle:>500,000Cycles
- Adjustment Style:Two-speed Section
- Spindle14°
- Steel cover material/thickness:
SUS 304/1.2mm
- Suitable .Temperaturere -15°C~40°C

使用性能 Performance

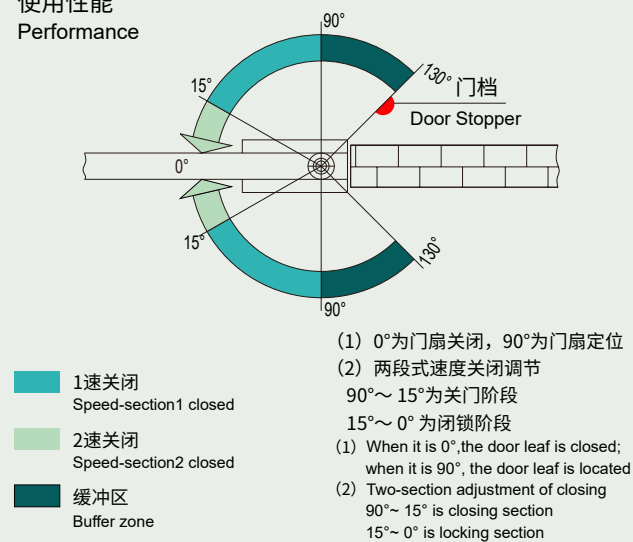

D3H04
地弹簧 Floor Hinge




采用环保专用填充剂，可防水、防锈、保温、防虫
左开门、右开门均可使用，不区分左右门
可使门扇双向开启，单向开启须通过其它方式实现
适用于木门、金属门、玻璃门、有框门等门型


Originate the special filler ,anti-rust,water proof,keep warm,insect prevention
It can be used on both left and right side door
The single side open can be achieved by additional accessories
Suit for wooden door,glass door,metal door,frame door

- 定位形式:90°
- 门宽范围:800~1150mm
- 最大承重:130Kg
- 最大开启角度:130°
- 使用寿命:>50万次
- 调速方式:两段调速
- 凸轮轴角度: 14°
- 盖板材质及厚度:
不锈钢304/1.2mm
- 适用温度: -15°C~40°C
- Location Style 90°
- Width :800~1150mm
- Maximum Loading :130Kg
- Maximum Opening Angle :130°
- Life Cycle:>500,000Cycles
- Adjustment Style:Two-speed Section
- Spindle14°
- Steel cover material/thickness:
SUS 304/1.2mm
- Suitable .Temperaturere -15°C~40°C


使用性能 Performance

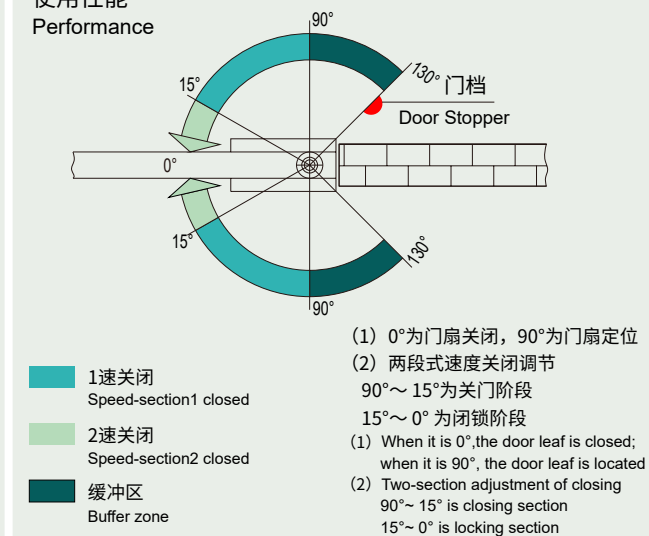


功能调节 Unction to adjust

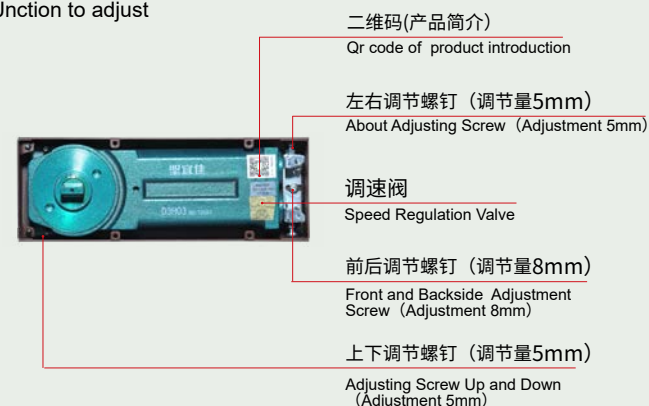


产品外形图 Three dimensional adjustment

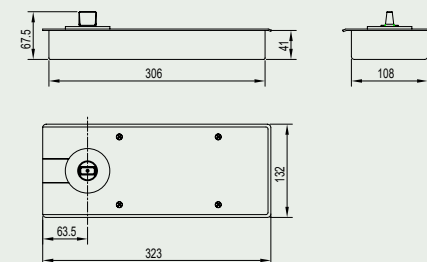

功能调节 Unction to adjust

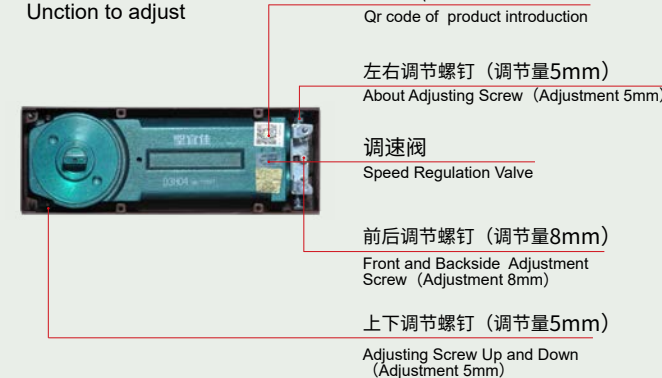

产品外形图 Three dimensional adjustment

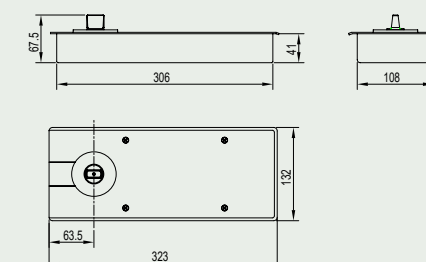



D3H05 地弹簧 Floor Hinge




采用环保专用填充剂，可防水、防锈、保温、防虫
左开门、右开门均可使用，不区分左右门
可使门扇双向开启，单向开启须通过其它方式实现
适用于木门、金属门、玻璃门、有框门等门型

Originate the special filler ,anti-rust,water proof,keep warm,insect prevention
It can be used on both left and right side door
The single side open can be achieved by additional accessories
Suit for wooden door,glass door,metal door,frame door

- 定位形式:90°
- 门宽范围:1100~1300mm
- 最大承重:150Kg
- 最大开启角度:130°
- 使用寿命:>50万次
- 调速方式:两段调速
- 凸轮轴角度: 14°
- 盖板材质及厚度:
不锈钢304/1.2mm
- 适用温度: -15°C~40°C
- Location Style 90°
- Width :1100~1300mm
- Maximum Loading :150Kg
- Maximum Opening Angle :130°
- Life Cycle:>500,000Cycles
- Adjustment Style:Two-speed Section
- Spindle14°
- Steel cover material/thickness:
SUS 304/1.2mm
- Suitable .Temperaturre -15°C~40°C

使用性能 Performance

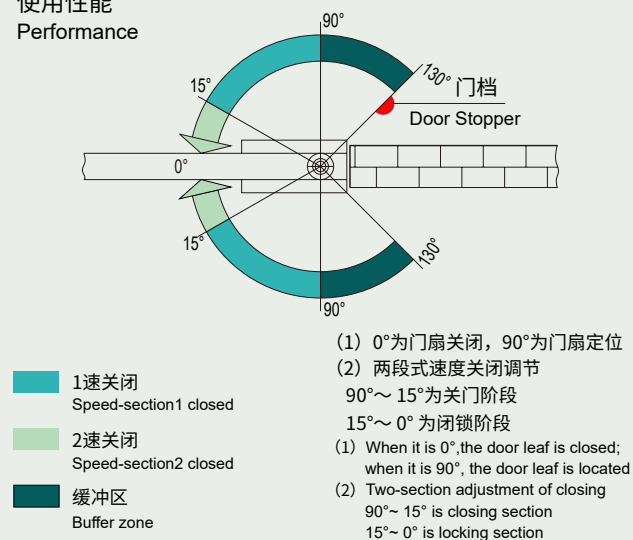

D3H06 地弹簧 Floor Hinge




采用环保专用填充剂，可防水、防锈、保温、防虫
左开门、右开门均可使用，不区分左右门
可使门扇双向开启，单向开启须通过其它方式实现
适用于木门、金属门、玻璃门、有框门等门型


Originate the special filler ,anti-rust,water proof,keep warm,insect prevention
It can be used on both left and right side door
The single side open can be achieved by additional accessories
Suit for wooden door,glass door,metal door,frame door

- 定位形式:90°
- 门宽范围:1200~1400mm
- 最大承重:200Kg
- 最大开启角度:130°
- 使用寿命:>50万次
- 调速方式:两段调速
- 凸轮轴角度: 14°
- 盖板材质及厚度:
不锈钢304/1.2mm
- 适用温度: -15°C~40°C
- Location Style 90°
- Width :1200~1400mm
- Maximum Loading :200Kg
- Maximum Opening Angle :130°
- Life Cycle:>500,000Cycles
- Adjustment Style:Two-speed Section
- Spindle14°
- Steel cover material/thickness:
SUS 304/1.2mm
- Suitable .Temperaturre -15°C~40°C


使用性能 Performance

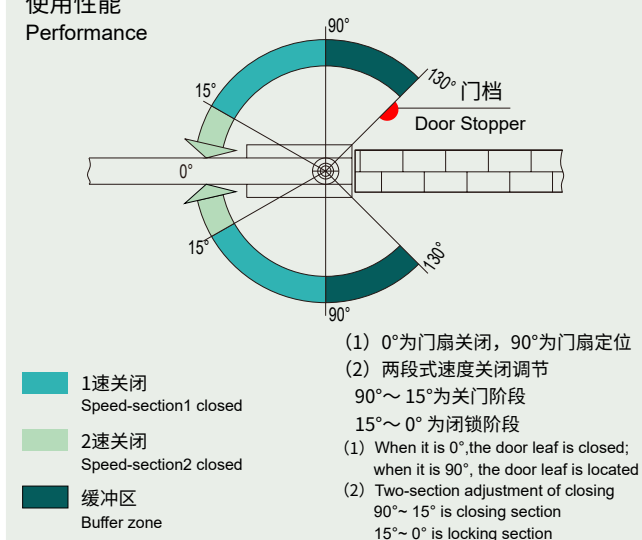


功能调节 Unction to adjust

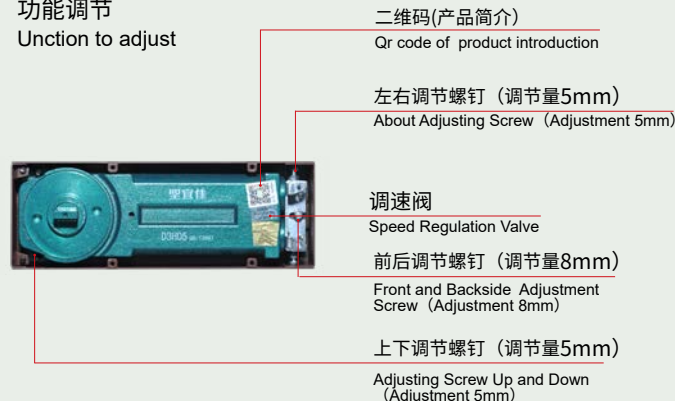


产品外形图 Three dimensional adjustment

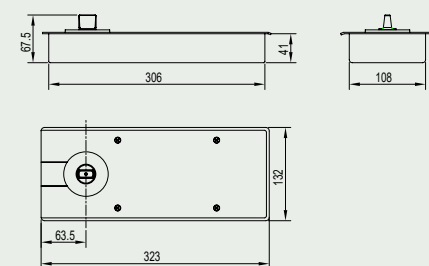

功能调节 Unction to adjust

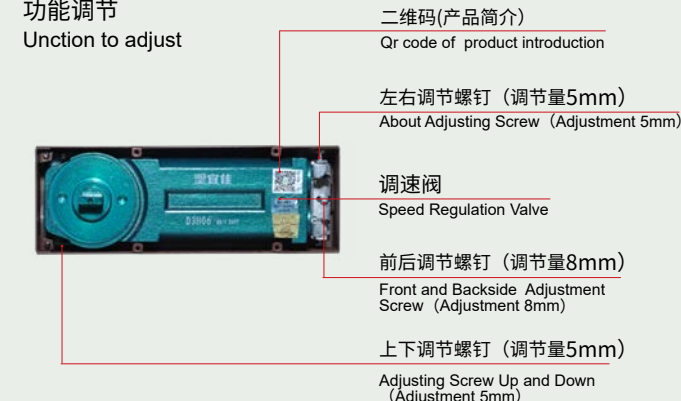

产品外形图 Three dimensional adjustment

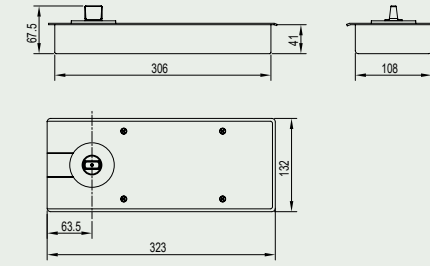



BJD50011
地彈簧 Floor Hinge


采用环保专用填充剂，可防水、防锈、保温、防虫
左开门、右开门均可使用，不区分左右门
可使门扇双向开启，单向开启须通过其它方式实现
适用于木门、金属门、玻璃门、有框门等门型

Originate the special filler ,anti-rust,water proof,keep warm,insect prevention
It can be used on both left and right side door
The single side open can be achieved by additional accessories
Suit for wooden door,glass door,metal door,frame door


- 定位形式:90°
 - 门宽范围:1200~1400mm
 - 最大承重:250Kg
 - 最大开启角度:120°
 - 使用寿命:>50万次
 - 调速方式:两段调速
 - 凸轮轴角度: 14°
 - 盖板材质及厚度:
不锈钢304/2.0mm
 - 适用温度:-15°C~40°C
- Location Style 90°
 - Width :1200~1400mm
 - Maximum Loading :200Kg
 - Maximum Opening Angle :120°
 - Life Cycle:>500,000Cycles
 - Adjustment Style:Two-speed Section
 - Spindle14°
 - Steel cover material/thickness:
SUS 304/2.0mm
 - Suitable .Temperaturere -15°C~40°C




使用性能
Performance

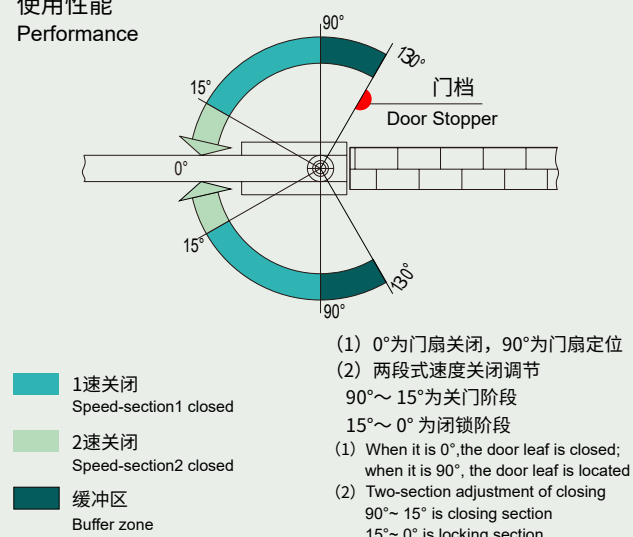

功能调节
Unction to adjust

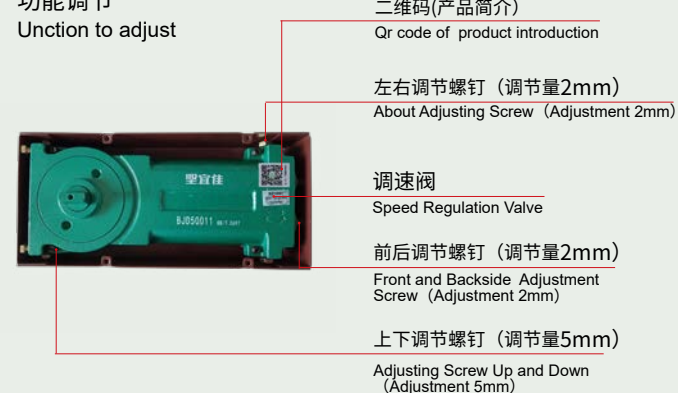


产品外形图
Three dimensional adjustment

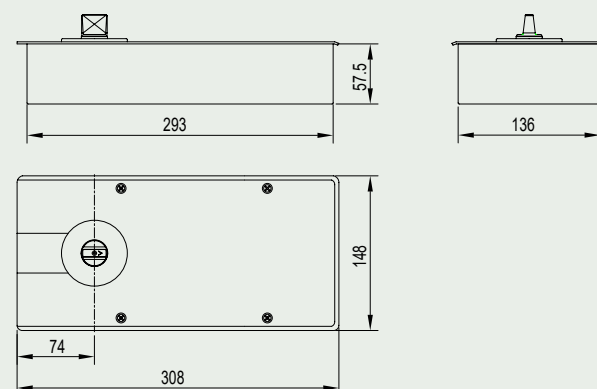

地彈簧配件
Accessories For Floor Hinge


SZ01

上枢轴座 Top Pivot Seat

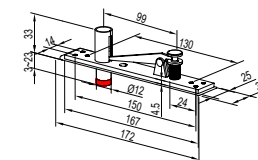


SD01

枢轴底座 Pivot Bottom Seat




BJDP2011

上枢轴座 Top Pivot Seat

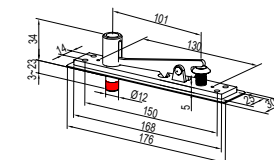


SD02

枢轴底座 Pivot Bottom Seat




BJDP3011

上枢轴座 Top Pivot Seat

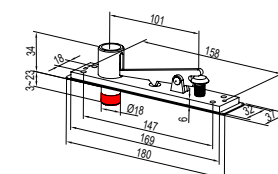


SD03

枢轴底座 Pivot Bottom Seat




SD03A

枢轴底座 Pivot Bottom Seat

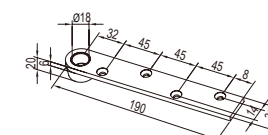


地弹簧配件
Accessories For Floor Hinge


ZY01
中心摇臂 Center Pivoted Arm

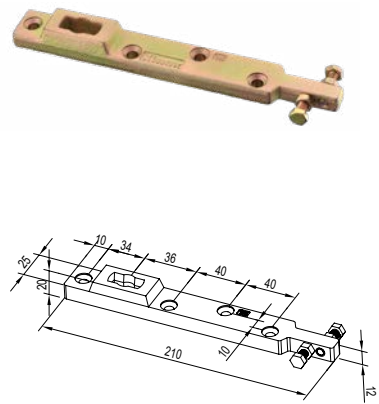

BJDP1103
中心摇臂 Center Pivoted Arm

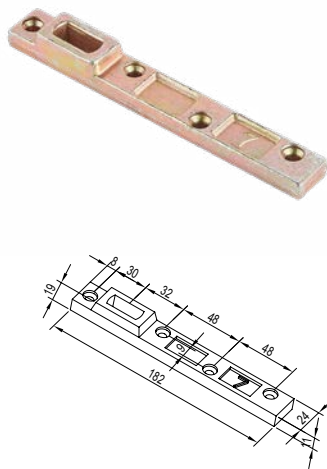


BJDP1303
中心摇臂 Center Pivoted Arm

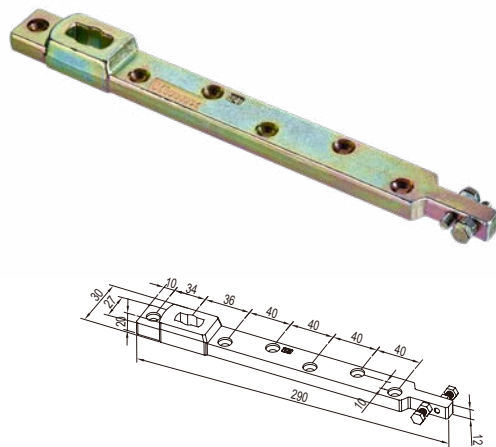


隔热型材专用配件
Special for insulation profile


BJDP7021
上枢轴座 Top Pivot Seat

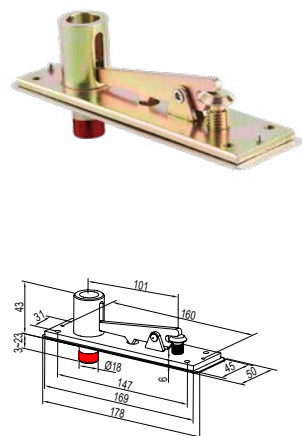

BJDP7012
枢轴底座 Pivot Bottom Seat

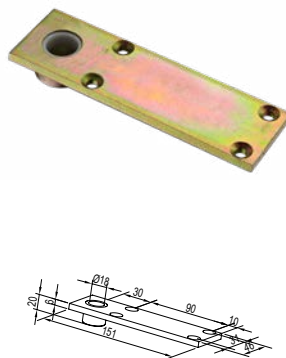


BJDP7013
中心摇臂 Center Pivoted Arm

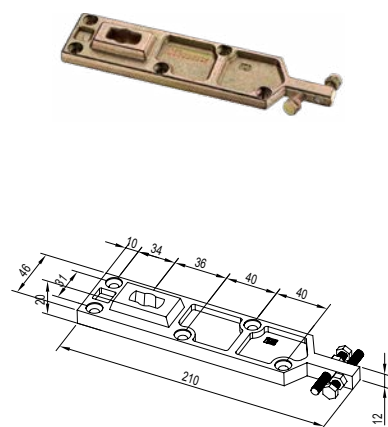

隔热型材专用配件
Special for insulation profile


BJDP7001
上枢轴座 Top Pivot Seat

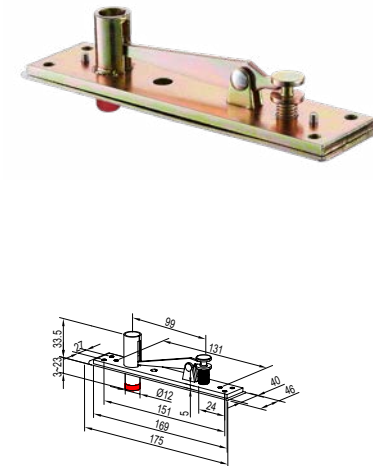

BJDP7002
枢轴底座 Pivot Bottom Seat




BJDP7003
中心摇臂 Center Pivoted Arm

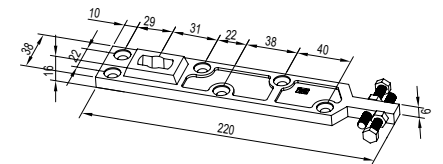


圆柱型材专用配件
Special for circular tube profile


BJDP2011
上枢轴座 Top Pivot Seat

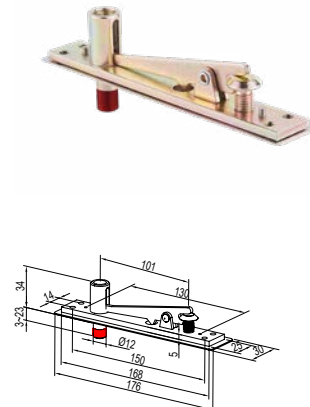

BJDP9002
枢轴底座 Pivot Bottom Seat

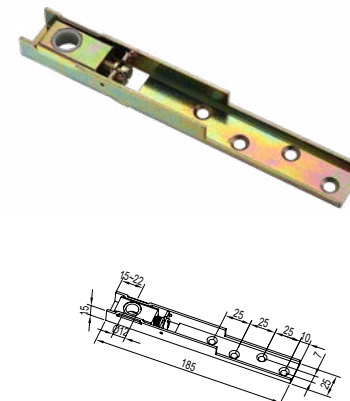

BJDP9003
中心摇臂 Center Pivoted Arm

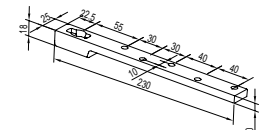

地弹簧标准配件配置对照表
Standard Accessories of Floor Hinge

序号 No.	地弹簧型号 Floor Hinge code	标准配件 Standard profile			隔热型材专用配件 Insulation profile		
		上枢轴座型号 Top Pivot Seat code	枢轴底座型号 Pivot Bottom Seat code	中心摇臂型号 Center Pivoted Arm code	上枢轴座型号 Top Pivot Seat code	枢轴底座型号 Pivot Bottom Seat code	中心摇臂型号 Center Pivoted Arm code
1	BJD10114	SZ01	SD01	BJDP1103	BJDP7021 BJDP7001	BJDP7012 BJDP7002	BJDP7013 BJDP7003
2	BJD10115						
3	D1H01						
4	D3H03						
5	BJD20116	BJDP2011	SD02	ZY01	BJDP7021 BJDP7001	BJDP7012 BJDP7002	BJDP7013 BJDP7003
6	D3H04						
7	D3H05						
8	D3H06	BJDP3011	SD03	BJDP1303	BJDP7021	BJDP7012	BJDP7013
9	BJD50011		SD03A				

注意事项


- 选用主要依据门宽、门重，并结合工程实际情况；选用不当会影响使用效果及产品寿命
- 玻璃门重（kg）= 面积(m²)×门厚(mm)×2.56（密度）
- 整扇门重（kg）= 玻璃门重量+所有配件重量

Notes:


- Floor hinge type selection: according to width, weight of door and the actual condition of each project. Improper match will affect its effect and the life span
- Weight of glass door: weight(kg)= area(m²) ×thickness(mm) ×2.56(density)
- The weight of the whole door(kg) = weight of the glass door + weight of all the accessories

玻璃门重一览表 Glass Door weight					
常用单玻厚度 Single Glass panel thickness	8mm	10mm	12mm	15mm	19mm
每平方米重量 Weight Per Square Meter	20.5Kg	25.6Kg	30.7Kg	38.4Kg	48.6Kg

无框门安装示意图
Frameless Door Installation

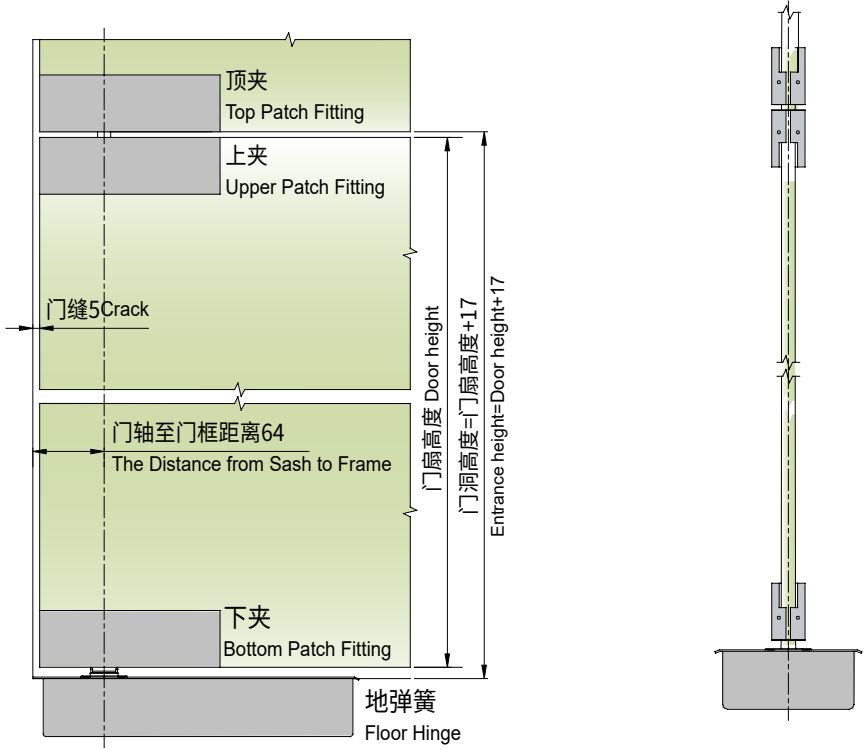

有框门安装示意图
Frame Door Installation

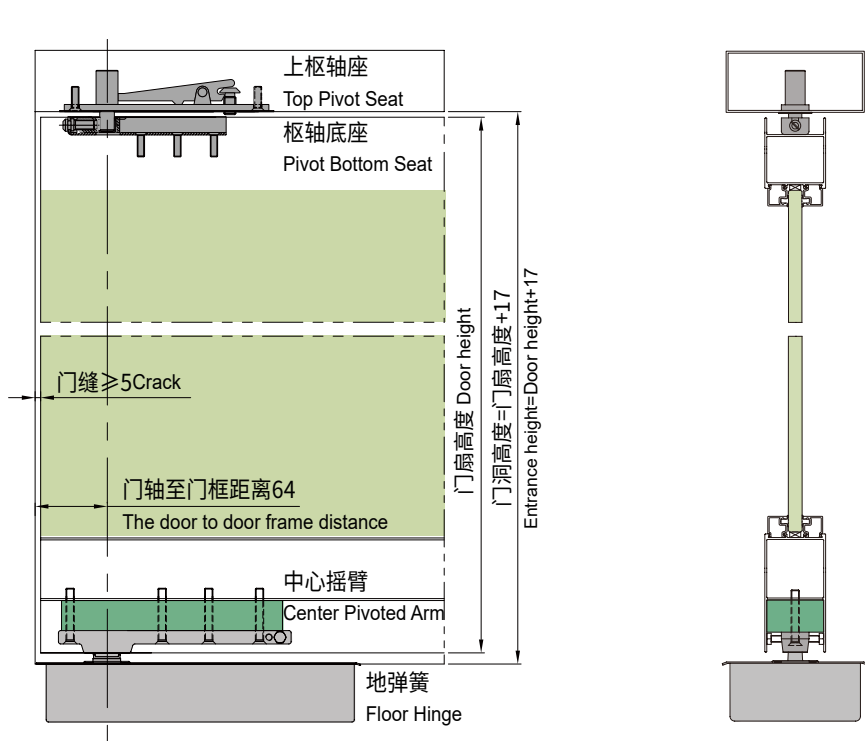

3 Door Closer Series

闭门器类

●通过JG/T 268建筑用闭门器标准检测

●Pass building door closers test of National standard JG/T 268






B1H01/B1H02/B1H03

暗装式闭门器系列 Concealed Door Closer



- 主体采用高强度铝合金，传动构件采用优质钢材
- 安装灵活不区分左右，单向开启，适用于有框门、木门等门型
- 标准颜色为砂纹银
- High-strength aluminum alloy for main body, high-quality steel for gearing parts
- Flexible installation and no need to distinguish left and right, for single-open, suit for door with frame, wooden door etc
- Standard Color: Sand sycee

使用性能 Usage Performance

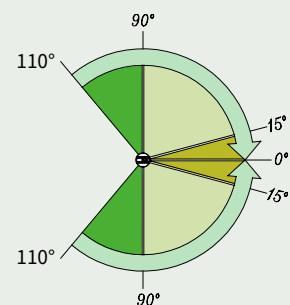


- 1速关闭
Speed-section1 closed
- 2速关闭
Speed-section2 closed
- 缓冲区
Buffer

两段式关闭速度调节
90°~15°为关门阶段
15°~0°为闭锁阶段
Two-section adjustable closing speeds
During 90°~15°is closing section
During 15°~0°is locking section

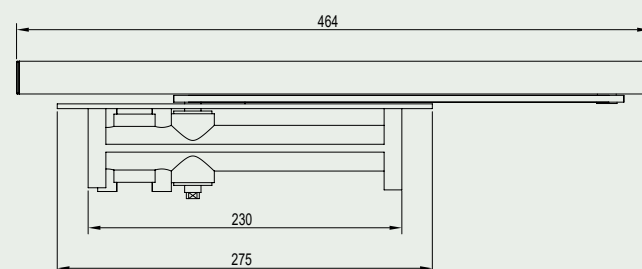

门扇厚度要求
Door sash thickness required

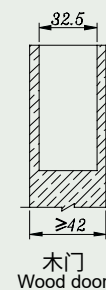

木门
Wood door

型号 Code	定位形式 Location Style	门宽范围 Width	最大承重 Maximum Loading	使用寿命 Life Cycle	适用温度 Suitable .Temperaturere
B1H01	任意位置可定位，定位可撤消 Hold at anywhere ,Hold can be withdrawn	650~850mm	45Kg	>50万次 >500,000 Cycles	-20°C~50°C
B1H02		850~1050mm	65Kg		
B1H03		1000~1200mm	85Kg		




B1C01

明装式闭门器系列 Exposed Door Closer Series

- 主体采用高强度铝合金，传动构件采用优质钢材
- 安装灵活不区分左右，单向开启，适用于有框门、木门等门型
- 疏散门必须采用无驻持功能的闭门器
- 标准颜色为砂纹银
- High-strength aluminum alloy for main body, high-quality steel for gearing parts
- Flexible installation and no need to distinguish left and right, for single-open, suit for door with frame, wooden door etc
- Evacuation door must adopt the door closer without the hold function.
- Standard Color: Sand sycee



使用性能 Usage Performance

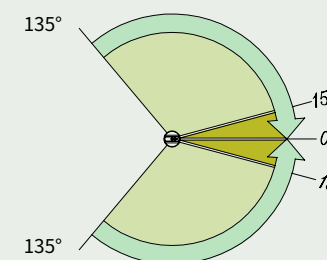

- 1速关闭
Speed-section1 closed
- 2速关闭
Speed-section2 closed

(1) 两段式关闭速度调节
90°~15°为关门阶段
15°~0°为闭锁阶段
(2) 适用于金属门、木门等门型

(1)Two-section adjustable closing speeds
During 90°~15°is closing section
During15°~0°is locking section
(2)Suit for many kinds of doors,
such as metal door,wooden door

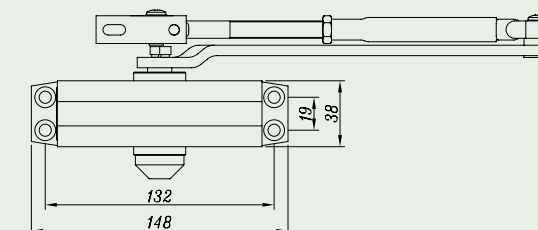

型号 Code	定位形式 Location Style	门宽范围 Width	最大承重 Maximum Loading	使用寿命 Life Cycle	适用温度 Suitable .Temperaturere
B1C01	无驻持 Non-hold	650~850mm	45Kg	>30万次 >300,000 Cycles	-20°C~50°C



B1C04

明装式闭门器系列 Exposed Door Closer Series

- 主体采用高强度铝合金，传动构件采用优质钢材
- 安装灵活不区分左右，单向开启，适用于有框门、木门等门型
- 疏散门必须采用无驻持功能的闭门器
- 标准颜色为砂纹银
- High-strength aluminum alloy for main body, high-quality steel for gearing parts
- Flexible installation and no need to distinguish left and right, for single-open, suit for door with frame, wooden door etc
- Evacuation door must adopt the door closer without the hold function
- Standard Color: Sand sycee




B2C01/B2C02/B3C03

明装式闭门器系列 Exposed Door Closer Series


- 主体采用高强度铝合金，传动构件采用优质钢材
- 安装灵活不区分左右，单向开启，适用于有框门、木门等门型
- 疏散门必须采用无驻持功能的闭门器
- 标准颜色为砂纹银
- High-strength aluminum alloy for main body, high-quality steel for gearing parts
- Flexible installation and no need to distinguish left and right, for single-open, suit for door with frame, wooden door etc
- Evacuation door must adopt the door closer without the hold function.
- Standard Color: Sand sycee

使用性能 Usage Performance



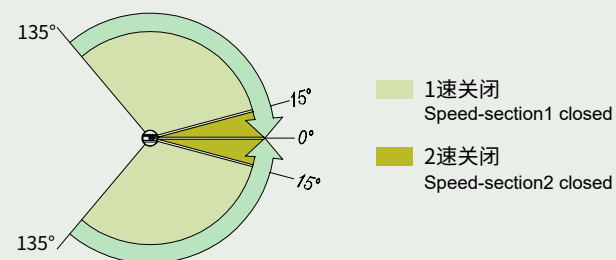


- (1) 两段式关闭速度调节
90°~15°为关门阶段
15°~0°为闭锁阶段
- (2) 适用于金属门、木门等门型
- (1)Two-section adjustable closing speeds
During 90°~15°is closing section
During15°~0°is locking section
- (2)Suit for many kinds of doors,
such as metal door,wooden door

使用性能 Usage Performance

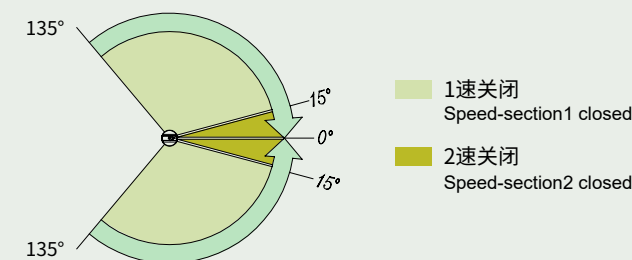

- (1) 两段式关闭速度调节
90°~15°为关门阶段
15°~0°为闭锁阶段
- (2) 适用于金属门、木门等门型
- (1)Two-section adjustable closing speeds
During 90°~15°is closing section
During15°~0°is locking section
- (2)Suit for many kinds of doors,
such as metal door,wooden door

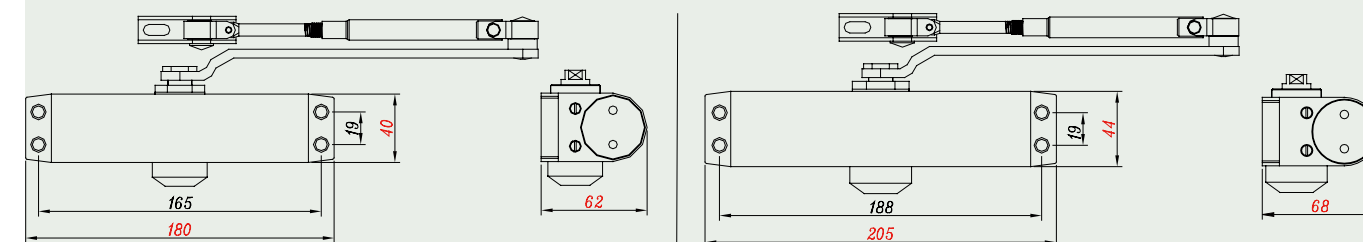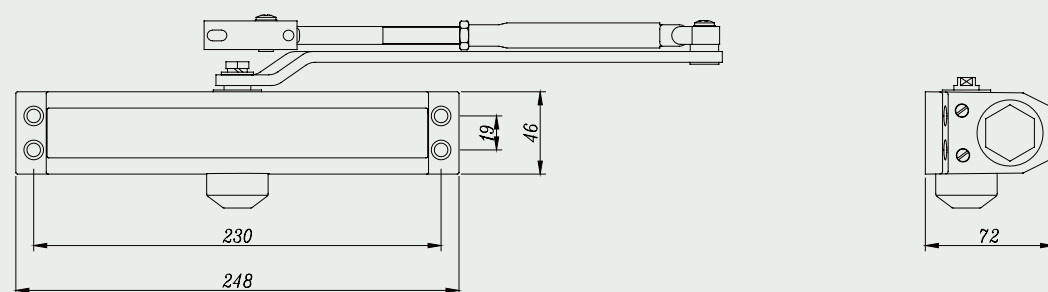

B2C01/B2C02

B3C03

型号 Code	定位形式 Location Style	门宽范围 Width	最大承重 Maximum Loading	使用寿命 Life Cycle	适用温度 Suitable .Temperaturere
B1C04	无驻持 Non-hold	1150~1400mm	120Kg	>50万次 >500,000 Cycles	-20°C~50°C

型号 Code	定位形式 Location Style	门宽范围 Width	最大承重 Maximum Loading	使用寿命 Life Cycle	适用温度 Suitable .Temperaturere
B2C01	无驻持 Non-hold	650~850mm	45Kg	>50万次 >500,000 Cycles	-20°C~50°C
B2C02		850~1050mm	65Kg		
B3C03		1000~1200mm	85Kg		




B4C01/B4C02

明装式闭门器系列 Exposed Door Closer Series


- 主体采用高强度铝合金，传动构件采用优质钢材
- 安装灵活不区分左右，单向开启，适用于有框门、木门等门型
- 疏散门必须采用无驻持功能的闭门器
- 标准颜色为砂纹银
- High-strength aluminum alloy for main body, high-quality steel for gearing parts
- Flexible installation and no need to distinguish left and right, for single-open, suit for door with frame, wooden door etc
- Evacuation door must adopt the door closer without the hold function
- Standard Color: Sand sycee

使用性能 Usage Performance

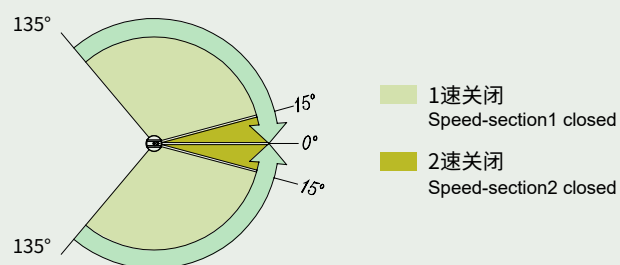

- (1) 两段式关闭速度调节
90°~15°为关门阶段
15°~0°为闭锁阶段
- (2) 适用于金属门、木门等门型

- (1)Two-section adjustable closing speeds
During 90°~15°is closing section
During15°~0°is locking section
- (2)Suit for many kinds of doors,
such as metal door,wooden door

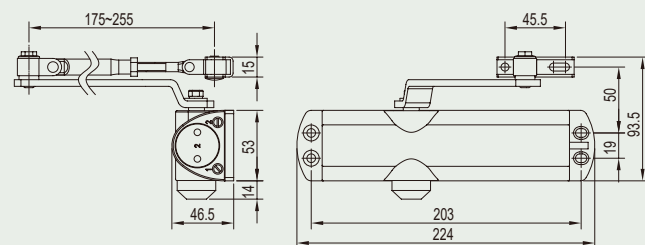

型号 Code	定位形式 Location Style	门宽范围 Width	最大承重 Maximum Loading	使用寿命 Life Cycle	适用温度 Suitable .Temperaturere
B4C01	无驻持 Non-hold	650~850mm	45Kg	>50万次 >500,000 Cycles	-20°C~50°C
B4C02		850~1050mm	65Kg		




B2S01/B2S02/B3S03


明装式闭门器系列 Exposed Door Closer Series

- 主体采用高强度铝合金，传动构件采用优质钢材
- 安装灵活不区分左右，单向开启，适用于有框门、木门等门型
- 疏散门必须采用无驻持功能的闭门器
- 标准颜色为砂纹银
- High-strength aluminum alloy for main body, high-quality steel for gearing parts
- Flexible installation and no need to distinguish left and right, for single-open, suit for door with frame, wooden door etc
- Evacuation door must adopt the door closer without the hold function
- Standard Color: Sand sycee


使用性能 Usage Performance

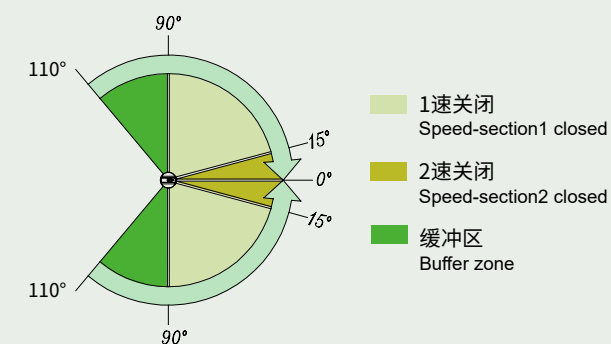

- 两段式关闭速度调节
90°~15°为关门阶段
15°~0°为闭锁阶段
- Two-section adjustable closing speeds
During 90°~15°is closing section
During15°~0°is locking section

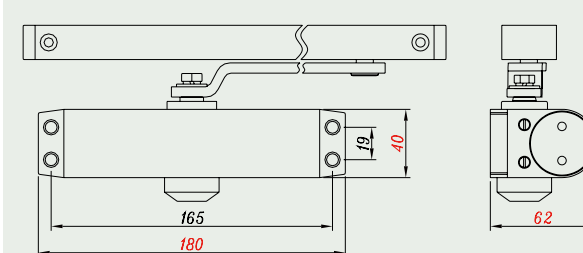

B2S01/B2S02

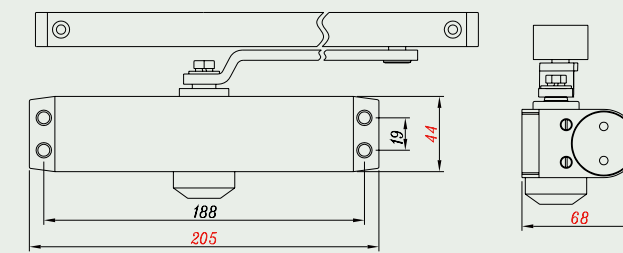

B3S03

型号 Code	定位形式 Location Style	门宽范围 Width	最大承重 Maximum Loading	使用寿命 Life Cycle	适用温度 Suitable .Temperaturere
B2S01	任意位置可定位，定位可撤消 Hold at anywhere ,Hold can be withdrawn	650~850mm	45Kg	>50万次 >500,000 Cycles	-20°C~50°C
B2S02		850~1050mm	65Kg		
B3S03		1000~1200mm	85Kg		




B4S01/B4S02


明装式闭门器系列
Exposed Door Closer Series

- 主体采用高强度铝合金，传动构件采用优质钢材
- 安装灵活不区分左右，单向开启，适用于有框门、木门等门型
- 疏散门必须采用无驻持功能的闭门器
- 标准颜色为砂纹银
- High-strength aluminum alloy for main body, high-quality steel for gearing parts
- Flexible installation and no need to distinguish left and right, for single-open, suit for door with frame, wooden door etc
- Evacuation door must adopt the door closer without the hold function
- Standard Color: Sand sycee

使用性能
Usage Performance

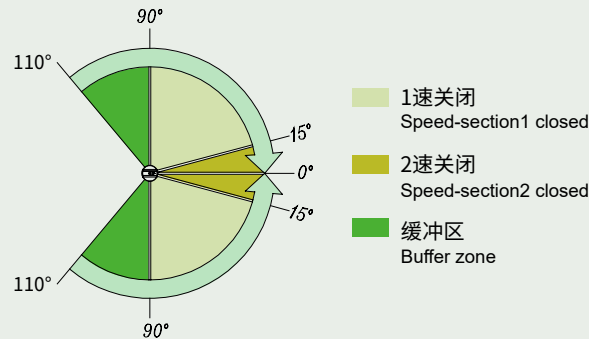

两段式关闭速度调节
90°~ 15°为关门阶段
15°~ 0° 为闭锁阶段
Two-section adjustable closing speeds
During 90°~15°is closing section
During15°~0°is locking section

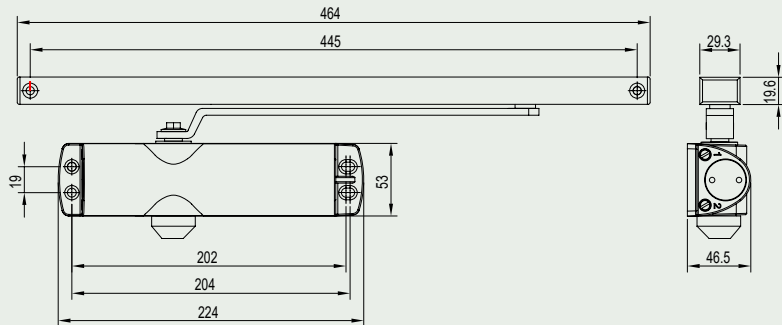

型号 Code	定位形式 Location Style	门宽范围 Width	最大承重 Maximum Loading	使用寿命 Life Cycle	适用温度 Suitable .Temperaturre
B4S01	任意位置可定位，定位可撤消 Hold at anywhere ,Hold can be withdrawn	650~850mm	45Kg	>50万次 >500,000 Cycles	-20℃~50℃
B4S02		850~1050mm	65Kg		

安装示意图
Installation

安装方式 Installation	标准安装 Standard mounting	倒悬安装 Overturn mounting	平行安装 Parallel Fix
摇臂式 Pivot Arm			
滑轨式 Sliding			
隐藏式 Concealed			--

4 Patch Fitting

门夹系列

- 内芯采用高强度压铸铝合金及优质碳素钢材质，装饰盖采用304不锈钢
- 表面处理可选镜光或亚光
- Inner Core Part with High strength die-casting alloy and quality carbon steel material , decorative cover adopts 304 stainless steel
- Surface Finish : Satin or Mirror



门夹系列100Kg

Patch Series

技术参数


Technical Parameters

适用最大门重Maximum Bearing	100Kg
适用门扇厚度Glass Thickness	10-12mm
适用门扇宽度Door leaf width dimension	≤1000mm
适用门扇高度Door leaf height dimension	≤2600mm
M1D1系列装饰盖采用扣装式固定，M1D0系列装饰盖采用内六角螺钉固定	
M1D1The decorative cover is buckle-mounted, M1D0The decorative cover is fixed by inner hexagon screws	

主要材质及表面处理



Main Material and Surface Finish

主要材质：主体高强度压铸铝合金及优质碳素钢
装饰盖304不锈钢
表面处理：亚光或镜光
Main Material: Main body-- High strength die-casting aluminum alloy and high-quality carbon steel
Decorative cover--SS304
Surface Finish: Satin / Mirror

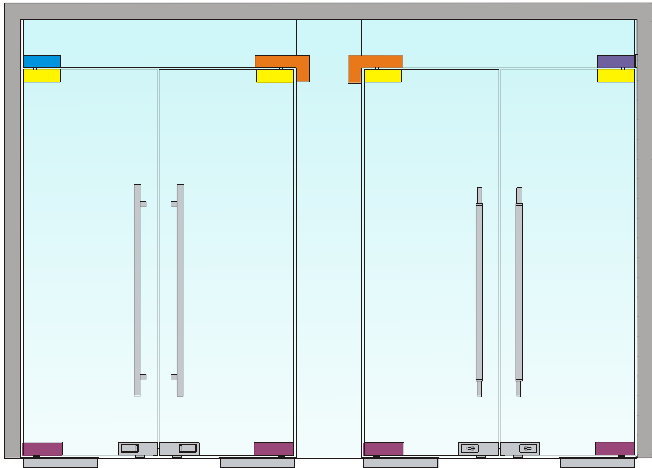



M1D11

下夹 Bottom Patch Fitting





M1D12

上夹 Upper Patch Fitting





M1D13

顶夹 Top Patch Fittingg





M1D01

下夹 Bottom Patch Fitting

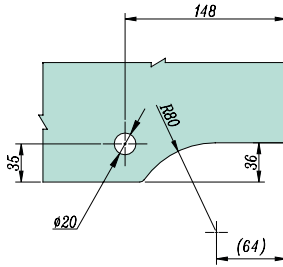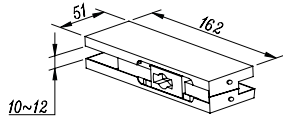



M1D02

上夹 Upper Patch Fitting

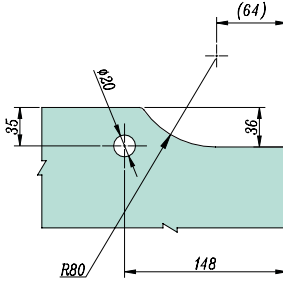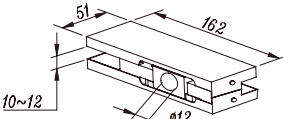



M1D03

顶夹 Top Patch Fitting

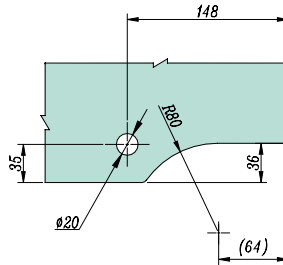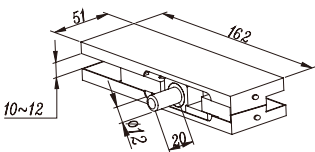

M1D04

曲夹 Bending Patch Fitting

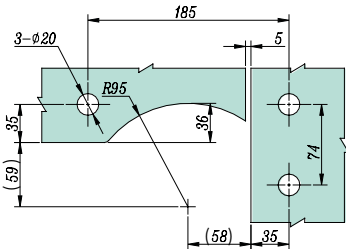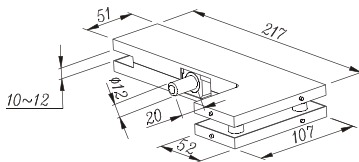

5

Glass Door Lock ,Latch series



玻璃门锁、插销系列

- 装饰盖采用304不锈钢
- 安装方便，性能优越，安全可靠
- Decorative cover is made of SS304
- Simple installation and steady performance



S1K01

锁夹 Locker



- 无框玻璃平开门专用，适用玻璃厚度10~15mm
- 室内及室外可以使用钥匙锁闭、开启
- 适用于玻璃单开门或双开门，对于安装中间门锁的双开门，必须安装玻璃门插销
- Special for frameless glass side hung door ,Available glass thickness is 10~15mm
- Indoor and outdoor can use key to lock and open
- Suit for single-open or double-open glass door, and it must adopt the latch if it is the double glass door with middle lock


S2K02

玻璃门锁 Glass Door Lock



S2K03

玻璃门锁 Glass Door Lock




S3K02

玻璃门锁 Glass Door Lock



S3K03


玻璃门锁 Glass Door Lock



- 无框玻璃平开门专用，适用玻璃厚度10~12mm
- 玻璃无需开孔
- S2K02、S2K03室内使用旋钮锁闭、开启，室外使用钥匙锁闭、开启
- S3K02、S3K03室内无法开启，室外使用钥匙锁闭、开启
- 适用于玻璃单开门或双开门，对于安装中间门锁的双开门，必须安装玻璃门插销
- Special for frameless glass side hunge door ,Available glass thickness is 10~12mm
- Without glass drilling
- For S2K02,S2K03,lock and unlock indoor with knob,Lock and unlock outdoor with key
- For S3K02,S3K03,Indoor cannot open and unlock outdoor with key
- Suit for single-open or double-open glass door, and it must adopt the latch if it is the double glass door with middle lock

S3K04


玻璃移门锁 Glass Door Lock

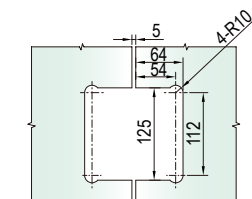

副锁 主锁
Subsidiary Lock Main Body

S3K05

玻璃移门锁 Glass Door Lock





- 无框玻璃平移门专用
- 适用玻璃厚度10~12mm
- 室内及室外均使用钥匙锁闭、开启

- Special for frameless glass side hung door
- Available glass thickness is 10~12mm
- Indoor and outdoor can use key to loc k and open

C1B01

玻璃门插销 Glass Door Latch

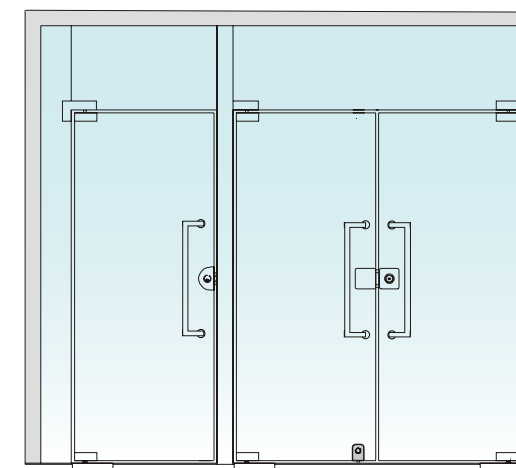

- 无框玻璃平开门专用，适用玻璃厚度10~12mm
- 玻璃无需开孔
- Special for frameless glass side hunge door,Available glass thickness is 10~12mm
- Glass without drilling


6

Accessories for
Profiles Door series
型材门配件类






Z1P02

偏心门轴 Eccentric Door Spindle

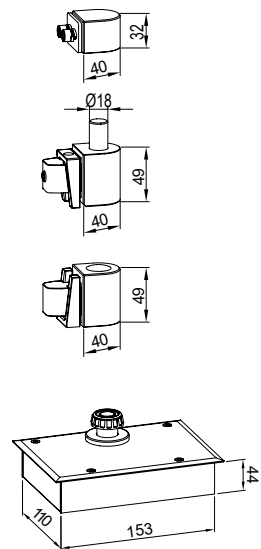

安装示意图 Installation

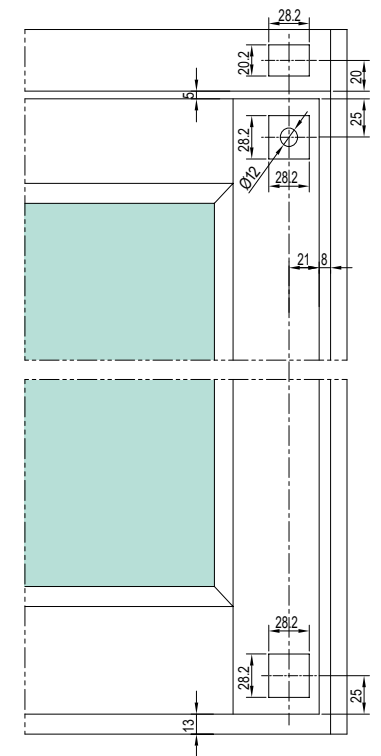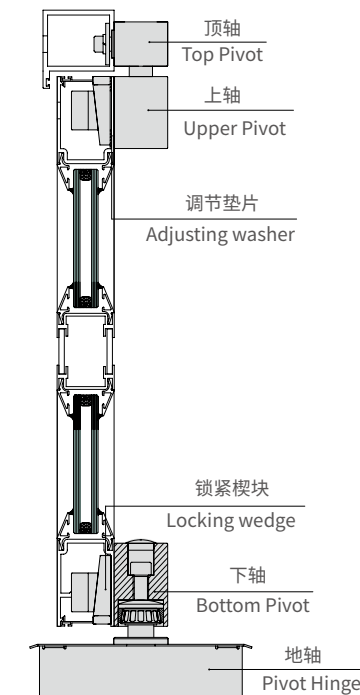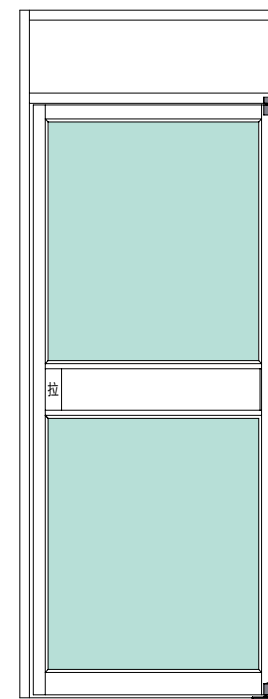

- 推荐承重80Kg
- 主要材质：门轴铝合金、地轴主体铸铝，盖板304不锈钢
- 表面处理：银灰色
- 下轴、上轴可垂直调整±5mm
- 内部采用滚针轴承设计，保证门扇运转的灵活性与可靠性，且保证了环保地轴的使用寿命
- 与门轴配合使用，无定位功能，门档自行采购

- Maximum loading is 80 kg
- Main material: door shaft aluminum alloy, earth shaft body cast aluminum, cover plate SS304
- Surface finish: silver gray
- The bottom pivot、Upper Pivot can be adjusted by ±5mm
- The inside needle roller shaft makes the door operation flexible & reliable and guarantee the life span of Floor hinge
- Use with door shaft, no positioning function, door stop purchased separately

注意事项:

- (1) 适用型材壁厚为2.5~3mm
- (2) 当型材壁厚小于2.5mm,安装时需加装调整垫片
- (3) 当型材壁厚大于3mm时,不能用力敲击锁紧楔块,以免损坏上下轴需将锁紧楔块凸出门框部分磨平


Notes:

- (1) Applicable profiles wall thickness of 2.5-3mm
- (2) When profiles wall thickness is less than 2.5 mm,you should add adjustment washers
- (3) When profiles wall thickness is more than 3mm,please do not hit the locking wedge by force , in case of the upper/bottom pivot broken , and please rubdown the locking wedge part that out of the frame






Z1P03

偏心门轴 Eccentric Door Spindle

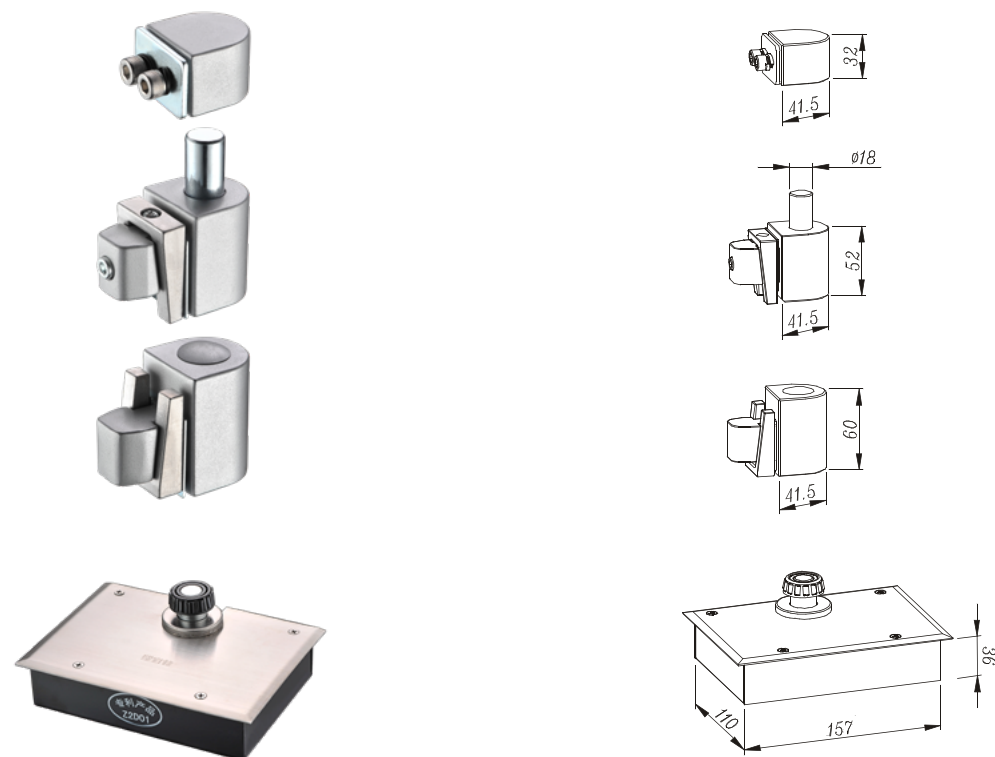

安装示意图 Installation

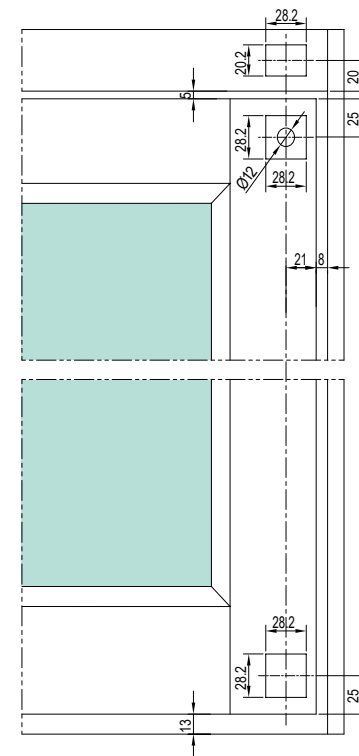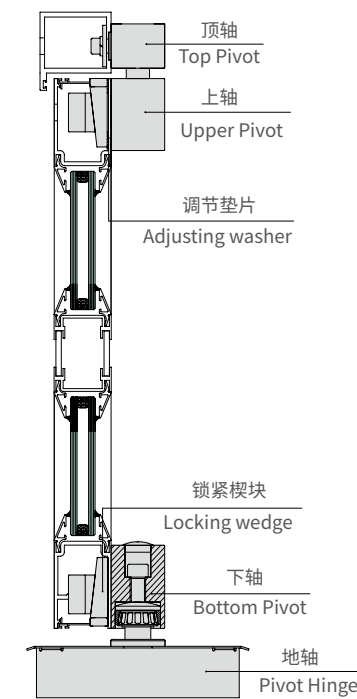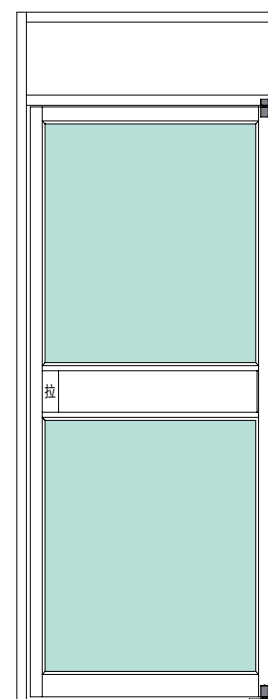

- 推荐承重100Kg
- 主要材质：门轴铝合金、地轴主体铸铁，盖板304不锈钢
- 表面处理：银灰色
- 下轴可垂直调整±5mm
- 具有全方位调节功能，与门轴配合使用
- 内部采用滚针轴承设计，保证门扇运转的灵活性与可靠性，且保证了环保地轴的使用寿命
- 地轴采用环保专用填充剂，可防水、防锈、保温、防虫
- 与门轴配合使用，无定位功能，门档自行采购

- Maximum loading is 100 kg
- Main material: door shaft aluminum alloy, Earth shaft main cast iron, cover plate SS304
- Surface finish: silver gray
- The bottom pivot can be adjusted by ±5mm
- It can be adjusted from three dimension, work with door pivot
- The inside needle roller shaft makes the door operation flexible & reliable and guarantee the life span of Floor hinge
- Originate the special filler, anti-rust, water proof, keep warm, insect prevention
- Use with door shaft, no positioning function, door stop purchased separately


注意事项:

- (1) 适用型材壁厚为2.5~3mm
- (2) 当型材壁厚小于2.5mm, 安装时需加装调整垫片
- (3) 当型材壁厚大于3mm时, 不能用力敲击锁紧楔块, 以免损坏上下轴, 需将锁紧楔块凸出门框部分磨平

Notes:


- (1) Applicable profiles wall thickness of 2.5-3mm
- (2) When profiles wall thickness is less than 2.5 mm, you should add adjustment washers
- (3) When profiles wall thickness is more than 3mm, please do not hit the locking wedge by force, in case of the upper/bottom pivot broken, and please rub down the locking wedge part that out of the frame



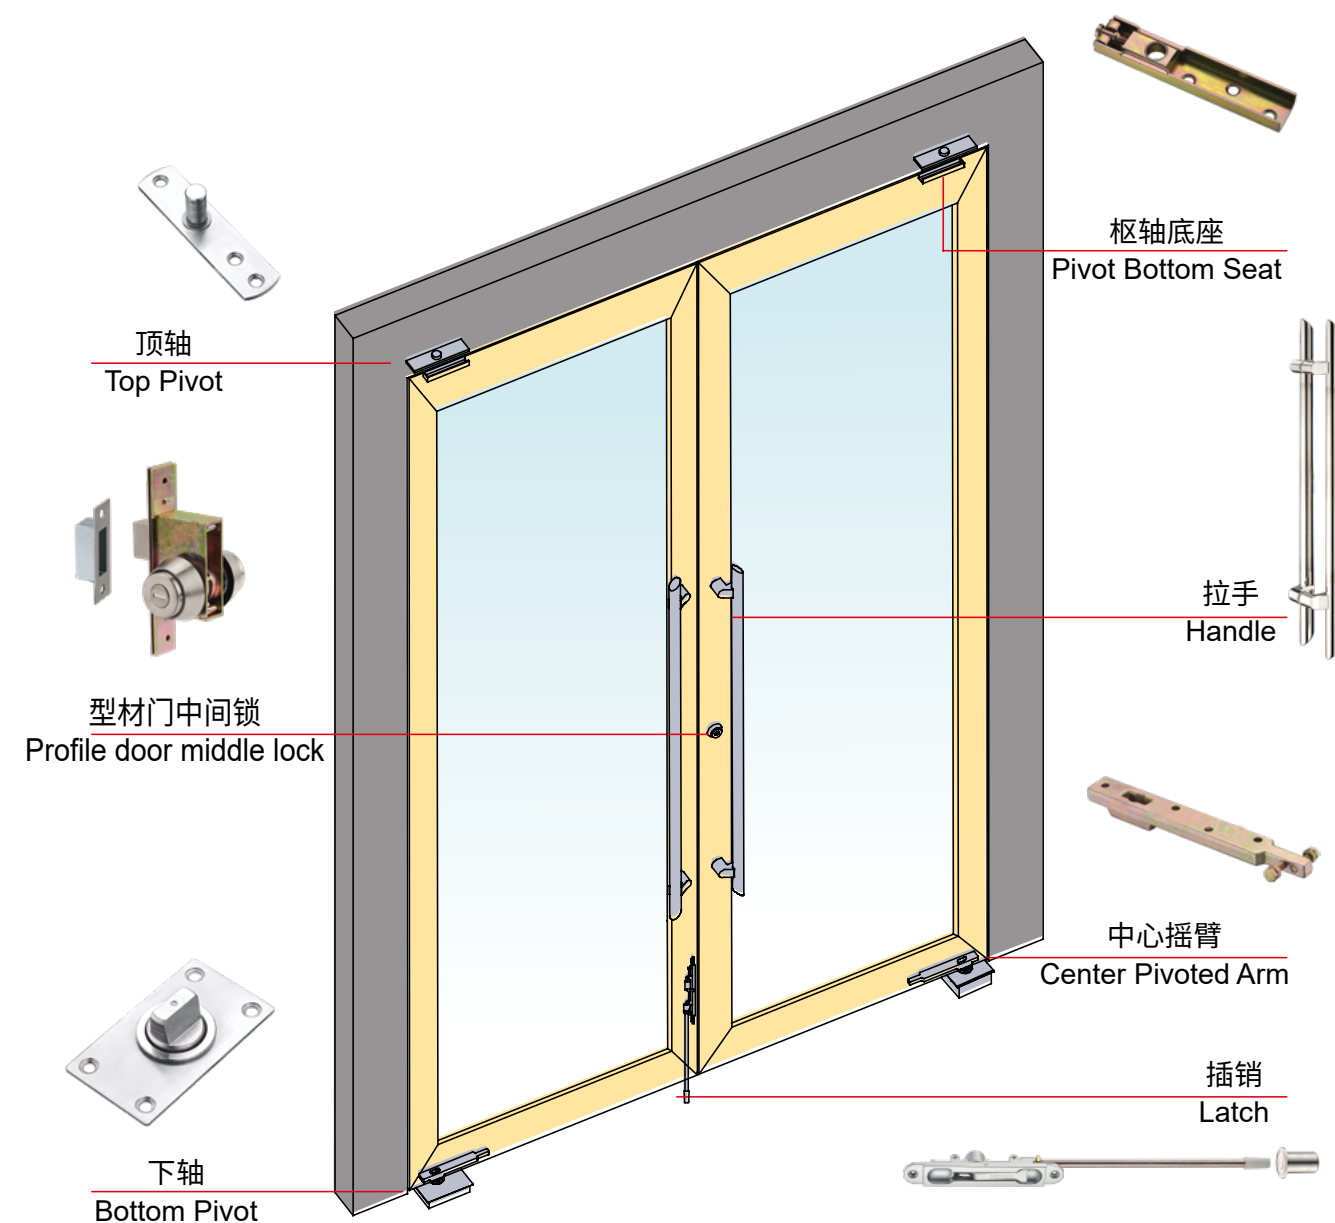


地轴 Pivot Hinge


Z1D03
下轴 Bottom Pivot

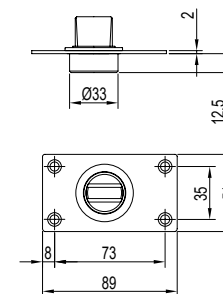

Z1D04
顶轴 Top Pivot

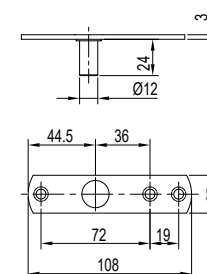

Z1D05
顶轴 Top Pivot


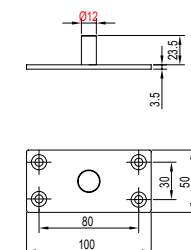


- 推荐承重150Kg
- Z1D03/Z1D05 面板采用304不锈钢, Z1D04 面板采用碳素钢
- 表面处理为亚光
- 无定位功能
- 下轴Z1D03出厂标准为14° (凸轮轴角度)
- Z1D04适用最大门厚62mm,Z1D05适用最大门厚68mm
- 适用于木门、金属门、有框门、无框玻璃门等门型
- Maximum loading 150Kg
- Z1D03/Z1D05 Panel Made of stainless steel 304, Z1D04 panel is made of carbon steel
- With satin finish
- No positioning function
- Z1D03 The standard cam spindle is 14°
- Z1D04 The maximum gate thickness is 62mm, Z1D05 The maximum gate thickness is 68mm
- Suit for wooden door, metal door door , frame door and frameless glass door

S5K05

型材门中间锁 Profile door middle lock

新

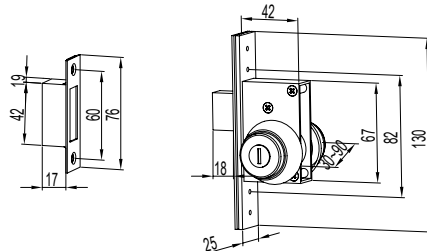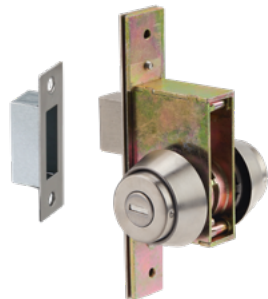


适用门扇厚度30~90mm
主要材质为锁头盖304不锈钢, 主体锌合金
表面处理为亚光+镀锌锌
订购时须提供门扇厚度
锁头形式为双锁头, 具有防尘功能
安装在门扇中部

Applicable door thickness is 30~90mm
The main material for lock cover 304 stainless steel, Lock body is made of zinc alloy
Surface treatment for matte + zinc plating
Provide door thickness when ordering
Double locks, With dustproof function
Installed in the middle of the door

S6K02

地锁 Profile door lock

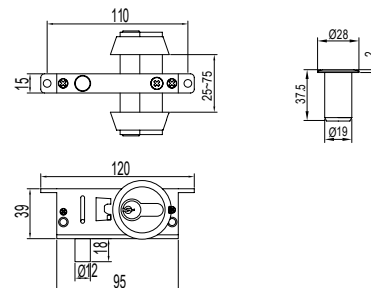


适用门扇厚度25~75mm
主要材质为锁头盖304不锈钢, 主体锌合金
表面处理为亚光+镀锌
订购时须提供门扇厚度
锁头形式为双锁头
采用防尘设计
安装在门扇底部

Applicable door thickness is 25~75mm
Main material is lock head cover 304 stainless steel, Lock body is made of zinc alloy
Surface treatment is satin + nickel plating
Provide door thickness when ordering
The lock head is double lock;
The tube is designed for dustproof
Install at the bottom of the door

S6K03

隔热型材地锁 Heat insulation profile bottom lock

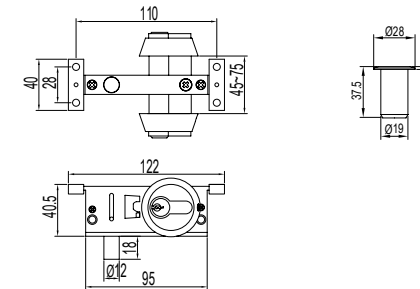


适用门扇厚度为45~75mm
隔热型材专用
主要材质为锁头盖304不锈钢, 主体锌合金
表面处理为亚光+镀锌
订购时须提供门扇厚度
锁头形式为双锁头
采用防尘设计
安装在门扇底部

Applicable door leaf thickness is 45~75mm
Special for heat insulation profiles
Main Material: Decoration cover plate:S.S. 304, Lock body is made of zinc alloy
Surface treatment is satin + nickel plating
Provide door thickness when ordering
Double Lock
The tube is designed for dustproof
Install at the bottom of the door

S6K04

地锁 Profile bottom lock

新

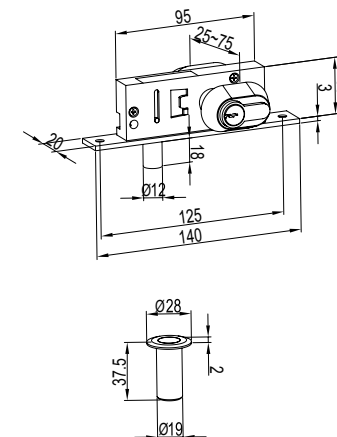


适用门扇厚度为25~75mm
主要材质为锁头盖304不锈钢, 主体锌合金
表面处理为亚光+镀锌
订购时须提供门扇厚度
锁头形式为双锁头
采用防尘设计
安装在门扇底部

Applicable door leaf thickness is 25~75mm
Main material is lock head cover 304 stainless steel, Lock body is made of zinc alloy
Surface treatment is satin + nickel plating
Provide door thickness when ordering
Double Lock
The tube is designed for dustproof
Install at the bottom of the door

S6K05

地锁 Profile door bottom lock

新

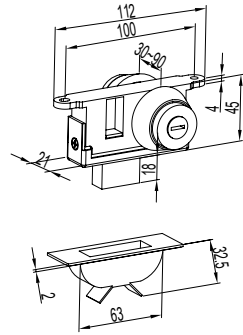

适用门扇厚度30~90mm
主要材质为锁头盖304不锈钢, 主体锌合金
表面处理为亚光+镀彩锌
订购时须提供门扇厚度
锁头形式为双锁头, 具有防尘功能
锁盒具有渗水孔
安装在门扇中部

Applicable door thickness is 30~90mm
The main material for lock cover 304 stainless steel, Lock body is made of zinc alloy
Surface treatment for matte + zinc plating
Provide door thickness when ordering
Double locks, With dustproof function
The lock box has a seepage hole
Installed in the middle of the door

C1X02

插销 Latch




主体
Main Body



防尘筒
Dustproof
Tube



导向支架
Support
Component

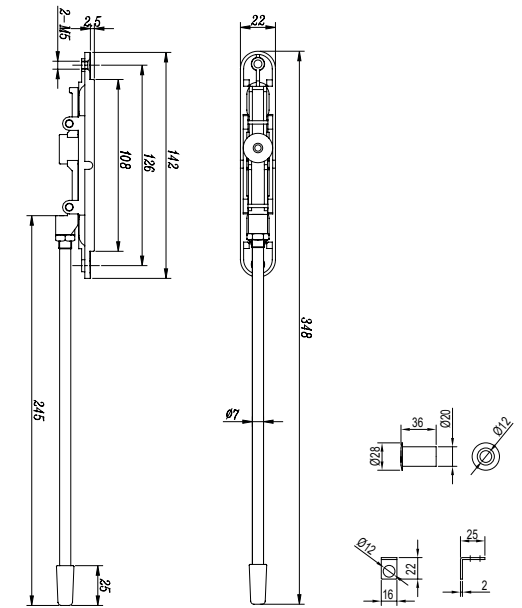

主要材质: 主体锌合金, 插销杆碳钢
表面处理: 主体银灰色烤漆, 插销杆镀彩锌
导向支架具有导向作用, 保证使用稳定
防尘筒可杜绝灰尘等杂物进入
有效保证插销杆运行顺畅
对于安装中部门锁的双扇门, 必须安装插销

Main Material: Main body is zinc alloy, latch bar is carbon steel
Surface Finish: Main body is the silver gray stoving varnish, latch bar is color-plated zinc
The support component has guide function and stable operation.
Dust-proof cylinder can prevent dust and other debris from entering effectively ensuring smooth operation of the bolt;
For the double door with the inter mediate door lock, glass door latch is needed.


7

Handle series

拉手类

- 款式多样，满足不同风格门型使用
- 规格齐全，可根据工程需要定制长度
- Diverse type applicable for different style doors
- A complete range of specifications and length can be customized according to the project



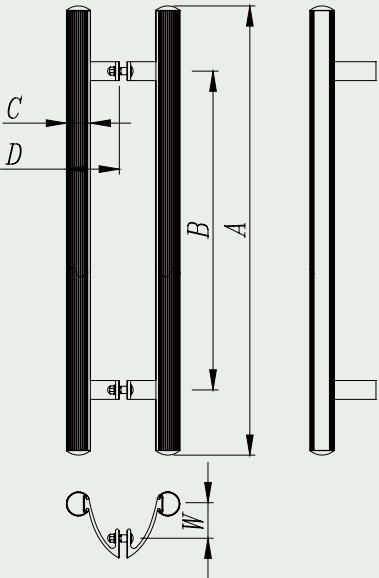



产品尺寸释义

- A 拉手总长
B 拉手开孔中心距
C 钢管规格
D 拉手外侧至玻璃面距离
W 拉手钢管至安装孔中心距离

Definition for letter :

- A Handle length
B Center distance Hole Center to Center
C Steel pipe diameter
D The Distance from Handle outboard to Glass panel
W The distance from handle tube to fix center

编号含义注释 Serial number meaning annotation

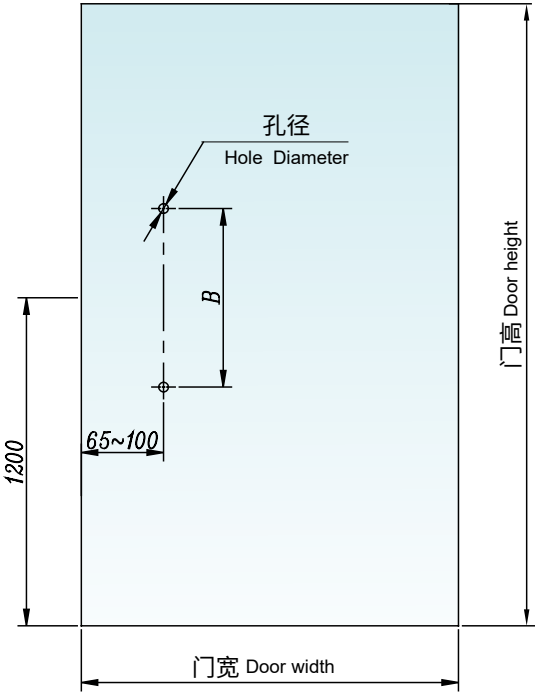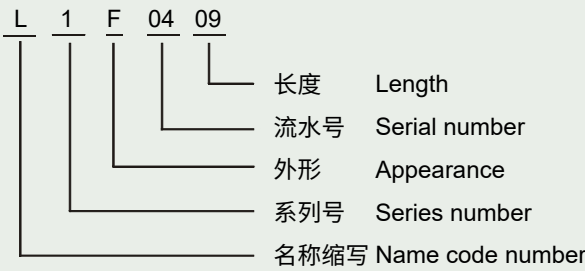


注:

- 1.安装孔的开孔直径参考值详见各拉手型号
- 2.当门宽超过1000mm,需调整拉手中心至门边距离(65-100)

Note:


- 1.The reference value of opening diameter of mounting hole is shown in detail in each handle model.
- 2.When the width of the door is more than 1000mm,you should adjust the distance between the handle center and door edge(65-100).

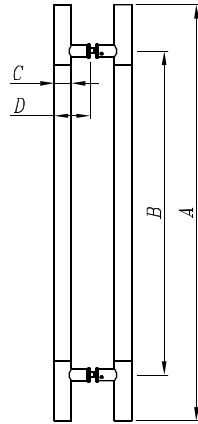

L1Y01 拉手 Handle

主要材质：304 不锈钢 Main material: Stainless steel 304
表面处理：亚光+镜光 Finish: Satin & Mirror
开孔尺寸：φ14mm(玻璃门 Frame glass door)
Hole size：φ10mm(有框门、木门 Frame door and Wooden door)


型号Code	A(mm)	B(mm)	C(mm)	D(mm)
L1Y0104	450	300	φ32X0.8	72
L1Y0106	600	400	φ32X0.8	72
L1Y0108	800	600	φ32X0.8	72
L1Y0110	1000	800	φ38X0.8	80
L1Y0112	1200	1000	φ38X0.8	80
L1Y0115	1500	1300	φ38X0.8	80
L1Y0118	1800	1600	φ38X0.8	80
L1Y0120	2000	1600	φ38X1.2	80
L1Y0122	2200	1800	φ38X1.2	80
L1Y0124	2400	1800	φ38X1.2	80
L1Y0126	2600	1800	φ38X1.2	80

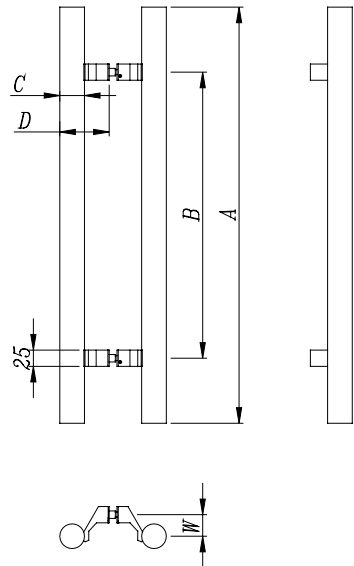

L1Y02B 拉手 Handle

主要材质：304 不锈钢 Main material: Stainless steel 304
表面处理：亚光 Finish: Satin
开孔尺寸：φ14mm(玻璃门 Frame glass door)
Hole size：φ10mm(有框门、木门 Frame door and Wooden door)

型号Code	A(mm)	B(mm)	C(mm)	D(mm)	W(mm)
L1Y0208B	800	600	φ38X0.8	76	33
L1Y0210B	1000	800	φ38X0.8	76	33
L1Y0212B	1200	1000	φ38X0.8	76	33
L1Y0215B	1500	1300	φ38X0.8	76	33
L1Y0218B	1800	1500	φ38X0.8	76	33
L1Y0220B	2000	1700	φ38X1.2	76	33

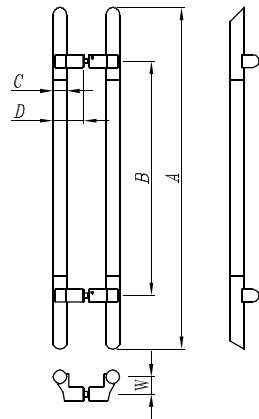


L1Y03 拉手 Handle

主要材质：304 不锈钢 Main material: Stainless steel 304
表面处理：亚光+镜光 Finish: Satin & Mirror
开孔尺寸：φ14mm(玻璃门 Frame glass door)
Hole size：φ10mm(有框门、木门 Frame door and Wooden door)

型号Code	A(mm)	B(mm)	C(mm)	D(mm)	w(mm)
L1Y0308A	800	600	φ32X0.8	67	40
L1Y0310	1000	800	φ32X0.8	67	40
L1Y0312	1200	1000	φ38X0.8	74	40
L1Y0315	1500	1300	φ38X0.8	74	40
L1Y0318	1800	1500	φ38X0.8	74	40
L1Y0320	2000	1700	φ38X1.2	74	40


支撑体采用不锈钢精密铸造
Supporting Block is made of precise-cast stainless steel

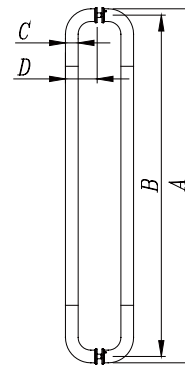

L1Y06 拉手 Handle

主要材质：304 不锈钢 Main material: Stainless steel 304
表面处理：亚光+镜光 Finish: Satin & Mirror
开孔尺寸：φ14mm(玻璃门 Frame glass door)
Hole size：φ10mm(有框门、木门 Frame door and Wooden door)

型号Code	A(mm)	B(mm)	C(mm)	D(mm)
L1Y0603	300	275	φ25X0.8	72
L1Y0605	500	468	φ32X0.8	82
L1Y0606	600	568	φ32X0.8	82
L1Y0608	800	768	φ32X0.8	82
L1Y0610	1000	962	φ38X0.8	97
L1Y0612	1200	1162	φ38X0.8	97
L1Y0615	1500	1462	φ38X0.8	97
L1Y0618	1800	1762	φ38X1.2	97
L1Y0620	2000	1962	φ38X1.2	97

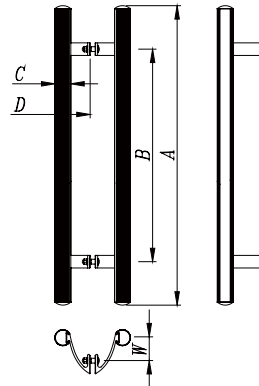


L1Y05B 拉手 Handle

主要材质：铝合金 Main material: Aluminum alloy
表面处理：深灰、咖啡 Finish: Dark Gray,coffee
开孔尺寸：φ15mm Hole size: φ15

型号Code	A(mm)	C(mm)	D(mm)	W(mm)
L1Y0506B	600	φ38X1.2	94	54
L1Y0508B	800	φ38X1.2	94	54
L1Y0510B	1000	φ38X1.2	94	54
L1Y0512B	1200	φ38X1.2	94	54
L1Y0515B	1500	φ38X1.2	94	54
L1Y0518B	1800	φ38X2.0	94	54

1.因摄像及印刷的效果，实物与图片存在差异，请以实物为准
2.中心距B在总长A范围内可调节


1. There will be some differences between the product fittings and pictures as the camera and printing effect, please kindly object to the product fittings
2.Center Distance B is adjustable, but within the length of A

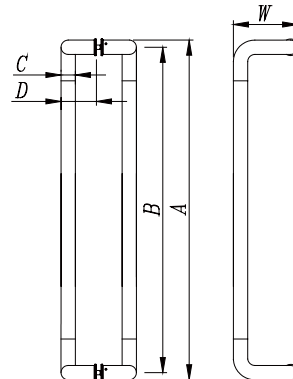

L1Y07 拉手 Handle

主要材质：304 不锈钢 Main material: Stainless steel 304
表面处理：亚光+镜光 Finish: Satin & Mirror
开孔尺寸：φ14mm(玻璃门 Frame glass door)
Hole size：φ10mm(有框门、木门 Frame door and Wooden door)


型号Code	A(mm)	B(mm)	C(mm)	D(mm)	W(mm)
L1Y0703	300	275	φ25X0.8	70	111
L1Y0704	457	425	φ32X0.8	80	127
L1Y0706	600	562	φ38X1.2	90	160
L1Y0708	800	762	φ38X1.2	90	160
L1Y0710	1000	962	φ38X1.2	90	160
L1Y0712	1200	1162	φ38X1.2	90	160

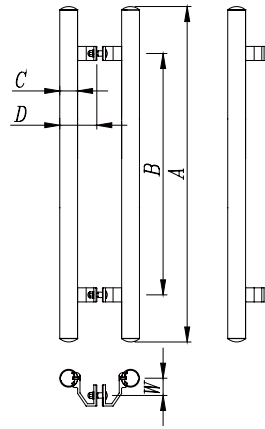

L1Y08 拉手 Handle

主要材质：铝合金 Main material: Aluminum alloy
表面处理：深灰、咖啡 Finish: Dark Gray,coffee
开孔尺寸：φ15mm Hole size: φ15


型号Code	A(mm)	B(mm)	C(mm)	D(mm)	W(mm)
L1Y0812	1200	1000	φ38X2.0	80	38
L1Y0815	1500	1300	φ38X2.0	80	38
L1Y0818	1800	1600	φ38X2.0	80	38
L1Y0820	2000	1800	φ38X2.0	80	38

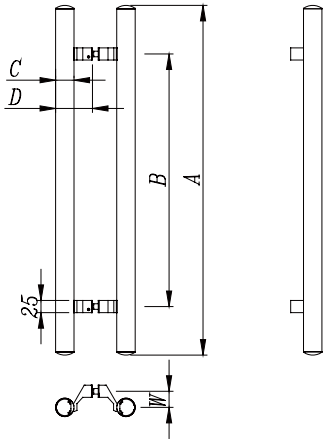

L1Y10 拉手 Handle

主要材质：铝合金+不锈钢 Main material: Aluminum alloy+Stainless steel
表面处理：黑色+亚光（支撑体）、咖啡+亚光（支撑体）
Finish: Black + Satin(support), coffee + Satin (support)
开孔尺寸：φ14mm(玻璃门 Frame glass door)
Hole size: φ10mm(有框门、木门 Frame door and Wooden door)


型号Code	A(mm)	B(mm)	C(mm)	D(mm)	W(mm)
L1Y1012	1200	1000	φ38X2.0	76	33
L1Y1015	1500	1300	φ38X2.0	76	33
L1Y1018	1800	1600	φ38X2.0	76	33
L1Y1020	2000	1800	φ38X2.0	76	33

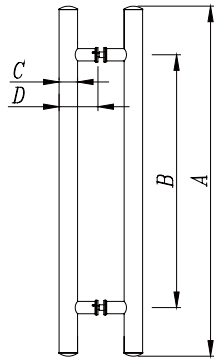

L1Y09 拉手 Handle

主要材质：铝合金+不锈钢 Main material: Aluminum alloy+Stainless steel
表面处理：黑色+镜光（支撑体）、咖啡+镜光（支撑体）
Finish: Black + mirror (support), coffee + mirror light (support)
开孔尺寸：φ14mm(玻璃门 Frame glass door)
Hole size: φ10mm(有框门、木门 Frame door and Wooden door)


型号Code	A(mm)	B(mm)	C(mm)	D(mm)
L1Y0912	1200	1000	φ38X2.0	80
L1Y0915	1500	1300	φ38X2.0	80
L1Y0918	1800	1600	φ38X2.0	80
L1Y0920	2000	1800	φ38X2.0	80

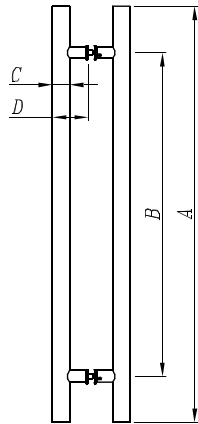

L1Y11 拉手 Handle

主要材质：304 不锈钢 Main material: Stainless steel 304
表面处理：亚光 Finish: Satin
开孔尺寸：φ14mm(玻璃门 Frame glass door)
Hole size: φ10mm(有框门、木门 Frame door and Wooden door)


型号Code	A(mm)	B(mm)	C(mm)	D(mm)
L1Y1108	800	600	φ38X0.8	80
L1Y1110	1000	800	φ38X0.8	80
L1Y1112	1200	1000	φ38X0.8	80
L1Y1115	1500	1300	φ38X0.8	80
L1Y1118	1800	1500	φ38X0.8	80
L1Y1120	2000	1700	φ38X1.2	80

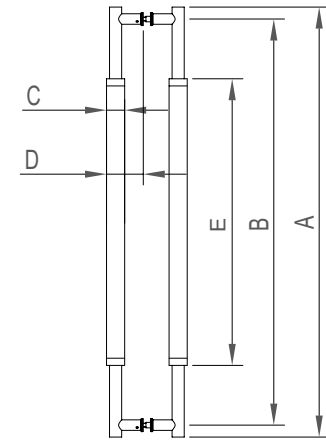

L1Y12 拉手 Handle

主要材质：304 不锈钢 Main material: Stainless steel 304
表面处理：亚光+镜光 Finish: Satin & Mirror
开孔尺寸：φ14mm(玻璃门 Frame glass door)
Hole size：φ10mm(有框门、木门 Frame door and Wooden door)

型号Code	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
L1Y1208	800	750	φ38X0.8	77	500
L1Y1210	1000	950	φ38X0.8	77	700
L1Y1212	1200	1150	φ38X0.8	77	900
L1Y1215	1500	1450	φ38X0.8	77	1200
L1Y1218	1800	1750	φ38X0.8	77	1500

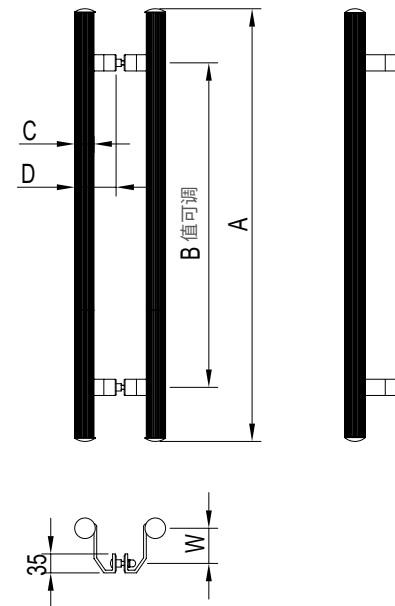


L1Y13 拉手 Handle

主要材质：铝合金 Main material: Aluminum alloy
表面处理：深灰、咖啡、黑色 Finish: Dark Gray,coffee,Black
开孔尺寸：φ15mm Hole size: φ15

型号Code	A(mm)	C(mm)	D(mm)	W(mm)
L1Y1310	1000	φ38X1.2	76	65
L1Y1312	1200	φ38X1.2	76	65
L1Y1315	1500	φ38X1.2	76	65
L1Y1318	1800	φ38X2.0	76	65


- 1.因摄像及印刷的效果，实物与图片存在差异，请以实物为准
2.中心距B在总长A值范围内可调节
1.There will be some differences between the real fittings and pictures as the camera and printing effect, please kindly object to the real fittings.
2.Center Distance B is adjustable, but within the length of A

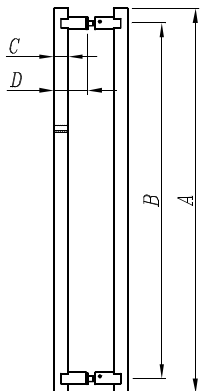

L1F01 拉手 Handle

主要材质：304 不锈钢 Main material: Stainless steel 304
表面处理：亚光 Finish: Satin
开孔尺寸：φ14mm(玻璃门 Frame glass door)
Hole size：φ10mm(有框门、木门 Frame door and Wooden door)


型号Code	A(mm)	B(mm)	C(mm)	D(mm)
L1F0104	450	300	30X15X0.8	75
L1F0106	600	540	30X15X0.8	75
L1F0108	800	700	38X25X0.8	75
L1F0112	1200	1100	38X25X0.8	75
L1F0115	1500	1300	38X25X0.8	75
L1F0118	1800	1600	38X25X0.8	75
L1F0120	2000	1800	50X25X1.2	75

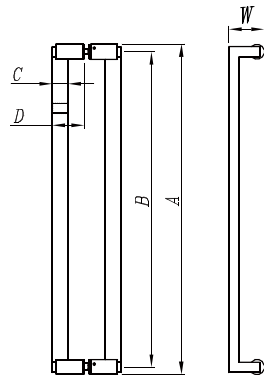

L1F03 拉手 Handle

主要材质：304 不锈钢 Main material: Stainless steel 304
表面处理：亚光 Finish: Satin
开孔尺寸：φ14mm(玻璃门 Frame glass door)
Hole size：φ10mm(有框门、木门 Frame door and Wooden door)


型号Code	A(mm)	B(mm)	C(mm)	D(mm)	W(mm)
L1F0308	800	765	38X25X0.8	78	75
L1F0312	1197	1162	38X25X0.8	78	75
L1F0315	1500	1465	38X25X0.8	78	75
L1F0318	1835	1800	38X25X1.2	78	75
L1F0320	2000	1965	38X25X1.2	78	75

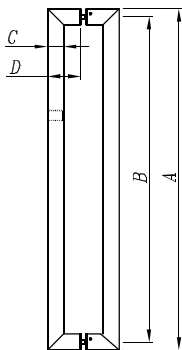

L1F02 拉手 Handle

主要材质：304 不锈钢 Main material: Stainless steel 304
表面处理：亚光 Finish: Satin
开孔尺寸：φ14mm(玻璃门 Frame glass door)
Hole size：φ10mm(有框门、木门 Frame door and Wooden door)

型号Code	A(mm)	B(mm)	C(mm)	D(mm)
L1F0206A	600	562	38X25X0.8	78
L1F0208	800	762	38X25X0.8	78
L1F0210	1000	962	38X25X0.8	78
L1F0212	1200	1162	38X25X0.8	78
L1F0215	1500	1462	38X25X0.8	78
L1F0218	1800	1762	38X25X1.2	78
L1F0220	2000	1950	50X25X1.2	90

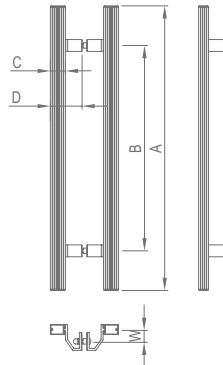


L1F07 拉手 Handle

主要材质：铝合金 Main material: Aluminum alloy
表面处理：深灰、咖啡 Finish: Dark Gray,coffee
开孔尺寸：φ15mm Hole size: φ15

型号Code	A(mm)	C(mm)	D(mm)	W(mm)
L1F0708	800	38X25X1.2	80	30
L1F0710	1000	38X25X1.2	80	30
L1F0712	1200	38X25X1.2	80	30
L1F0715	1500	38X25X1.2	80	30
L1F0718	1800	38X25X1.2	80	30

- 1.因摄像及印刷的效果，实物与图片存在差异，请以实物为准
- 2.中心距B在总长A值范围内可调节
1. There will be some differences between the real fittings and pictures as the camera and printing effect, please kindly object to the real fittings.
2. Center Distance B is adjustable, but within the length of A

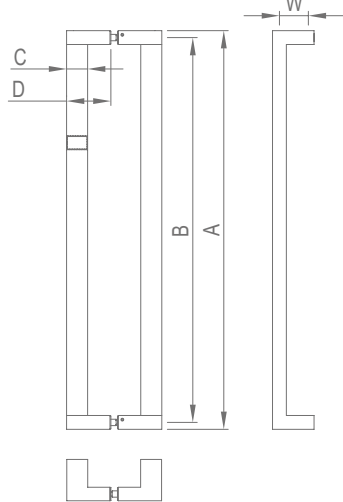


L1F08

拉手 Handle

主要材质：304 不锈钢 Main material: Stainless steel 304
表面处理：亚光 Finish: Satin
开孔尺寸：φ14mm(玻璃门 Frame glass door)
Hole size：φ10mm(有框门、木门 Frame door and Wooden door)

型号Code	A(mm)	B(mm)	C(mm)	D(mm)	W(mm)
L1F0808	800	775	38X25X0.8	78	43.5
L1F0810	1000	975	38X25X0.8	78	43.5
L1F0812	1200	1175	38X25X0.8	78	43.5
L1F0815	1500	1475	38X25X0.8	78	43.5
L1F0818	1800	1775	38X25X1.2	78	43.5
L1F0820	2000	1975	38X25X1.2	78	43.5

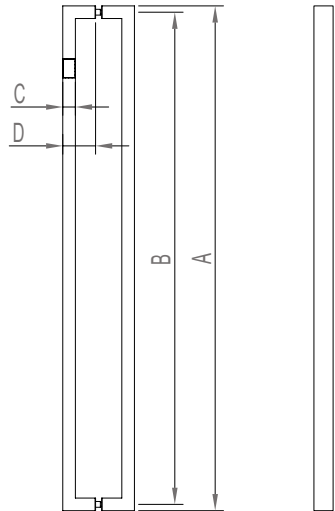


L1F10

拉手 Handle

主要材质：304 不锈钢 Main material: Stainless steel 304
表面处理：亚光 Finish: Satin
开孔尺寸：φ14mm(玻璃门 Frame glass door)
Hole size：φ10mm(有框门、木门 Frame door and Wooden door)

型号Code	A(mm)	B(mm)	C(mm)	D(mm)
L1F1008	800	775	25X38X0.8	65
L1F1010	1000	975	25X38X0.8	65
L1F1012	1200	1175	25X38X0.8	65
L1F1015	1500	1475	25X38X0.8	65
L1F1018	1800	1775	25X38X1.2	65
L1F1020	2000	1975	25X38X1.2	65




L1T01 拉手 Handle


主要材质：304 不锈钢 Main material: Stainless steel 304
表面处理：亚光+镜光 Finish: Satin & Mirror
开孔尺寸：φ14mm(玻璃门 Frame glass door)
Hole size：φ10mm(有框门、木门 Frame door and Wooden door)

型号Code	A(mm)	B(mm)	C(mm)	D(mm)
L1T0108	800	755	45X25X1.2	80
L1T0110	1000	955	45X25X1.2	80
L1T0112	1200	1155	45X25X1.2	80
L1T0115	1500	1455	45X25X1.2	80
L1T0118	1800	1755	45X25X1.2	80
L1T0120	2000	1955	45X25X1.2	80

左、右开门定义
The definition of Left-open and Right-open door

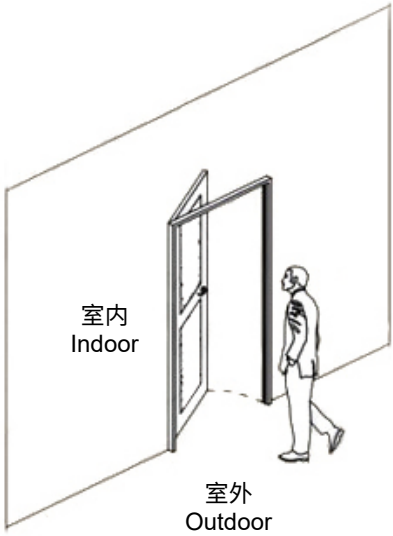


左内开
Left inside open

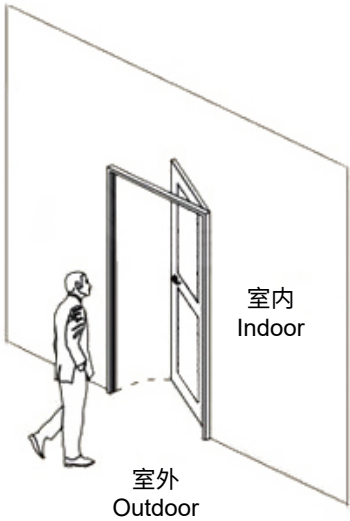


右内开
Right inside open



左外开
Left outside open

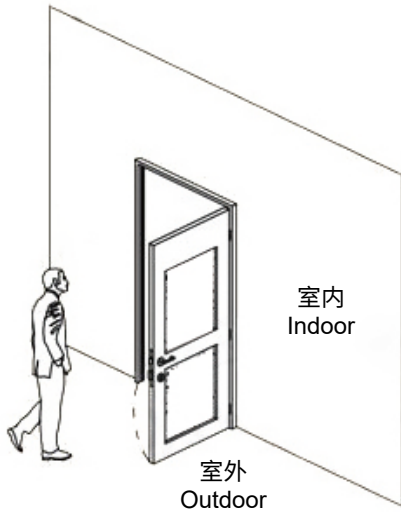

右外开
Right outside open

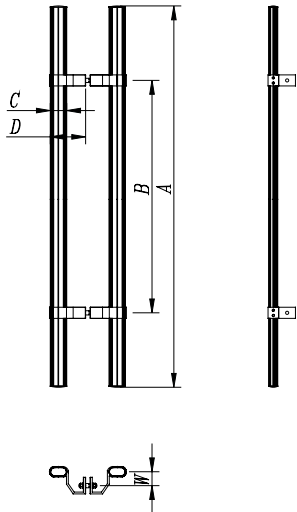

L1T02B 拉手 Handle

主要材质：铝合金 Main material: Aluminum alloy
表面处理：深灰、咖啡 Finish: Dark Gray,coffee
开孔尺寸：φ15mm Hole size: φ15

型号Code	A(mm)	C(mm)	D(mm)	W(mm)
L1T0206B	600	45X25X1.2	96	38
L1T0208B	800	45X25X1.2	96	38
L1T0210B	1000	45X25X1.2	96	38
L1T0212B	1200	45X25X1.2	96	38
L1T0215B	1500	45X25X1.2	96	38
L1T0218B	1800	45X25X2.0	96	38

- 1.因摄像及印刷的效果，实物与图片存在差异，请以实物为准
2.中心距B在总长A值范围内可调节
1. There will be some differences between the real fittings and pictures as the camera and printing effect, please kindly object to the real fittings.
2. Center Distance B is adjustable, but within the length of A