

* All rights reserved
* Print Jan,2020.

Zrenite 特 灵
KIN LONG

Zrenite 特 灵
KIN LONG

Safety Equipment SeriesLeading
Technology/Quality Based/Service Winning





Company profile

Guang Dong Trenite Safety Equipments Co., Ltd. is a wholly-owned subsidiary of Guang Dong KIN LONG Hardware Products Co., Ltd. It is engaged in professional safety equipment products, building coating, waterproof material, polyurethane seam filler, construction tapes and so on, to provide a full range of products solutions for the personnels in the field of construction, manufacturing, maintenance and other industries.


Trenite has a number of highly qualified management, product research and development design personnel and adopts a modern management mode combining institutionalization, standardization and informationization. The whole processes of product from manufacturing to delivery are carried out under strict quality control, which can make product quality fully guaranteed. With the operating concept of leading with high technology, based on high quality, winning by good service, Trenite has won the trust and praise of our customers.

Guang Dong KIN LONG Hardware Products Co., Ltd. is an innovative and professional company engaged in research, development, manufacture, and marketing of fittings for architectural hardware. KIN LONG supplies fittings of high quality and provides consulting services to the architectural industry. Through many years' development, KIN LONG achieves a good reputation in construction industry. With a successful IPO on the SME board of Shenzhen Stock Exchange, KIN LONG has become the largest listed company in the construction hardware industry. Stock abbreviation is "KIN LONG HARDWARE", Stock code "002791".

We'll adhere to the philosophy of parent company:respecting science; striving coexistence and all-win; promoting constant innovation; pursuing sincerity and trustworthiness. Trenite has become the symbol of high quality and reliable partner in safety equipment field by regarding improving safety production and creating value for customers as its own responsibility.

1 Production Technology - Continuous Innovation

Trenite has imported German DESMA mechanical arm and applied to each important link. Besides it sharply enhances the production efficiency as well as reduces the cost and make our product quality more stable.

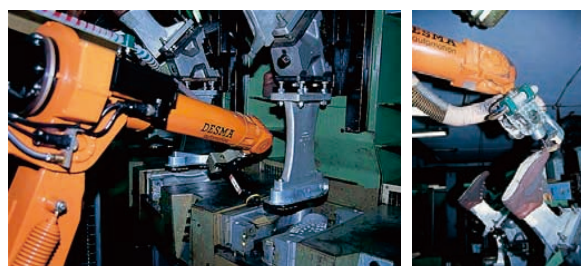

2 One injection Products - Leading the Industry Trend

With the product's advantage of one injection, plus specified person, profession and concentrated work spirit, we devote ourself to supplying exclusive quality products.

3 Product Diversity - Cover All Details

Trenite Products include all kinds of safety shoes, working shoes and so on, to meet With the different demands of markets. All products are designed by our professional engineers and our advantages come from continuous improving of product performance .



4 GB/ EU CE Certification

Trenite products are based on high quality ,has passed a various of national standard certifications of safety protection and conform to EU Standards.

Trenite GB Test Certification



《WX0163-2017》
certification

《WX0164-2017》
certification

《WX0165-2017》
certification

《WM0863-2017》
certification



Trenite Business License




《No.2018(带)-004》
Certification



《WH0202-2018》
Certification

CONTENTS

01 Safety Helmet Series	02
02 Safety Shoes Series	04
03 Reflective Vest Series	16
04 Jacket Series	20
05 Work Suits Series	23
06 Protective Mask Series	26
07 Safety Belt Series	28
08 Protective Gloves Series	30
09 Anti-slip Tape Series	36
10 Work Package Series	38
11 Protective Glasses Series	41
12 Protective Respirator Series	43
13 Earplug Series Products	45
14 Transportation facilities products	47

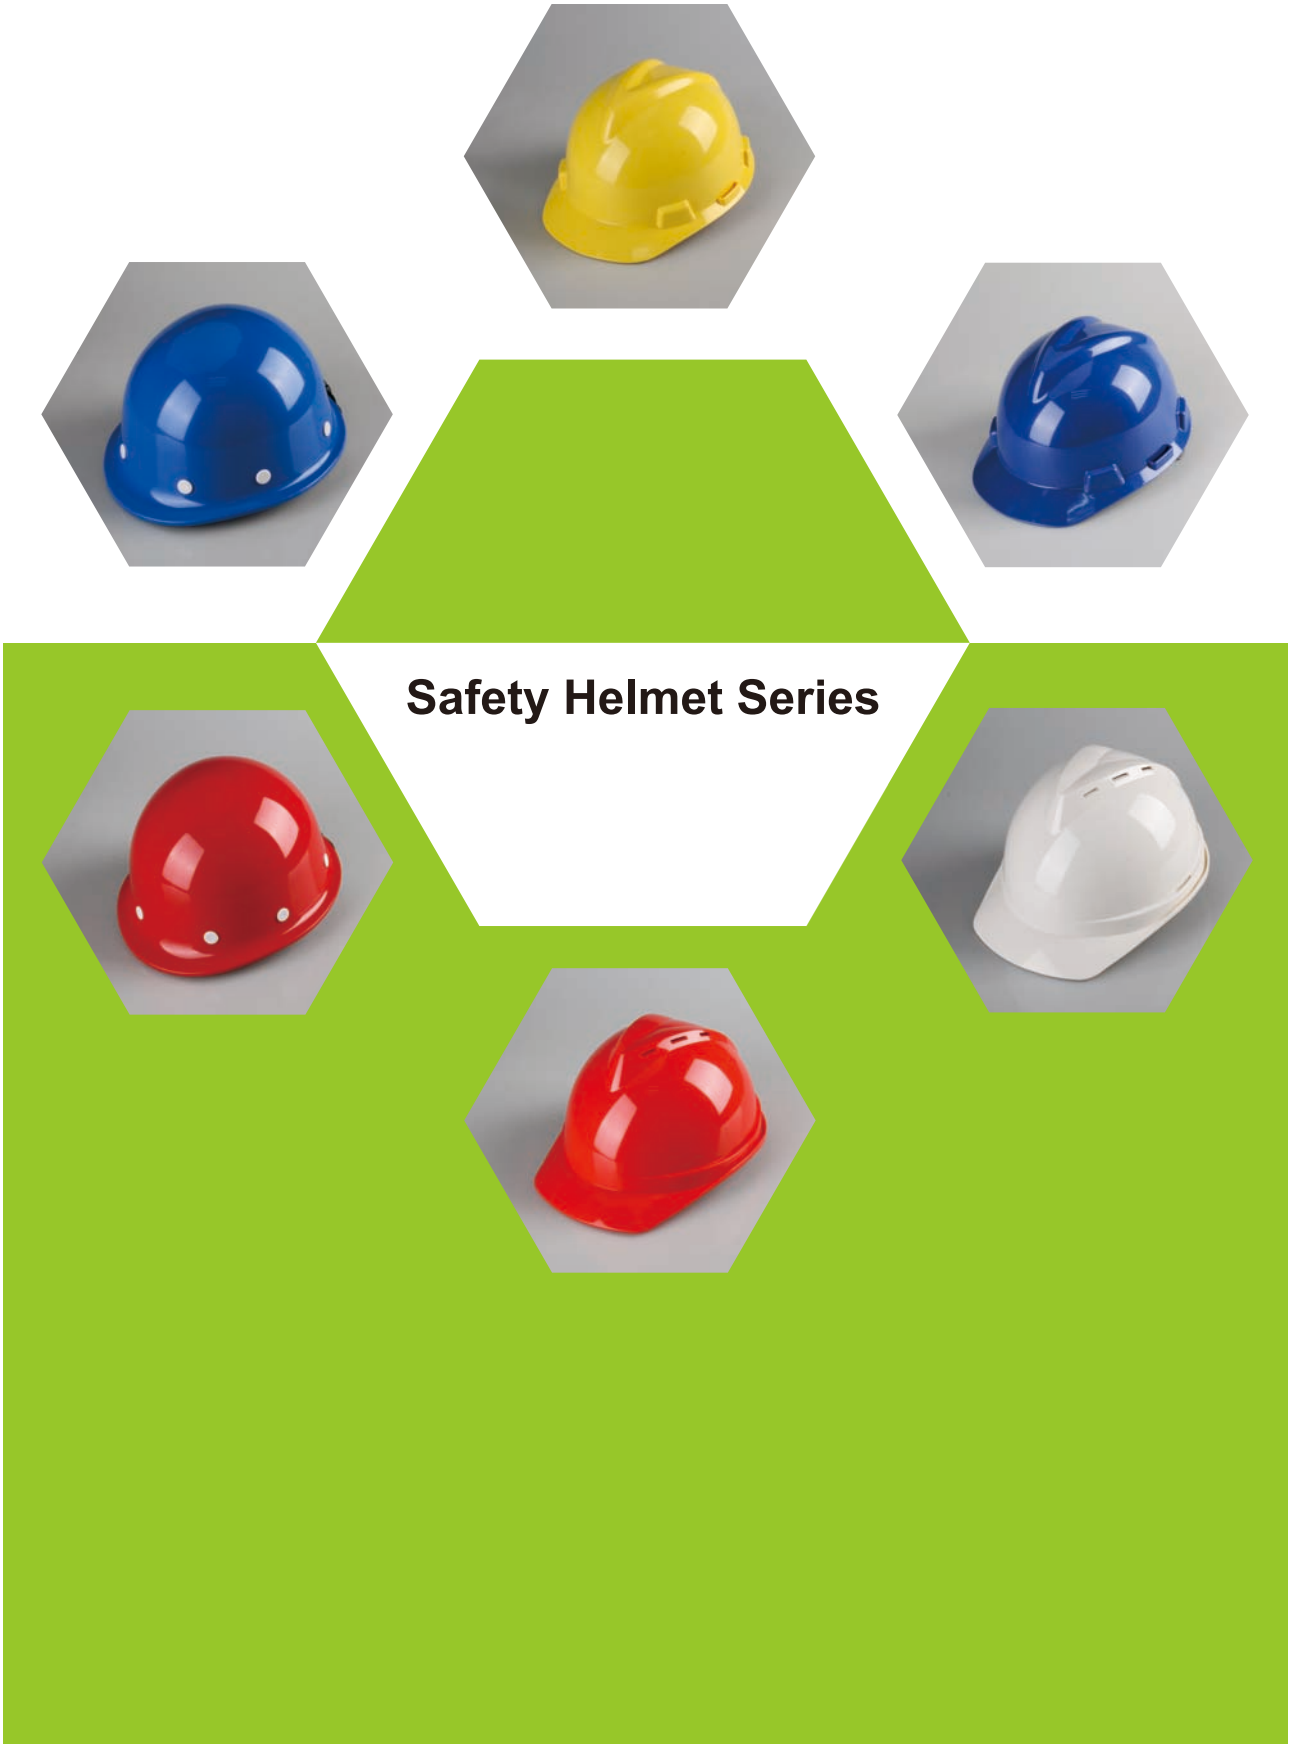

TLM-001

FOUR SIGHTS PE LINING | ROTATION ADJUSTMENT

Standard:GB2811-2007

Material:ABS

Type:Classical V type

Color:Red, yellow, white, blue

Design:Slots at both sides, could wear protective mask or other sound proof device

Using Environment:high temperature 50 degree centigrade/low temperature -10 degree centigrade

Applicable Industry:Automobile manufacturing, light industry, building, food and manufacturing



TLM-003

EIGHT SIGHTS PE LINING | ROTATION ADJUSTMENT

Standard:GB2811-2007

Material:ABS

Type:Classical V type

Color:Red, yellow, white, blue

Design:Air vent structure at top two sides to promote the air ventilation

Using Environment:High temperature 50±2 degree centigrade/low temperature -10 ±2degree centigrade

Applicable Industry:Metallurgy, mine, shipbuilding, architecture, etc



TLM-010

8-POINT LINING/ROTATION ADJUSTMENT

Standard:GB2811-2007

Material:ABS

Style:Classic Round

Color:Red, Yellow, Blue, White

Design:8-point PE lining, Knob adjustment

Using Environment:Max +50°C, Lowest -10°C

Applicable industry:Automotive Manufacturing, light industry, Construction, Food Manufacturing, Other Manufacturing Industry.




Safety Shoes Series





► Sole Section

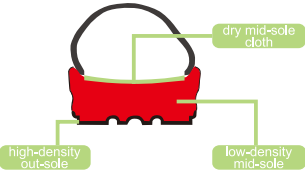


► 加宽钢头设计

Trenite safety shoes are designed according to human foot types, using widen steel toe , has the advantages of anti-smashing, impact resistance, high pressure resistance, surpassing European CE standard and international GB standard.Steel toe adopts these anti-corrosion treatments like anode baking finish, powder coating, etc. Plastic-steel toe is super light, not only safety, but also more comfortable.

Perspective Drawing of Steel Toe



Trenite Widen Steel Toe




Other Ordinary Safety Shoes Steel Toe in Market

► Out-sole: High density out-sole

High density, wear resistance, oil resistance, anti-slip, density index:1.08-1.18g/cm3, direct injection molding, the connection between out-sole and inner-sole is very strong, never will be split.

► Inner-sole: Low density inner-sole.

Low density, light weight, good elasticity, density index:0.45-0.5g/cm3, direct injection molding makes the mid-sole and inner -sole is 100% touched, no need for sewing thread.

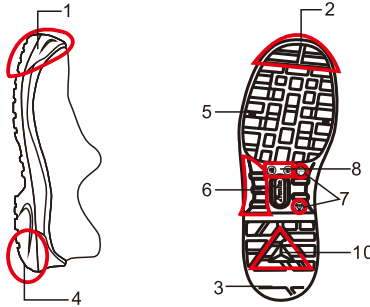

NO.	Function Introduction	Diagram	NO.	Function Introduction	Diagram
1	Anti-kick Design widen & thickened steel toe design, to avoid kicking from hurting.		6	Rib Design Rib design at out-sole waist maximizes the safety efficiency in staircase or slope.	
2	Toe Warped design Avoid stumbling when people are in walking		7	Size and Function Mark Clear size mark is convenient for trying, comparing, and selecting.	 例如: 42码 例如: SP
3	Anti-slip Prevent the accident caused by slipping.		8	Quality Traceability 1 Production date is clearly indicated, to make sure the product quality can be traced by material incoming number, make the entire processes "incoming, producing, finished product" are under control.	 例如: 2001年7月
4	Durability 1 Prevention of unilateral wear after sole are worn out		9	Quality Traceability 2 Integrate the basic information like production machine, production date, production sequence, etc. into the bar code in shoes box, controlling the quality at every detail.	 鞋机序号 生产年月日 生产顺序号
5	Durability 2 Anti-slip stereo lines adopt fillet design which can scatter the stress and prevent the sole from breaking.		10	Heel Function of Relieving the Stress Exclusive triangle bears the load circularly, relieving the pressure on the heel.	

TLX-120ZCD-GG

SAFETY SHOES



Main Function: Anti-smash & Anti-puncture & Anti-static
Vamp: Real Leather
Out-sole: PU+PU
Steel Toe: Metal Steel Toe+ Steel Plate
Other Function: Anti-kick & slip, oil resistance, weak acid and alkali resistance.
Standard: Conform to GB/EN



TLX-111ZCJ

SAFETY SHOES



Main Function: Anti-smashing, Anti-puncture. Electrical insulation
Vamp: Imported Shuyou leather
Sole: PU+PU
Inner: Widen plastic toe cap+anti-puncture cloth
Other Functions: Anti-slip+oil resistance+ acid and alkali resistance
Standard: Conform to GB/EN



TLX-101ZC

SAFETY SHOES



Main Function: Anti-smashing, Anti-puncture. Electrical insulation
Vamp: Imported top layer of buffalo skin
Sole: PU+PU
Inner: Steel toe cap+Anti-stab steel plate
Other Functions: Anti-slip+oil resistance+acid and alkali resistance
Standard: Conform to GB/EN



TLX-Z-117ZDG

SAFETY SHOES



Main Function: Anti-puncture. Electrical insulation, High temperature resistance.
Vamp: Breathable Shuyou Leather+Breathable Mesh
Sole: PU+rubber
Inner: Widen plastic-steel toe
Other Functions: Anti-slip+oil resistance+acid and alkali resistance
Standard: Conform to GB/EN



TLX-Z-119ZCD

SAFETY SHOES



Main Function:Anti-puncture+Electrical insulation+Anti-smashing
Vamp: Buffalo leather+vent
Sole:PU+PU
Inner:Steel toe cap+Anti-stab steel plate
Other Functions:Anti-slip+oil resistance+ acid and alkali resistance
Standard: Conform to GB/EN
King safety shoes



TLX-Z-121ZCD

SAFETY SHOES



Main Function:Anti-smashing, Anti-puncture. Electrical insulation
Vamp:Imported top layer of buffalo skin
Sole:PU+PU
Inner:Steel toe cap +Anti-stab steel plate
Other Functions:Anti-slip+oil resistance+acid and alkali resistance
Standard: Conform to GB/EN
King safety shoes



TLX-Z-120ZCD

SAFETY SHOES



Main Function:Anti-smashing,Anti-puncture. High temperature resistance
Vamp:Imported top layer of buffalo skin
Sole:PU+rubber
Inner:Steel toe cap+Anti-stab steel plate
Other Functions:Anti-slip+oil resistance+acid and alkali resistance
Standard:Conform to GB/EN
King safety shoes



TLX-122ZJN

SAFETY SHOES



Main Function:Anti-puncture. Keep warm,Electrical insulation
Vamp: Imported top layer of buffalo skin
Sole:PU+PU
Inner:Widen plastic-steel toe
Other Functions:Anti-slip+oil resistance+ acid and alkali resistance
Standard: Conform to GB/EN
King safety shoes



TLX-Z-118ZD

SAFETY SHOES



Main Function: Anti-puncture+Electrical insulation
Vamp: Anti-fur leather+ mesh
Sole: PU+PU
Inner: Widen plastic-steel toe
Other Functions: Anti-slip+oil resistance+acid and alkali resistance
Standard: Conform to GB/EN
King safety shoes



TLX-A-112Z

SAFETY SHOES



Main Function: Anti-puncture
Vamp: First layer buffalo leather
Sole: Rubber outsole
Inner: Steel toe cap
Other Functions: Anti-slip+oil resistance+acid and alkali resistance
Standard: Conform to GB/EN
King safety shoes



TLX-Z-125ZCJ

SAFETY SHOES



Main Function: Anti-puncture. Electrical insulation
Vamp: Imported Shuyou leather
Sole: PU+PU
Inner: Widen plastic-steel toe+Anti-puncture cloth
Other Functions: Anti-slip+oil resistance+ acid and alkali resistance
Standard: Conform to GB/EN
King safety shoes



TLX-A-112ZC

SAFETY SHOES



Main Function: Anti-puncture+Anti-smashing
Vamp: First layer buffalo leather
Sole: Rubber outsole
Inner: Steel toe cap+Anti-stab steel plate
Other Functions: Anti-slip+oil resistance+acid and alkali resistance
Standard: Conform to GB/EN
Anta safety shoes



TLX-A-113Z

SAFETY SHOES



Main Function:Anti-puncture
Vamp:Small litchi punching leather
Sole:PU layer
Inner:Steel toe cap
Other Functions:Anti-slip+oil resistance+acid and alkali resistance
Standard: Conform to GB/EN
Anta safety shoes



TLX-A-114Z

SAFETY SHOES



Main Function:Anti-puncture
Vamp:Small litchi punching leather
Sole:PU layer
Inner:Steel toe cap
Other Functions:Anti-slip+oil resistance+acid and alkali resistance
Standard:Conform to GB/EN
Anta safety shoes



TLX-A-113ZC

SAFETY SHOES



Main Function:Anti-puncture+Anti-smashing
Vamp:Small litchi punching leather
Sole:PU layer
Inner:Steel toe cap+Anti-stab steel plate
Other Functions:Anti-slip+oil resistance+acid and alkali resistance
Standard:Conform to GB/EN
Anta safety shoes



TLX-A-114ZC

SAFETY SHOES



Main Function:Anti-puncture+Anti-smashing
Vamp:First layer buffalo leather
Sole:Rubber outsole
Inner:Steel toe cap+Anti-stab steel plate
Other Functions:Anti-slip+oil resistance+acid and alkali resistance
Standard:Conform to GB/EN
Anta safety shoes



TLX-A-115Z

SAFETY SHOES



Main Function: Anti-puncture
Vamp: First layer buffalo leather
Sole: Rubber outsole
Inner: Steel toe cap
Other Functions: Anti-slip+oil resistance+acid and alkali resistance
Standard: Conform to GB/EN
Anta safety shoes



TLX-A-115ZC

SAFETY SHOES



Main Function: Anti-puncture+Anti-smashing
Vamp: First layer buffalo leather
Sole: Rubber outsole
Inner: Steel toe cap+Anti-stab steel plate
Other Functions: Anti-slip+oil resistance+acid and alkali resistance
Standard: Conform to GB/EN
Anta safety shoes



Reflective Vest Series



TLY-F-001

DOUBLE LINE HIGH REFLECTIVE VEST



Size(mm):590*670

Adoptable Crowd:Construction workers, traffic and transportation departments, traffic commanders, traffic policeman, sanitation personnels, etc.

Product Using Range:High-reflective plays the role of alerting and protecting the safety of operating personnels.

Fabric:120G knitted low elastic fabric, highlight the second category

Color:Fluorescent Yellow

Structure:Zipper, double reflective line

TLY-F-003

DOUBLE LINE HIGH REFLECTIVE VEST



Size (mm):590*690

Adoptable Crowd:Construction workers, traffic and transportation department, traffic commanders, traffic policeman, sanitation personnel, etc.

Product Using Range:High-reflective plays the role of alerting and protecting the safety of operating personnels.


Fabric:Mesh+High reflective line

Color: Upper:yellow; bottom:blue

Structure:Zipper, double reflective line

TLY-F-002

WELL LINE HIGH REFLECTIVE VEST

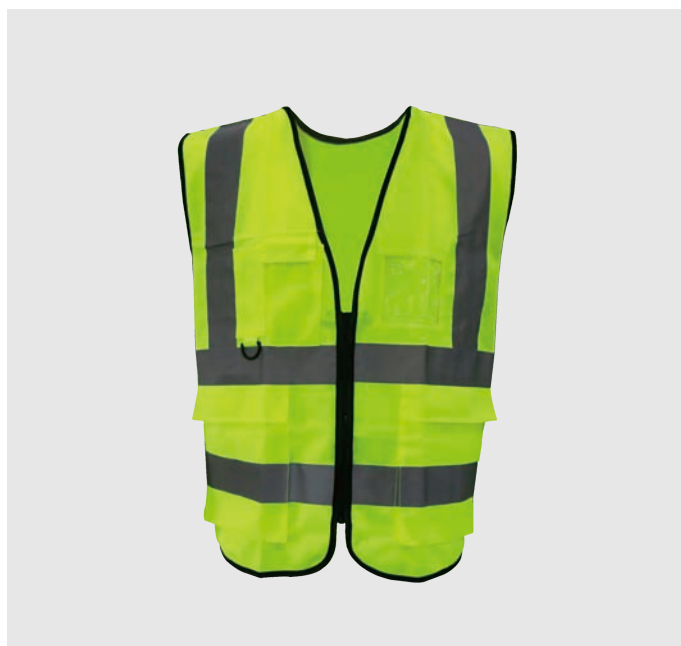

Size(mm):590*690

Adoptable Crowd:Construction workers, traffic and transportation departments, traffic commanders, traffic policeman, sanitation personnels, etc.

Product Using Range:High-reflective plays the role of alerting and protecting the safety of operating personnels.

Fabric:120G knitted low elastic fabric, highlight the second category

Color:Fluorescent yellow

Structure:Zipper, well line reflective line

TLY-F-006

DOUBLE LINE HIGH REFLECTIVE VEST (WITH POCKET)



Size (mm):590*670

Adoptable Crowd:Construction workers, traffic and transportation department, traffic commanders, traffic policeman, sanitation personnel, etc.

Product Using Range:High-reflective plays the role of alerting and protecting the safety of operating personnels.

Fabric:120G knitted low elastic fabric, highlight the second category

Color:Fluorescent yellow

Structure:Zipper, double reflective line

TLY-F-008

WELL LINE HIGH REFLECTIVE VEST



Size (mm):590*690
Adoptable Crowd:Construction workers, traffic and transportation department, traffic commanders, traffic policeman, sanitation personnel, etc.
Product Using Range:High-reflective plays the role of alerting and protecting the safety of operating personnels.
Fabric:120G knitted low elastic fabric, highlight the second category
Color:Fluorescent orange
Structure:Zipper, well reflective line

TLF-012

DOUBLE LINE HIGH REFLECTIVE VEST



Size (mm):590*670
Adoptable Crowd:Construction workers, traffic and transportation departments, traffic commanders, traffic policeman, sanitation personnels, etc.
Product Using Range:High-reflective plays the role of alerting and protecting the safety of operating personnels.
Fabric:Peach-type mesh+highlight type II
Color:Fluorescent Yellow
Structure:Zipper, double reflective line





Jacket Series



TLY1-001

JACKET PRODUCTS



Material:

- 1 Fabric:Using 228 Tar velvet (Taslan) breathable silk 300 and conform to the national standard;
- 2 Inside:Using 80G big body single layer network;
- 3 Liner:Using 6,000 polar fleece 275G of 4-class and reaching the national standard;

Design:

Easily disassembled external, inside and cap make your clothes match with different temperatures well.

Color:Orange+dark gray

TLY1-002

JACKET PRODUCTS



Material:

- 1 Fabric:Using 228 Tar velvet (Taslan) breathable silk 300 and conform to the national standard;
- 2 Inside:Using 80G big body single layer network;
- 3 Liner:Using 6,000 polar fleece 275G of 4-class and reaching the national standard;

Design:

Easily disassembled external, inside and cap make your clothes match with different temperatures well.

Color:Green+Medium Grey

TLY1-001

JACKET PRODUCTS



Material:

- 1.Fabric:using 228 Tar velvet (Taslan) breathable silk 300 and conform to the national standard;
- 2.Inside:using 80G big body single layer network;
- 3.Liner:using 6,000 polar fleece 275G of 4-class and reaching the national standard;

Design:

Easily disassembled external, internal and cap make your clothes match with different temperatures well.

Color:Blue+denim blue

01



External and internal with locking buckle for good warmth

02




Adopting velcro and metal buckle closure for durable using

03



Easily disassembled external and external make clothes free collection

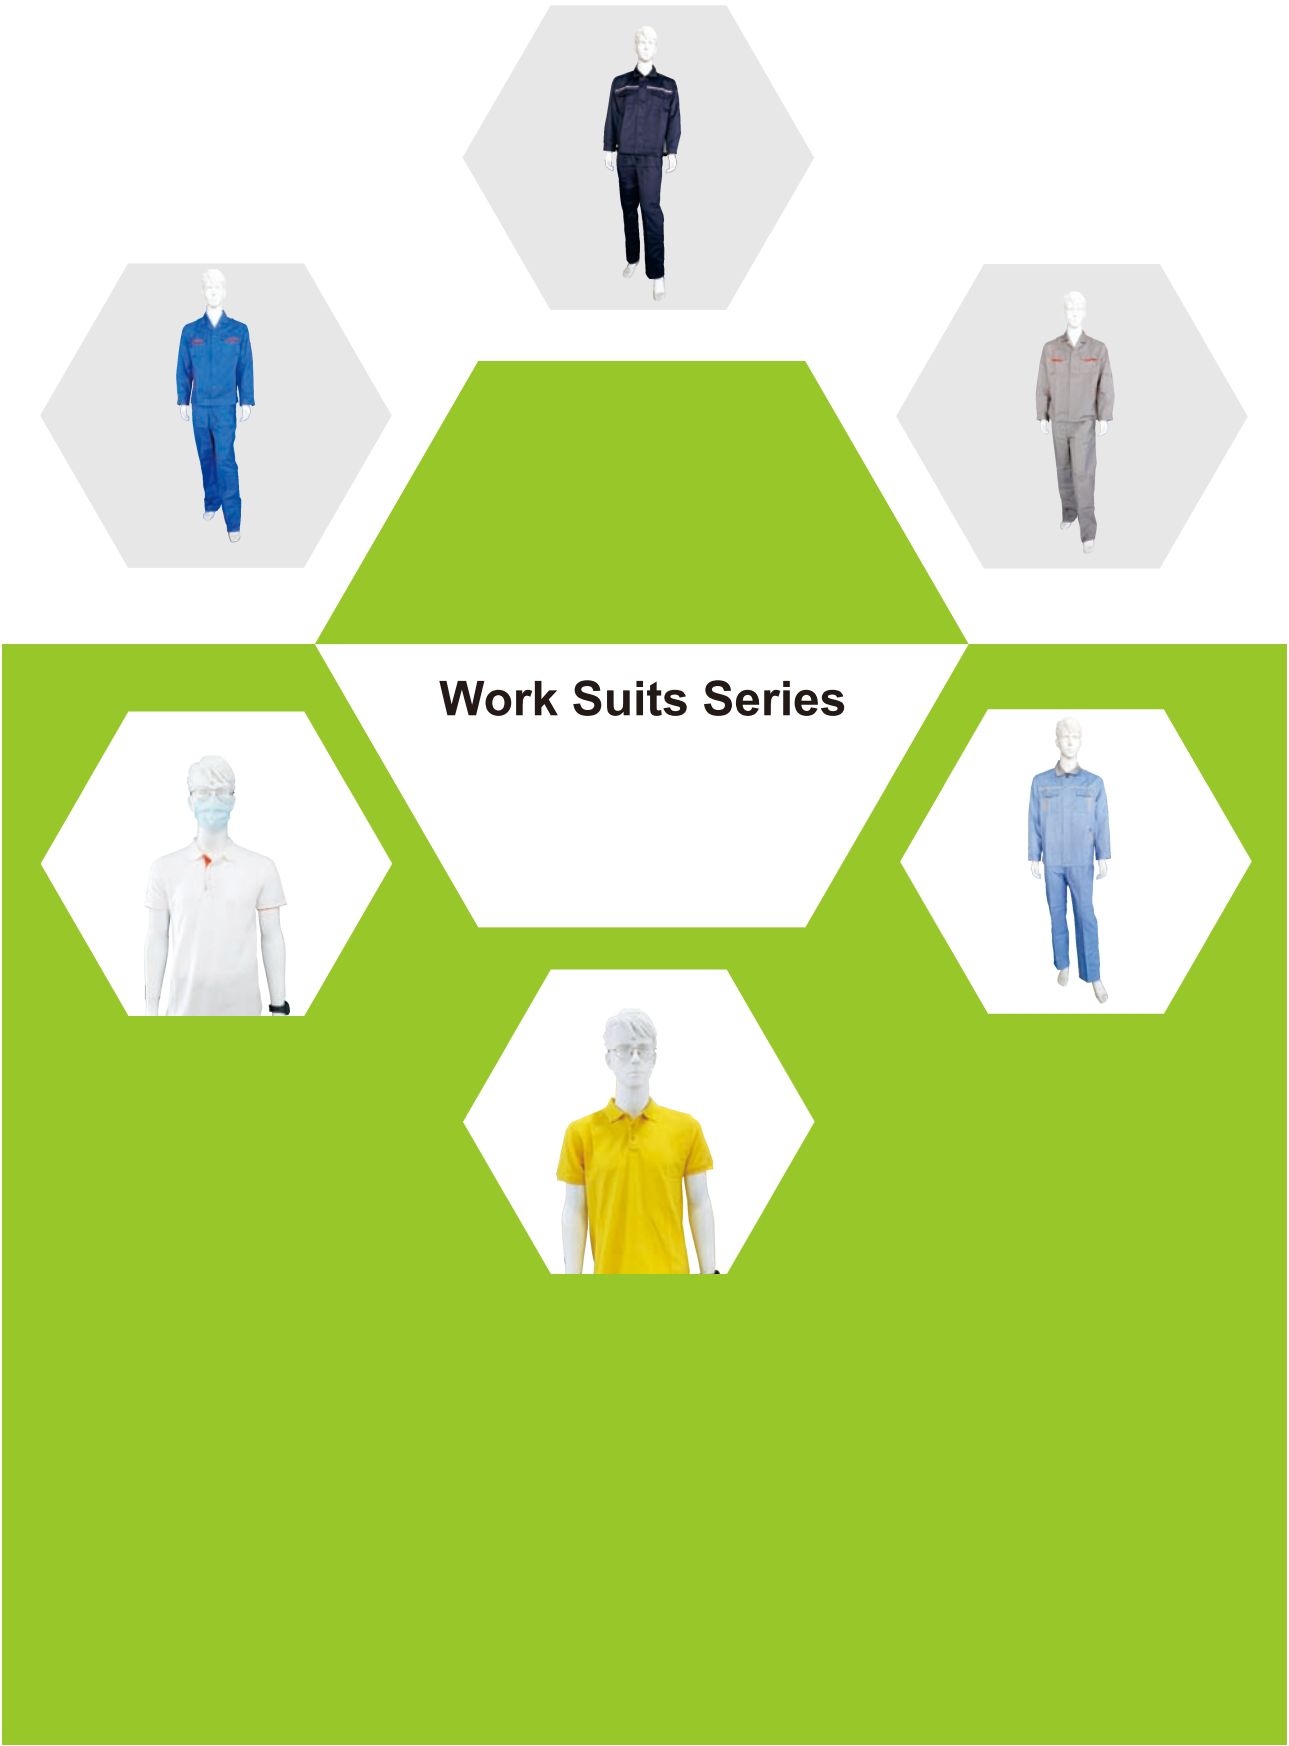

TLGY-011

LONG SLEEVE WORK CLOTHES



Color:Orange, light gray, khaki, royal blue (other colors need to be customized)

Material: anti-static CVC yarn+ cotton

Other custom requirements can be consulted offline

TLGY-021

LONG SLEEVE WORK CLOTHES



Color:Light gray, Army green, Royal blue, Dark gray, Post and telecommunications green, Tibetan blue (other colors need to be customized)

Other custom requirements can be consulted offline

TLGY-022

LONG SLEEVE WORK CLOTHES



Color:Dark gray, red, royal blue, navy blue (other colors need to be customized)
Material:Cotton+Polyester
Other custom requirements can be consulted offline

TLGY-027

LONG SLEEVE WORK CLOTHES



Light gray, royal blue, light blue, navy blue, red, other colors need to be customized
Other custom requirements can be consulted offline

TLGY-039

SHORT SLEEVE WORK CLOTHES



Color:Bright Red、Banana Yellow、Black、White、Orange、Heather Grey、Enamel Blue、Dark Blue、Sky-Blue、Lake Blue、Bright Green、Peach Red、Light Pink、Dark Purple.
Material:La-coste mesh fabric,100% eco-friendly virgin cotton,100% combed cotton without ball,Reactive dyeing without fading.
Other customized requirements can be consulted offline.

TLGY-033

SHORT SLEEVE WORK CLOTHES

Color:White+Orange, White+Enamel Blue,
Orange+White, Peach Red+Pink, Black+Bright
Red, Black+Lake Blue, Grey+Peach Red, Navy
Blue+Yellow, Mint Green+Navy Blue, Enamel
Blue+Mint Green.
Material:La-coste, Contains 70% cotton and 30%
polyester
Other customized requirements can be consulted
offline.



TLMZ-001

HAND-HELD ELECTRIC WELDER'S HELMET



Material:PE

Color:Yellow

Size:230*130*440mm

Net Weight:235 grams

Decomposition Instructions:

- 1.With high flame retardancy and opacity to avoid the harmful radiation generated by the arc and to prevent the occurrence of electro-optic ophthalmia,Impact resistance and pressure resistance are better.
- 2.Durable and protective for the face and head from injuring by spark.
- 3.Suitable for welding, cutting, gas cutting and other protective operations.

TLMZ-002

WEARING ELECTRIC WELDER'S HELMET



Material: PE

Color: Yellow

Size: 200*180*290mm

Net Weight: 378 grams

Decomposition instructions:

- 1. With better impact and pressure resistance. The goggles clamshell design can avoid the arc of harmful radiation well by the arc, to prevent the occurrence of electro-optic ophthalmia.
- 2.Durable and protective for the face and head from injuring by spark.
- 3.Suitable for welding, cutting, gas cutting and other protective operations.
- 4.Ratchet headband with sweatband makes your wearing more comfortable.

Safety Belt Series



TLD-001

PROTECTIVE SAFETY BELT SERIES



Function:Falling prevention at height
Static Tension (Main materials and accessories):
Safety Belt:15KN Safety rope:20KN
Material(including accessories):
Safety Belt:High-strength polypropylene
Safety Rope:High-tenacity polyester
Bearing Capacity (Main materials and accessories):
Safety Belt:1.5 Ton Safety rope:2.0 Ton
Steel Hook:Double casting alloy steel hooks

TLD-002

PROTECTIVE SAFETY BELT SERIES



Function:Falling prevention at height
Static Tension (Main materials and accessories):
Safety belt:28KN Safety rope:35KN
Material(including accessories):
Safety Belt:high-tenacity polyester
Safety ope:high-tenacity polyester
Bearing Capacity (Main materials and accessories):
Safety Belt:2.8 Ton Safety rope:3.5 Ton
Steel Hook:Double casting heat-treatable alloy steel hooks

TLD-003

PROTECTIVE SAFETY BELT SERIES



Function: High-altitude anti-fall
Material: (including accessories) high-strength polyester+high-strength Dyneema
Bearing:1.5T
Steel hook:cast alloy copper steel hook



Protective Gloves Series



TLS-H001-W

MULTI-FUNCTION GLOVES



Material:Second core skin of cattle

Length:24cm

Width:10.5cm(L) 11.5cm(XL)

Advantages:Made by high quality soft leather, with good appearance, good feeling and flexible operation features. Good option for carrying, cutting, driving and mild welding operations.



TLS-H003

WELDING GLOVES



Material:Second layer of cattle neck skin

Length:45cm

Width:15cm

Advantages:Made by fire retardant and heat insulation performance leather. With red protective edge line design or good appearance, durable pure cotton inside for good feeling and easy to absorb sweat, long pattern, full protection and economic features.



TLS-H002

WELDING GLOVES



Material:Second layer of cattle neck skin

Length:34cm

Width:13.5cm(L) 14.5cm(XL)

Advantages:Made by fire retardant and heat insulation performance leather, pure cotton inside. With feature of absorbing sweat for good feeling, red protective edge line design for good appearance, durable and economic for your option.



TLS-H004

WELDING GLOVES



Material:Second layer of cattle neck skin

Leather+DuPont KEVLAR fire protection line 3

Length:34cm

Width:14cm(L) 15cm(XL)

Advantages:Made by fire retardant and heat insulation performance leather, pure cotton inside, straight fingers design. With orange red color for good appearance, comfortable, good feeling of absorbing sweat, economic and 95% protective line features.



TLS-H005

ARGON WELDING GLOVES



Material:Second layer of cattle neck skin +DuPont KEVLAR fire protection line 3

Length:24cm

Width:11.5cm

Advantages:The back of hand enhance the resistance to thermal radiation affect, with seamless forefinger design which ensure smoothly wire feed and good feeling features.



TLS-H008

WORKING GLOVES



Material:Second layer of cow skin

Length:23.5cm

Width:12.5cm

Advantages:Made by soft leather, convenient and flexible when in using.



TLS-H006

FLAME WELDING GLOVES



Material:Second layer of cattle neck skin +DuPont KEVLAR fire protection line 3

Length:35cm

Width:13.5cm(L) 14.5cm(XL)

Advantages:Soft inner-sole with fire retardant and sparks prevention can enhance the protection. With the features of absorbing sweat, thermal insulation, durable, anti-friction, soft, 95% protective line .



TLS-010

WORKING GLOVES



Material:thick soft rubber

Length:24cm

Width:15cm

Advantages:good non-slip property, light weight



TLS-011

WORKING GLOVES




Material:wear-resistant film
Length:25cm
Width:11cm
Advantages:Good abrasion resistance, and certain slip resistance



TLFHT-001


ANTI-SLIP TAPE

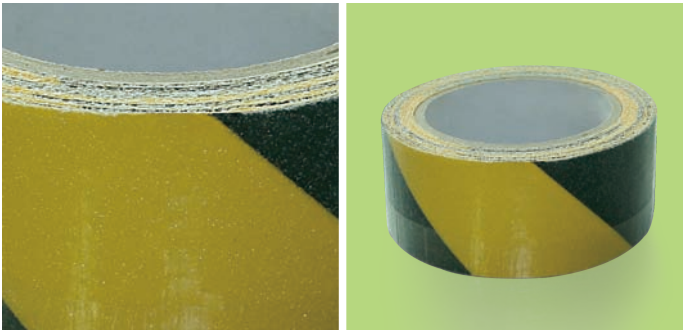

Function:Floor anti-slip
Applicable Temperature:-40 degree centigrade~120 degree centigrade
Material:PET base material
Surface:Emery
Size:50mm*5m
Color:Black+Yellow
Applicable Using Range:Suitable for any location and supplies that require slippage due to moisture, smoothness, oil, and special protection

TLFHT-002

ANTI-SLIP TAPE

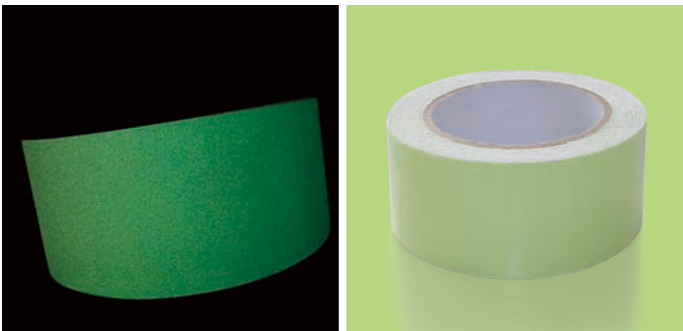

Function:Floor anti-slip
Applicable Temperature:-40 degree centigrade~75 degree centigrade
Material:PET base material+fluorescent agent
Surface:Emery
Size:50mm*5m
Color:Green
Applicable Using Range:Suitable for any location and supplies that require slippage due to moisture, smoothness, oil, and special protection

TLFHT-003

ANTI-SLIP TAPE



Function:Floor anti-slip
Applicable Temperature:-40 degree centigrade~75 degree centigrade
Material:Transparent PET back mold
Surface:PEVA
Size:25.4mm*5m
Color:Transparent
Applicable Using Range:Suitable for any location and supplies that require slippage due to moisture, smoothness, oil, and special protection



TLB-001

WORK PACKAGE SERIES



Material:

- 1.Fabric:Using 228 Tar velvet (Taslan) breathable silk 300 and conform to the national standard;
- 2.Inside:Using 80G big body single layer network;
- 3.Liner:Using 6,000 polar fleece 275G of 4-class and reaching the national standard;

Design:

Easily disassembled external, inside and cap make your clothes match with different temperatures well.

Color:Green+Medium Grey



TLB-002

WORK PACKAGE SERIES



Capacity:laptop, clothes, documents, tools, debris

Features:Shoulder, mention carry soft parts

Shape:Rectangle

Size:340*470*170

Fabric:Polyester material, elastic back pad

Color:Black

Load:13KG

Structure:The main compartment, computer bag, storage bags on both sides, net bag, zipper pocket



TLY1-002

WORK PACKAGE SERIES



Capacity:laptop, clothes, documents, tools, debris

Features:Shoulder, mention carry soft parts

Shape:Rectangle/Size:340*470*170

Color:Blue/Load:13KG

Fabric:Polyester material, elastic back pad

Structure:The main compartment, computer bag, storage bags on both sides, net bag, zipper pocket

01



Hidden Zip Pouch:Additional concealed zip pocket at sides for umbrellas and cups, etc

Waterproof Fabrics:The preferred fine fabrics with the features of waterproof and tear resistance

Hanging Sleeve Design:Integrated trolley case design and fixed backpack

Ergonomic Design:S-type thick straps, high-quality air diversion system and solid pendant design

02



Comfortable Handle:Additional PU pad material for handle makes the bag body crisp perfectly

Square Design:The appearance looks more tough and stiff

03



Large-capacity Multi-function:The multi-pocket design can contain the PC, makes office documents, tools have their own place by sequence.

04



Wear-resistant bottom pad:skid resistance bottom, wear-resistant design can reduce the bottom from broken efficiently.



TLJ-001

PROTECTIVE GLASSES



Material of Glasses Lens:PC lens
Material of Glasses Frame:Nylon
Color:Blue
Main Function:Anti-shock; anti-splash; anti-light
chemicals



Protective Glasses
Series





Protective Respirator Series



TLK-001

PROTECTIVE RESPIRATOR (HEAD-MOUNTED)



Material:Double non-woven (surface 50G, bottom 30G) activated carbon, breathable valve

Color:Gray

Size:110*150mm

Standard:Meet KN95/GB2626-2006

- Function:
- 1.Self-absorption filter-type:anti-particulate matter, dust-proof, anti-PM 2.5;
 - 2.Folding, sponge with nose pad design, absorbent sweat & flexible, light weight and easy to use;
 - 3.High-elastic rubber band, soft lining, comfortable to wear;
 - 4.Activated carbon cloth to remove odor.

TLK-002

PROTECTIVE RESPIRATOR(EAR-MOUNTED)



Material:Double non-woven (surface 50G, bottom 30G) activated carbon, breathable valve

Color:Gray

Size:110*150mm

Standard:Meet KN95/GB2626-2006

- Function:
- 1.Self-absorption filter-type:anti-particulate matter, dust-proof, anti-PM 2.5;
 - 2.Folding, sponge with nose pad design, absorbent sweat & flexible, light weight and easy to use;
 - 3.High-elastic rubber band, soft lining, comfortable to wear;
 - 4.Activated carbon cloth to remove odor.

Earplug Series Products

TLE-001

EARPLUG




Function:anti-noise
Color:light green
Shape:Bullet
Material:PU

TLE-002

EARPLUG



Function:anti-noise
Color:green
Shape:Christmas tree type
Material:TPE

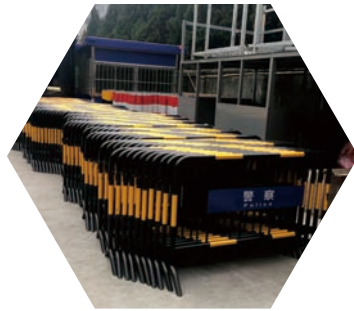

**Transportation
facilities products**




Design articles


Parking lot drawing design






Parking lot wall design

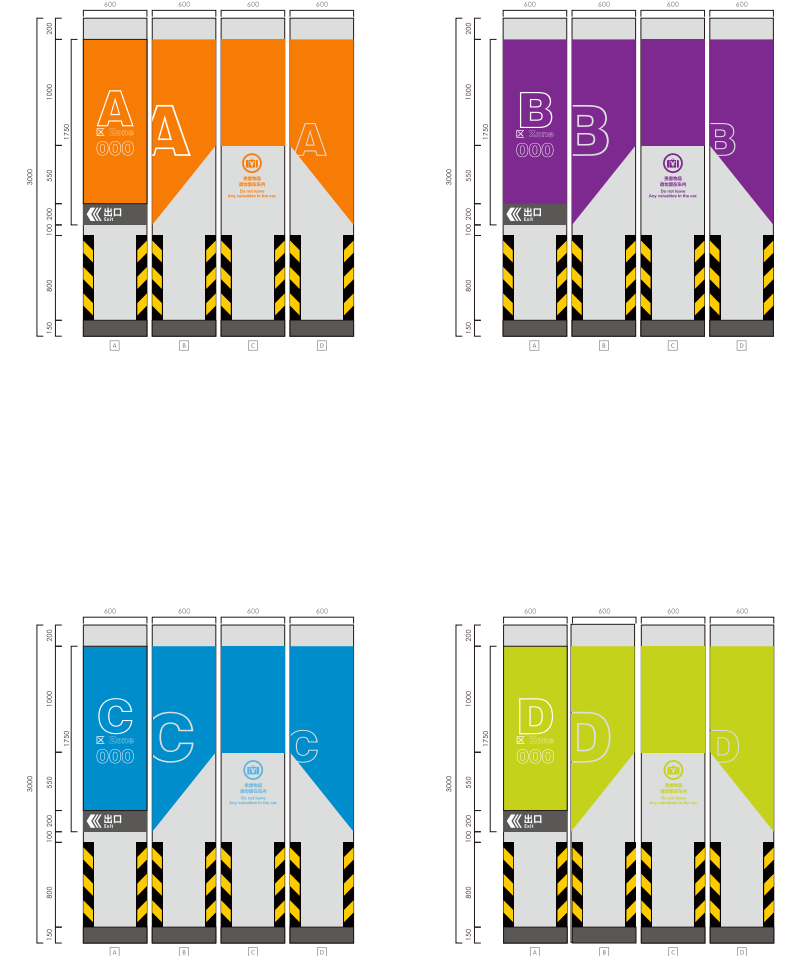

wall design

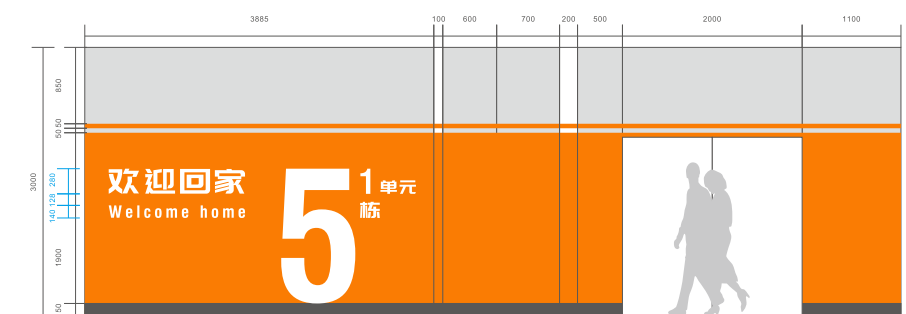

3D rendering design of parking lot

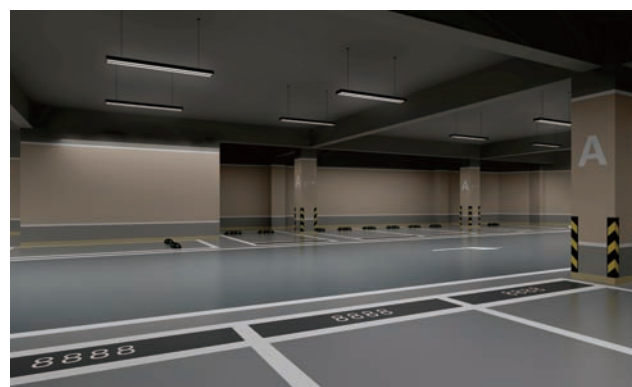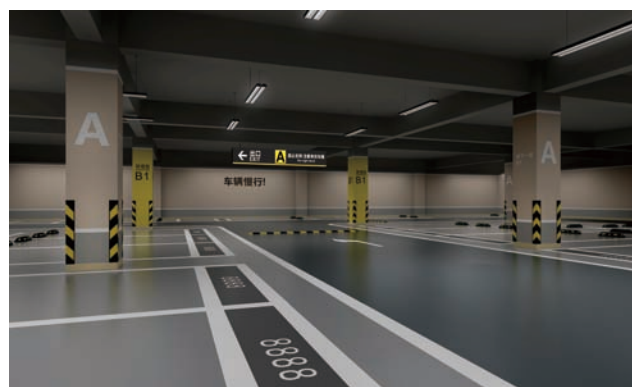
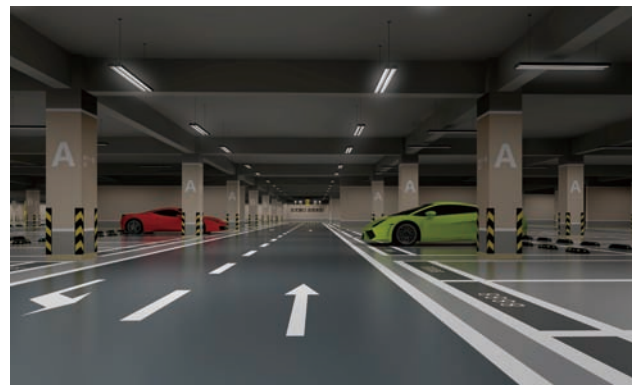


Product reviews



High-speed rail station light box series



Underground parking light box series

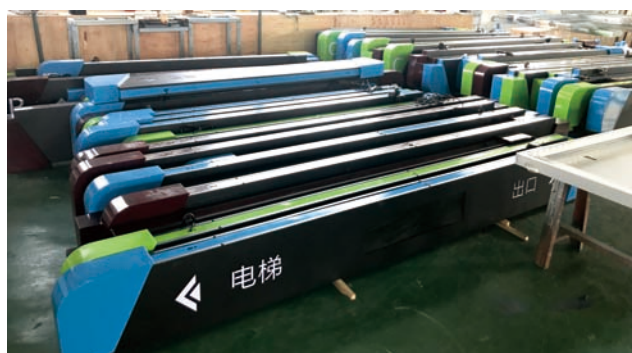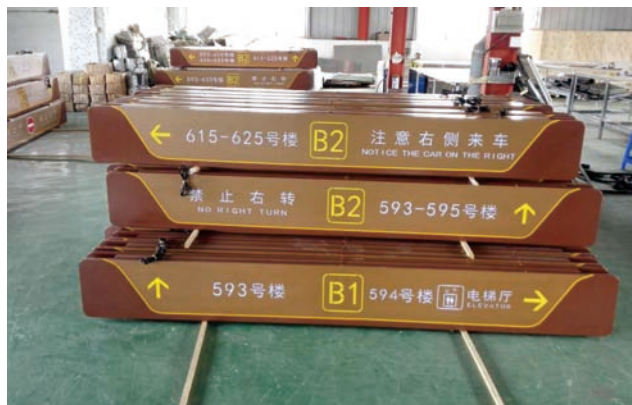

Vertical light box

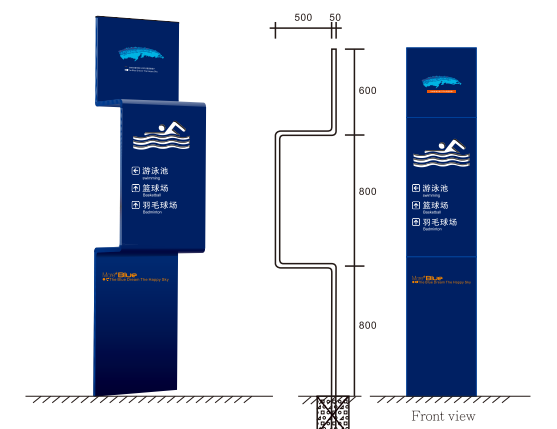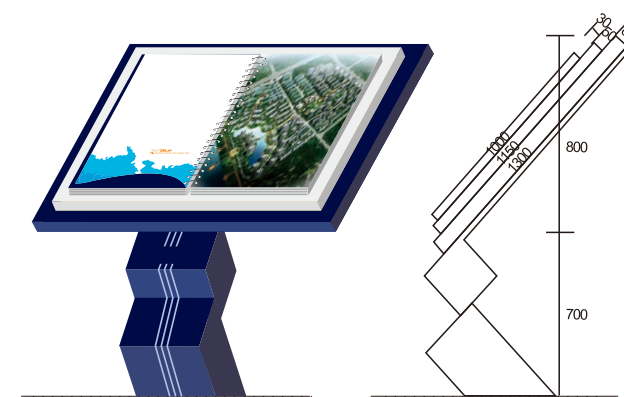

Prohibition Signature



Specifications: 600mm/800mm/1000mm/1200mm
Sign material: National standard aluminum plate with engineering grade reflective film

Warning Signature



specification: 700mm/900mm/1000mm
Sign material: International aluminum plate with engineering grade reflective film

Road construction safety sign



straight



Turn left



Turn right



Go straight and turn left



Go straight and turn right



Turn left and turn right



U turn




Go straight and turn left and turn right



cross straight and turn left



cross straight and turn right



Right exit



Go straight to the exit



Left exit



Stop sign



入口



road work Ahead




road closed



right road closed




Left rod closed



Avoid lane



This road is closed

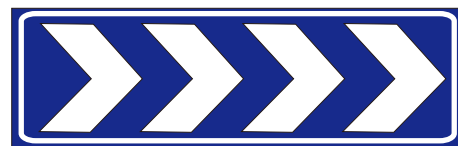


Guide




Crosswalk




Motorway



Non-motor vehicle lane



Divided driving lane




Bus lane

Specifications: 1200X400mm

Sign material: National standard aluminum plate with engineering grade reflective film

RUBBER DECELERATION SLOPE SERIES

TRANSPORTATION FACILITIES

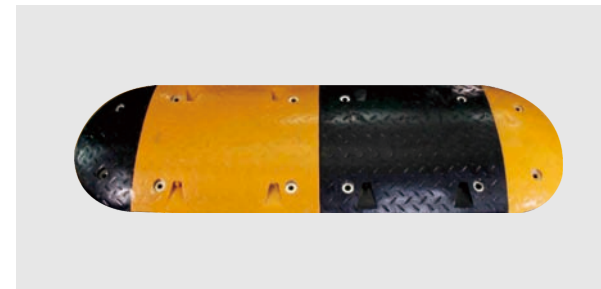

Name:Large arc deceleration slope (high quality)

Model:TLJT-JSPOI

Specifications:500X460X70mm

Material:High-quality rubber

Application:highway toll station, industrial area, dock, garden community



Name:Trapezoid deceleration slope

Model:TLJT-JSP02

Specification:250X340X50mm

Material:Rubber

Application:industrial area, garden area




Name:Trapezoid deceleration slope (high quality)

Model:TLJT-JSP02-A

Specifications:250X315X45mm

Material:High-quality rubber

Application:highway toll station, industrial area, dock, garden community

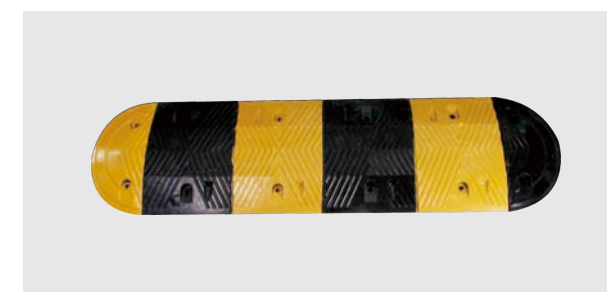


Name:Trapezoid deceleration slope

Model:TUJT-JSP02-B

Specification:250X350X50mm

Material:Rubber

Application:industrial area, garden area

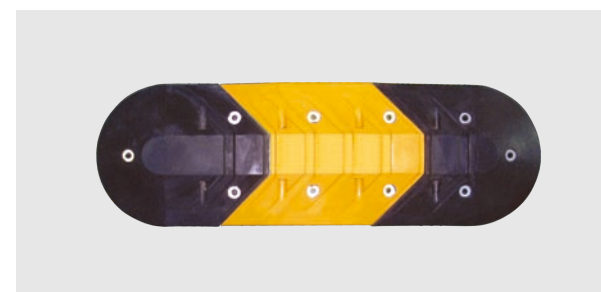

Name:Fishtail Speed Decline

Model:TLJT-JSP03

Specification:400X380X65mm

Material:High-quality rubber

Application:industrial area, garden small



Name:Streamlined Speed Decline

Model:TLJT-JSP04

Specification:370X500X50mm

Material:Rubber

Application:industrial area, garden area



Name: Colored trapezoidal deceleration slope
Model: TLJT-JSP06
Specifications: 500X300X30mm
Material: PE environmental protection material
Application: industrial area, garden, community




Name: Streamlined deceleration slope (high quality)
Model: TUJT-JSP08
Specifications: 500X350X45mm
Material: High-quality rubber
Application: highway toll station, industrial area, dock, garden community




Name: Linear deceleration slope (high quality)
Model: TLJT-JSP09
Specifications: 500X100X20mm
Material: High-quality rubber
Application: golf course



Name: streamline deceleration slope (high quality)
Model: TLJT-JSP11
Specifications: 500X300X35mm
Material: High-quality rubber
Application: industrial area, garden, community

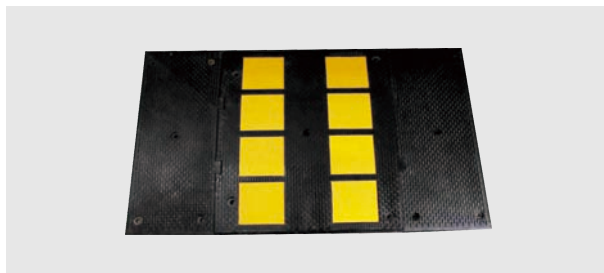

Name: Reflective deceleration slope
Model: TLJT-JSP12
Specifications: 470X600X35mm
Material: rubber
Application: hospital, road

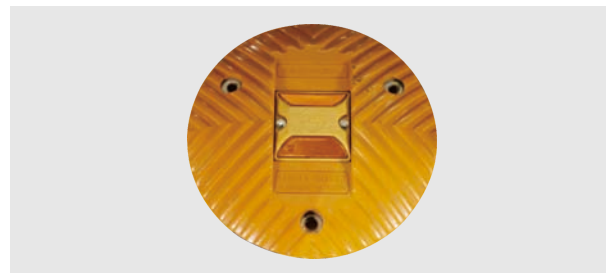


Name: circular deceleration slope
Model: TLJT-JSP15
Specifications: Φ350X15mm
Material: high quality rubber
Application: airport, Toll gate



Name: Rubber retarded skid plate
Model: TUJT-JZB13
Specifications: 1000X800X50mm
Material: rubber
Application: Industrial area, road


RECOMMENDED STRAIGHT CORNER PROTECTION

TRANSPORTATION FACILITIES

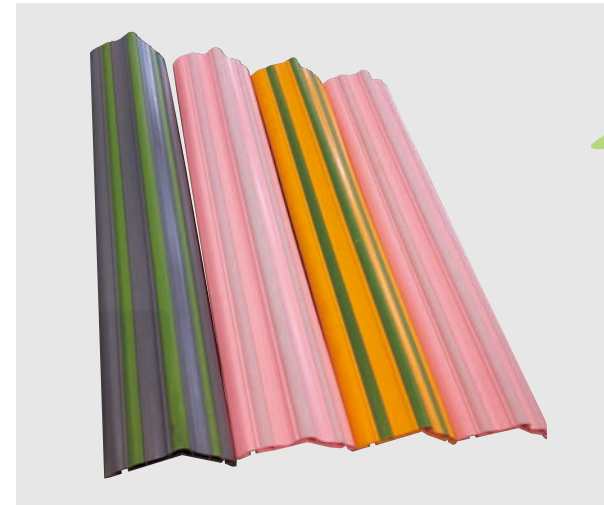


Features
environmentally friendly materials, no odor, self-luminous, safer, convenient card slot installation

Name: TPU Self-illuminating corner protector
Model: TLJT-HJ03
Specifications: 600X200X10mm/800X200X10mm/1000X200X10mm
Material: TPU

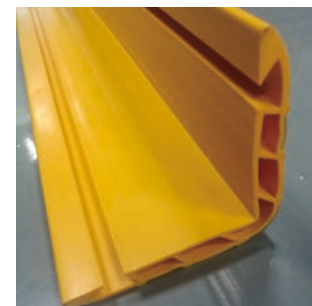

Name: Polymer rubber corner protector Specification: 800X200X7mm Material: Compliant with rubber

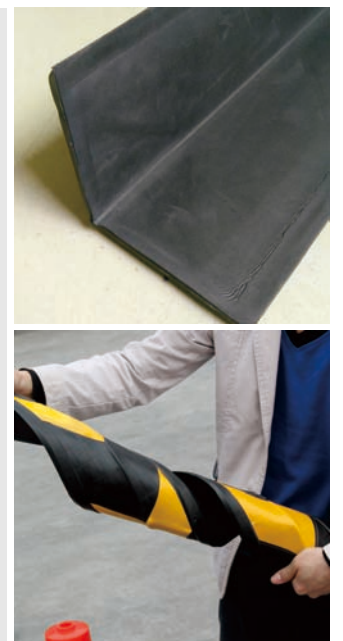

Name:Round retaining wall corner
Model:TLJT-HJ02
Specification:560X200X10mm/8mm
Material:rubber



TLJT-HJ02

Name:Round retaining wall corner
Model:TLJT-HJ02-A
Specifications:800X200X8mm
Material:rubber



TLJT-HJ02-A



Application example of round retaining wall corner

Name:Round retaining wall corner
Model:TLJT-HJ02-XS
Specification:800X200X8mm
Material:rubber/Rubber plasti



TLJT-HJ02-XS

Name:Straight corner protector
Model:TLJT-HJ01-LB
Specifications:800X200X1.2mm
Material:Aluminum plate



TLJT-HJ01-LB



直护墙角应用实例(铝板)

Name:straight wall corner
Model:TLJT-HJ01
Specification:800X200X7/800X200X5mm
Material:rubber/Rubber plastic



TLJT-HJ01

Name:Straight corner wall protector
Model:TLJT-HJ01-A
Specifications:1000X300X8mm
Material:rubber/Rubber plastic



TLJT-HJ01-A



Application example of Straight corner protector

Name:Frosted round corner
Model:TLJT-HJ02-MS
Specifications:560X200X10/800X200X10mm
Material:rubber




TLJT-HJ02-MS



Application example of round retaining wall corner

RECOMMENDED LOCATOR

TRANSPORTATION FACILITIES

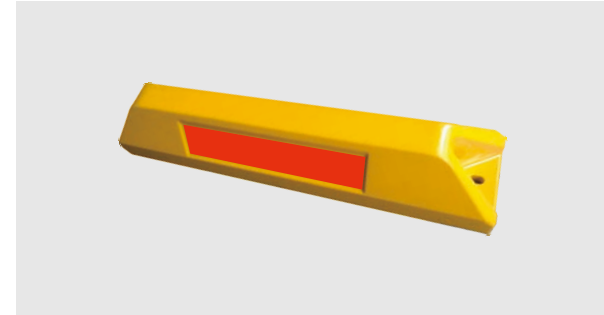

Name:Die-casting aluminum positioner
Model:TUJT-DWQ04
Specification:550X120X100mm
Material:Aluminum alloy paint
Application:parking spaces



Name:Wheel locator
Model:TUJT-DWQ09
Specification:2000X160X120mm
Material: Flexible rubber
Application:parking spaces



Name:Wheel locator (high quality)
Model:TLJT-DWQ01-XJ
Specification:560X160X110mm
Material:High-quality rubber
Application:parking spaces



Name:Wheel locator
Model:TUJT-DWQ02-DQ
Specification:600X160X100mm
Material:NBR
Application:parking spaces



Name:Wheel locator
Model:TLJT-DWQ03
Specification:1120X300X200mm
Material:rubber
Application:For large vehicles



Name:Wheel locator
Model:TLJT-DWQ01-MS
Specification:800X160X110mm
Material:rubber
Application:parking spaces



Name: Wheel locator
Model: TLJT-DWQ05
Specification: 2000X160X100mm
Material: Rubber and Plastic
Application: parking spaces



Name: Wheel locator
Model: TUT-DWQ06
Specification: 560X160X110mm
Material: Rubber
Application: parking spaces



Name: PE wheel aligner
Model: TLJT-DWQ08
Specification: 560X160X110mm
Material: PE environmental protection material
Application: parking spaces



Name: Road side slop
Model: TLJT-DWQ13-YP
Specification: 500X200X140mm
Material: Rubber
Application: For roadside



Name: Road side slope
Model: TLJT-DWQ14-YP
Specification: 300X490X90mm
Material: Rubber
Application: For roadside



Name: Anti-crash block
Model: TLJT-DWQ07
Specification: 325X295X100mm
Material: Rubber
Application: Dock, industrial area, unloading area



Name: Anti -crash block
Model: TLJT-DWQ14-YP
Specification: 325X295X100mm
Material: Rubber
Application: Dock, industrial area, unloading area



Name: Anti -crash block
Model: TLJT-FZ02
Specification: 300X280X100mm
Material: synthetic rubber
Application: Dock, industrial area, unloading area



Name: Pier anti-collision glue
Model: TLJT-FZ02-MT
Specification: 1000X200X190mm
Material: High quality Rubber
Application: Port, Dock



Name: Wheel stop block
Model: TLJT-ZHQ01
Specification: 240X180X120mm
Material: rubber
Application: Dedicated parking



Project case

Features: anti-corrosion, pressure resistance, easy installation, non-injury to tires, recyclable.

WHEEL BLOCK SEAT SERIES

TRANSPORTATION FACILITIES



Name:Color zinc steel parking wheel block (three screw holes)
Model:TLJT-DLZOI-G
Specification:φ60/φ76/φ89
Material:Steel
Application:parking spaces



Name:Perforation in the middle of the parking wheel block (three screw holes)
Model:TLJT-3TJ01-ZJ
Specifications:φ60/φ76/φ89
Material:cast iron
Application:parking spaces



Name:Car Parking Block (Three Screw Holes) Head
Model:TLJT-3TJ01-ZY
Specification:φ60/φ76/φ89
Material:cast iron
Application:parking spaces



Name:Perforation in the middle of the parking wheel block (four screw holes)
Model:TLJT-4TJ01-ZJ
Specifications:φ60/φ76/φ89
Material:cast iron
Application:parking spaces



Name:Car parking wheel seat (four screw holes)
Model:TLJT-4TJ01-ZY
Specification:φ60/φ76/φ89
Material:cast iron
Application:parking spaces



Name:Car parking wheel rod
Model:TLJT-4TJ01-ZY
Specification:φ60X2000mm/φ76X2000mm/φ89X2000mm
Material:Silver-zinc steel pipe, high-pressure spraying, and engineering-grade reflective film
Application:parking spaces



Name:Welded parking wheel
Model:TLJT-DLGOI
Specifications:φ60X2000mm/φ76X2000mm/φ89X2000mm
Material:mirror zinc steel pipe, high pressure spray coating, engineering grade reflective film
Application:parking spaces



Name:Profile steel wheel aligner
Model:TLJT-DWQ15-XG
Specifications:600X100X95mm
Material:Low carbon steel paint
Application:parking spaces



Name:Torx steel wheel aligner
Model:TLJT-DWQ16-MG
Specifications:600X76X100mm
Material:Low carbon steel paint
Application:parking spaces



Name:Locator for bus and truck
Model:TLJT-DWQ16-GZ
Specifications:600X76X100mm
Material:Galvanized steel paint
Application:Bus station, botanical garden



Name:Locator for bus and truck
Model:TLJT-DWQ17-HC
Specifications:135X180X1000mm
Material:Low carbon steel paint
Application:Bus station, botanical garden



Name:Locator for bus and truck
Model:TLJT-DWQ18-HC
Specifications:200X180X1000mm
Material:Galvanized steel paint
Application:Bus station, botanical garden



Parking Block Wheel Application Example



Parking Block Wheel Application Example

Easy installation, long service life and fashionable style

TRAFFIC WIDE-ANGLE LENS SERIES

TRANSPORTATION FACILITIES



Name: Outdoor reflector Specification: $\phi 450 \times \phi 600 \times \phi 800 \text{mm}$ Material: PC/Acrylic




Name: Spherical mirror
Specification: 300mm radius
Material: PC/Acrylic

Name: Indoor reflector
Specification: $\phi 600$, $\phi 800$, $\phi 1000 \text{mm}$
Material: PC/Acrylic

Name: Square wide-angle lens
Specification: $400 \times 600 \text{mm}$
Material: PC/Acrylic

Application Reality

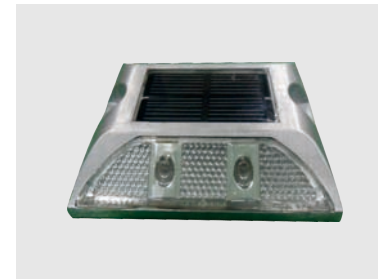

Name: Solar Road Stud
Model: TUJT-TYNDD01
Application: parking lot, road



Name: Solar Road Stud
Model: TLJT-TYNDD01-S3
Application: parking lot, road




Name: Glass spike
Model: TLJT-TYNDD04
Application: parking lot, road



Name: Cast aluminum flat bottom road nails (single-sided and no-angle)
Model: TLJT-DD01-TQ
Application: parking lot, road



Name: Plastic flat spike (Single-sided, yellow-white)
Model: TLJT-TYNDD02
Application: parking lot, road

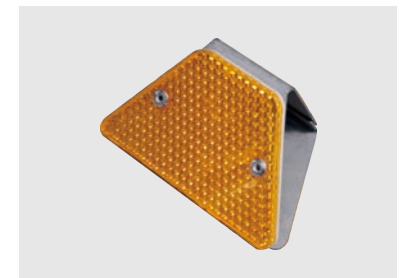

Name: Trapezoidal contour marker
Model: TLJT-LLB02-T
Specification: $120 \times 80 \text{mm}$
Application: parking lot, road



Name: Rectangle outline
Model: TLJT-LLB01-J
Specification: $180 \times 40 \text{mm}$
Application: parking lot, road



Name: Round outline
Model: TLJT-LLB03-Y
Specification: $80 \times 90 \text{mm}$
Application: parking lot, road

TRANSPORTATION FACILITIES SUPPORTING SERIES



Name: Anti-collision bucket
Specification: $\phi 600 \times 800 \text{mm}$
Material: FRP
Model: TLFZT-02
Application: road bifurcation



Name: Plastic warning chain
Material: rubber
Model: TLJL-01
Application: For warning isolation



Name: Road Dividing Light Box
Material: Plastic plus light source
Model: TLJT-FDX01
Application: Dedicated for road bifurcation guidance



Name: Body Reflective Sticker
Model: TUJT-CFG01
Material: reflective lattice
Specification: width 50mm, length 100mm
Application: reflective stickers for truck body night vision



Name: Water horse isolated
Specification: $1500 \times 650 \times 200 \text{mm}$
Material: PC rubber
Model: TLSM-01
Application: Dedicated for road bifurcation guidance



Name: Water horse isolated
Specification: $1300 \times 650 \times 200 \text{mm}$
Material: PC rubber
Model: TLSM-01
Application: Dedicated for road bifurcation guidance



Name: Simple triangle warning sign
Model: TLJT-SJJO1
Specifications: $\triangle 430 \text{mm}$
Application: Road vehicles in emergency situations



Name: Anti-collision bucket
specification: $\phi 600 \times 800 \text{mm}$
Material: FRP
Model: TLFZT-01
Application: road bifurcation

TRANSPORTATION FACILITIES



1
Front wheel rolling



2
Rear wheel rolling



3
Restore



Name: reflective road cone
Model: TLJT-LJO1
Specification: $40 \times 400 \times 750 \text{mm}$
Material: PC plus reflective
Character Application: Construction warning isolation



Name: Water horse isolated
Specification: $1500 \times 650 \times 200 \text{mm}$
Material: PC rubber
Model: TLSM-01
Application: Dedicated for road bifurcation guidance



Name: Reflective Road
Model: TLJT-LJ02-PVC
Specification: $300 \times 300 \times 450 \text{mm}$
 $360 \times 360 \times 700 \text{mm}$
Material: PVC
Application: For construction warning isolation



Name: Reflective Road
Model: TLJT-LJ02-B
Specification: $400 \times 400 \times 750 \text{mm}$
 $360 \times 360 \times 700 \text{mm}$
Material: Rubber plus reflective gold grid
Application: For construction warning isolation



Name: reflective road cone
Model: TLJT-LJ02-XS
Specification: $40 \times 400 \times 750 \text{mm}$
Material: PC plus reflective character
Application: Construction warning isolation



Name: Spring post
Model: TLJT-TLZ01
Specification: $\phi 100 \times 450 \text{mm}$
 $\phi 100 \times 780 \text{mm}$
Material: rubber/PC plus reflective character
Application: isolation



名称: 柔性柱
型号: TLJT-RXZ01
规格: $\phi 89 \times 450 \text{mm}$
 $\phi 89 \times 750 \text{mm}$
材料: PVC加反光晶格
适用: 道路分叉口警示、隔离用



名称: 黄闪灯
型号: TLJT-HSD02
规格: $380 \times 80 \text{mm}$
材料: 塑料
适用: 施工道路



Name: Solar yellow flashing light
Model: TLJT-HSD01
Material: Plastic
Application: under-construction




Name: A plate
Material: Plastic
Model: TLJT-A01
Specification: $620 \times 300 \times 210 \text{mm}$
Application: Road entrance and exist




Name: A plate
Material: Stainless steel
Model: TLJT-A02
Specification: $470 \times 590 \times 590 \text{mm}$
Application: Various lobby

PROTECTIVE PILE SERIES


TRANSPORTATION FACILITIES

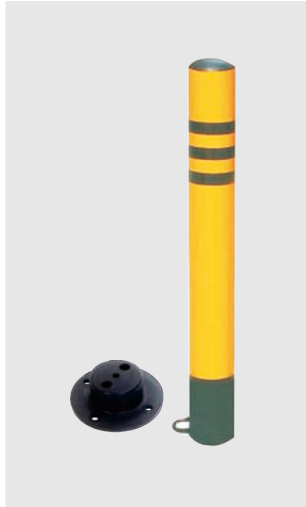

Name: Protective Pile (Activity)
Model: TLJT-FHZ02
Specification: $\phi 76 \times 600 \text{mm}$
 $\phi 89 \times 750 \text{mm}$, $\phi 114 \times 1000 \text{mm}$
Material: high quality steel pipe,
high pressure spraying
Engineering grade reflective film
Application: road entrance

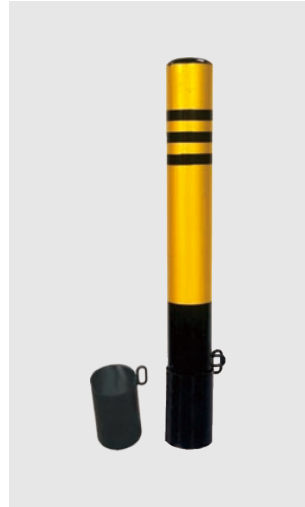

Name: Protective Pile (Activity)
Model: TLJT-FHZ02-M
Specification: $\phi 76 \times 600 \text{mm}$
 $\phi 89 \times 750 \text{mm}$, $\phi 114 \times 1000 \text{mm}$
Material: high quality steel pipe,
high pressure spraying
Engineering grade reflective film
Application: road entrance

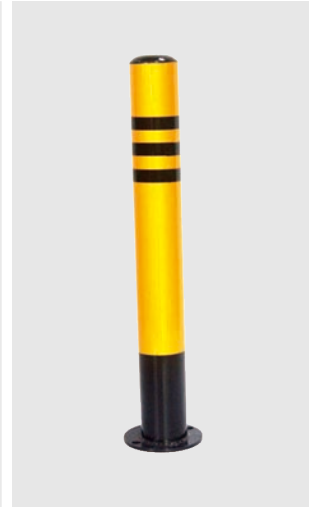

Name: Protective Pile (Fixed)
Model: TLJT-FHZ01
Specification: $\phi 76 \times 600 \text{mm}$
 $\phi 89 \times 750 \text{mm}$, $\phi 114 \times 1000 \text{mm}$
Material: high quality steel pipe,
high pressure spraying
Engineering grade reflective film
Application: road entrance



Name: Protective Pile (Fixed)
Model: TUJT-FHZ02-ST
Specification: $\phi 76 \times 600 \text{mm}$
 $\phi 89 \times 750 \text{mm}$, $\phi 114 \times 1000 \text{mm}$
Material: high quality steel pipe,
high pressure spraying
Engineering grade reflective film
Application: road entrance



Name: Protective Pile (Fixed)
Model: TLJT-FHZ01-DH
Specification: $\phi 76 \times 600 \text{mm}$
 $\phi 89 \times 750 \text{mm}$, $\phi 114 \times 1000 \text{mm}$
Material: high quality steel pipe,
high pressure spraying
Engineering grade reflective film
Application: road entrance





Name: Protective Pile (Fixed)
Model: TLJT-FHZ01-EH
Specification: $\phi 76 \times 600 \text{mm}$
 $\phi 89 \times 750 \text{mm}$, $\phi 114 \times 1000 \text{mm}$
Material: high quality steel pipe,
high pressure spraying
Engineering grade reflective film
Application: road entrance



Name: Protective Pile (Fixed)
Model: TLJT-FHZ03
Specification: $\phi 76 \times 600 \text{mm}$
 $\phi 89 \times 750 \text{mm}$, $\phi 114 \times 1000 \text{mm}$
Material: high quality steel pipe,
high pressure spraying
Engineering grade reflective film
Application: road entrance



Name: Protective Pile (Fixed)
Model: TLJT-FHZ04
Specification: $\phi 133 \times 600 \text{mm}$
Material: high quality steel pipe,
high pressure spraying
Engineering grade reflective film
Application: road entrance

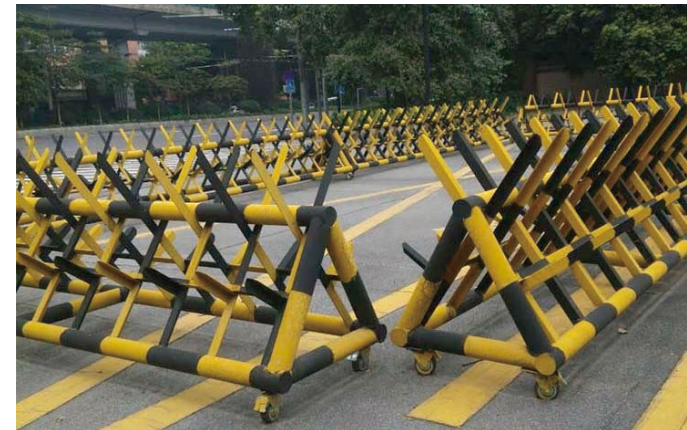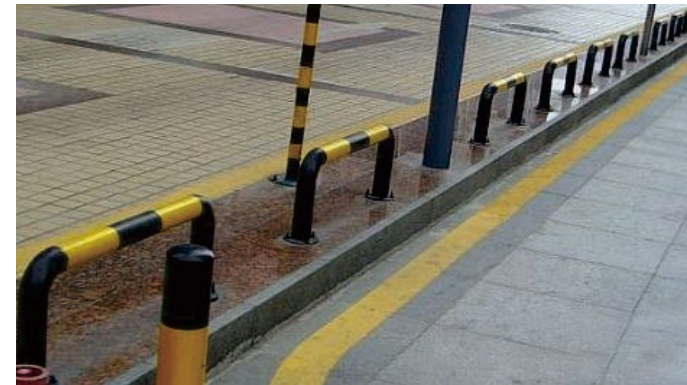

Name: fence
Model: TLJT-HL01
Material: steel pipe forming
Specification: $\phi 42 \times 1500 \times 1000 \text{mm}$



Name: fence
Model: TLJT-JHL01
Material: steel pipe forming
Specification: $\phi 38 \times 1500 \times 1050 \text{mm}$




Name: U-shaped guardrail
Model: TLJT-UHL01
Material: high quality steel pipe, high
pressure spraying Engineering grade
reflective film
Specification: $\phi 38 \times 1500 \times 1050 \text{mm}$
Application: aisle

LIFTING COLUMN SERIES


TRANSPORTATION FACILITIES

Product Parameters

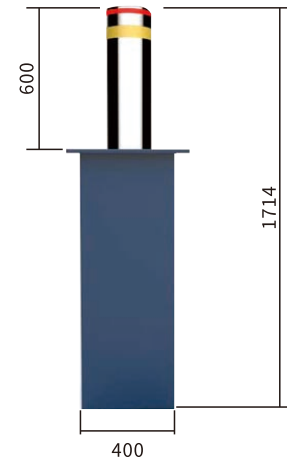

The main technical parameters

1. System control; electro-hydraulic drive.
2. Lowest passing pressure: It can pass container trucks with more than 80-120 tons.
3. Power supply: 220V (control voltage 24V).
4. System power (w): 350W in one.
5. Rise time: ≤ 45 (adjustable).
6. Fall time: $\leq 3S$ (adjustable).
7. Working temperature: $-35^{\circ}C-75^{\circ}C$ (suitable).
8. Storage environment: $-10^{\circ}C-65^{\circ}C$, rainproof, moistureproof and dustproof.
9. Lie material: 304 stainless steel.
10. Height of lifting cylinder: 600mm.
11. Standard thickness: 6mm.
12. Diameter selection: 168/219/275/324mm.
13. Cabinet: 500X500X1130.



Fully automatic



semiautomatic



Manual



SECOND-GENERATION MULTIFUNCTIONAL PARKING LOCK

TRANSPORTATION
FACILITIES



Name:O type manual parking lock
Model:TLCWS-02
Material:High-temperature steel spraying
Application:dedicated for parking spaces



Name:k-type manual parking lock
Model:TLCWS-03
Material:High-temperature steel spraying
Application:dedicated for parking spaces



Name:Wheel lock (size with alarm bracket / puncture needle)
Material:High-temperature steel spraying
Model:TLCLS-02
Application:dedicated to urban management law enforcement
(small and medium-sized cars)
Wheel diameter:φ1200mm



Name:Wheel lock (size with alarm bracket / puncture needle)
Material:High-temperature steel spraying
Model:TLCLS-06
Application:dedicated to urban management law enforcement
(for large car containers)
Wheel diameter:φ1200mm



Name:Remote parking lock (with remote control, battery)
Model:TLCLS-07
Material:High-temperature steel spraying
Application:dedicated for parking spaces



Name:Portable wheel lock
Model:TLCLS-08
Material:High-temperature steel spraying
Application:for trolley
Wheel width:180mm-270mm



Name:A type manual parking lock
Model:TLCWS-05
Specification:600X130X400mm
Material:High-temperature steel spraying
Application:dedicated for parking spaces




Name:automatic parking lock
Model:TLCWS-08
Specification:68X220X350mm
Material:High-temperature steel spraying
Application:dedicated for parking spaces



Name:U type manual parking lock
Model:TLCWS-06
Specification:600X350X630mm; 840mm
Material:High-temperature steel spraying
Application:dedicated for parking spaces



Name:Octagonal manual parking lock
Model:TLCWS-07
Specification:580X500X300mm
Material:High-temperature steel spraying
Application:dedicated for parking spaces

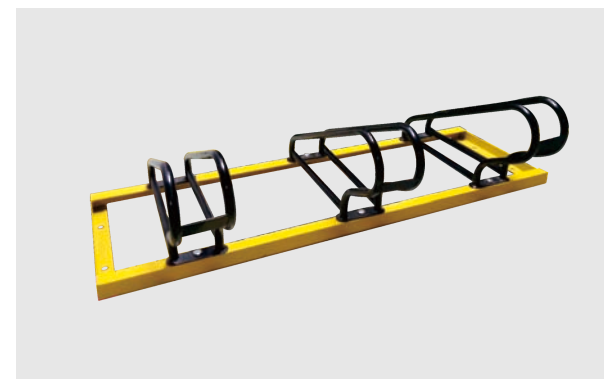

Name:Bicycle rack
Specification:1200X550X300mm
Material:High-temperature steel spraying
Model:TLJT-ZXC-J01
Application:Schools and other public places