




\* All rights reserved.  
\* Copyright is owned by Trenite.  
\* Printed in January,2024.


Zrenite 特 灵  
KIN LONG

## Catalogue of Protective Film Products

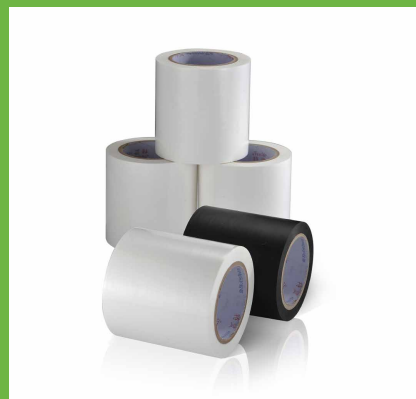

Guang Dong Trenite Safety Equipments Co., Ltd  
(Guang Dong KIN LONG Hardware Products Co., Ltd. Wholly-owned Subsidiary)  
NO.3 Jianlang RD,Daping Industrial Zone,Tangxia Town,Dongguan City,China  
T: 0086-0769-82166666/82136666  
F: 0086-0769-82955240/82955241  
E: mail@kinlong.com  
H: www.kinlong.com

www.kinlong.com







STOCK CODE: 002791

TO IMPROVE THE HUMAN  
BEING'S LIVING CONDITIONS AND  
MAKE KINLONG THE SYNONYM  
FOR HIGH-QUALITY.

More than **900,000**<sub>m²</sub>  
production area.

More than **60** subsidiaries.

More than **1000** sales offices both  
in domestic and overseas .

More than **16,000** employees.

# ESTABLISHING BENCHMARK AND PURSUING EXCELLENCE

Kinlong was established in 2003 and is a company engaged in design and research, manufacturing and sales of construction and building products. We are committed to provide high-quality products and services. After years of development, Kinlong has become a reputable brand in the construction industry.

Kinlong industrial park has an area of more than 900,000 square meters and has an employment of more than 16000 staff. Kinlong owns more than 60 subsidiaries, and with over 1000 sales branches in the domestic and overseas markets. The company has more than 20,000 categories of products, which has been sold to more than 100 countries and areas. Kinlong, with it's sophisticated production management, provides customers with integrated solutions for different functional buildings.

Focusing on providing integrated construction and building accessories and diversified products, Kinlong continues to meet customer needs and market changes with the sales model of "R&D + manufacturing + service", and sets up its own marketing networks to directly provide customers with products and technical services. With years of precipitation and accumulation, Kinlong is at the forefront of the industry.

Over the years, Kinlong has been embracing the philosophy of "Unique value is created by professionalism, but no future shall be created by speculation". This has made Kinlong standing on the leading position in construction hardware market. Kinlong has provided products and services for many famous buildings around the world, and the landmark buildings of countless cities have become the pride and glory of Kinlong people.

To every designer, engineer and company committed in construction industry, Kinlong is always the most trustworthy and reliable partner.

## Social Responsibility



For more than ten years, Kinlong has not forgotten to give back to the society while developing itself. By the end of 2023, more than 90 kinlong social charity schools have been donated and built in remote and backward areas.





1000 patents,among them

100 of invention patents.

Participate 200 industrial standards compile.

## INNOVATION AND ENTERPRISING INDUSTRY BENCHMARK

KINLONG KEEPS MAKING  
PROGRESS BY INNOVATION, BY  
WHICH WE HAVE OBTAINED  
RECOGNITION AND HIGH PRAISE  
FROM STATE  
DEPARTMENTS,GOVERNMENT  
UNITS AND SECTORS .



### ENTERPRISE REPRESENTATIVE HONOR

Second Prize in National Science and Technology Progress Award

First Prize in Huaxia Construction Science and Technology Award

Second Prize in Huaxia Construction Science and Technology Award

Special Prize in China Steel Structure Association Science and Technology Award

First Prize in China Steel Structure Association Science and Technology Award

Innovation Award in China Steel Structure Association Science and Technology Award

The most influential brand of Jinxuan Award in the construction door, window and curtain wall industry for four consecutive sessions;

2021 TOP500 Preferred Supplier of Comprehensive Strength of Chinese Real Estate Development Enterprises-Smart Community Service Category

National High-Tech Enterprise

.....

### REPRESENTATIVE R&D INNOVATION HONOR

National Intellectual Property Demonstration Enterprise

Laboratory center approved by the National Accreditation Board

Guangdong Provincial Enterprise Technology

Center and Provincial Engineering Center

.....


Kinlong adheres to the philosophy that Unique value can only be created by professionalism,speculation has no future. Our enterprise core value is to respect Respecting science; Striving for coexistence and all-win; Promoting constant innovation; Pursuing sincerity and trustworthiness. and we always insist making innovation, breaking through and making progress, increasing our capacity of research, by which we have obtained recognition and praise from government departments, units and all areas in the society and get many achievements. We pay great attention to the needs from our customers and the prospect of our industry, consistently pursuing perfect, good quality, excellent service and systematic solutions. Our quick and accurate ability of handing over are always leading the market.

KINLONG IS LEADING THE  
MARKET BY GOOD QUALITY,  
EXCELLENT SERVICE,  
SYSTEMATIC SOLUTIONS AND  
QUICK AND ACCURATE ABILITY  
TO DELIVER THE GOODS.

### To Form a Full-chain Comprehensive Advantage



### Quality Comes from Profession

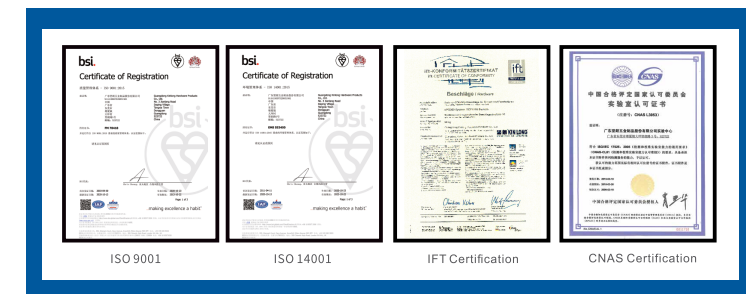


Management system certificated by ISO9001,ISO14001 of BSI. Test Laboratory accredited by the China National Accreditation Service of Conformity Assessment(CNAS) .

### International Supply Chain to Guarantee Better and Better Service



Kinlong owned more than 1000 sales outlets at home and abroad, with a sales team of more than 6,000 staff to provide customers with rapid response. With more than 30 offices,10 subsidiaries,15 warehoused overseas market, and more will be set up.




## PRODUCT INTRODUCTION


Trenite protective film is one of the core products under the Trenite brand, with exquisite craftsmanship and excellent quality. The company provides full range of product solutions in research and development, manufacturing, and sales, taking it as its responsibility to meet customer needs, and continuously develops protective packaging products with core competitiveness and independent innovation capabilities.

The protective film products of the "Trenite" brand, have passed the testing of national authoritative agencies, They mainly produce PE tape protective film, PE spacer tape protective film, PE tape glass protective film, PVC tape protective film, masking tape, masking film tape, and stretch film, washi tape, warning tape, fabric tape, glass decorative film, seal tape, and packaging tape and ETC. fabric tape, glass decorative film, sealing tape, etc, which can meet the needs of different customers.

## MODEL DESCRIPTION

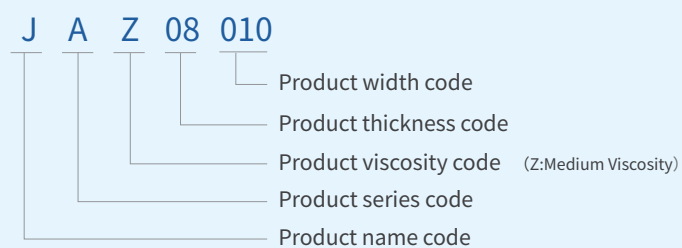





# PRODUCT ADVANTAGES

**Product and service advantages:** One stop purchasing of protective packaging materials and one-on-one professional services;

**Product customization advantages:** Different specifications and size can be customised to meet the need of different scenarios. Customer trademarks can be customised to achieve brand promotion effects for customers;

**Advantages of honest sales:**Direct sales of branded product, honest transactions, full satisfaction, quality and quantity assurance;

**Quality assurance advantages:** With advanced and complete testing equipment, complete process control, and guaranteed quality stability.


# SCOPE OF APPLICATION

The viscosity of the tape protective film corresponds to the reference scope of profile surface treatment.



Viscosity	scope of application	Usage scenario
Static electricity	Suitable for glass protection	Glass factory
Low viscosity	Suitable for glass, wood, stainless steel smooth surface protection	Glass factory, wooden doors, fire doors, aluminum veneer
Medium Viscosity	Suitable for surface protection of oxidized and electrophoretic smooth aluminum materials	Door and window frames, fire door panels
High viscosit	Suitable for glass, wood, stainless steel smooth surface protection	Door and window frames, fireproof door frames
Extra high viscosity	Suitable for spraying rough-grained frosted aluminium surface protection.	Door and window frames









# 1 APPLICATION PRODUCTS

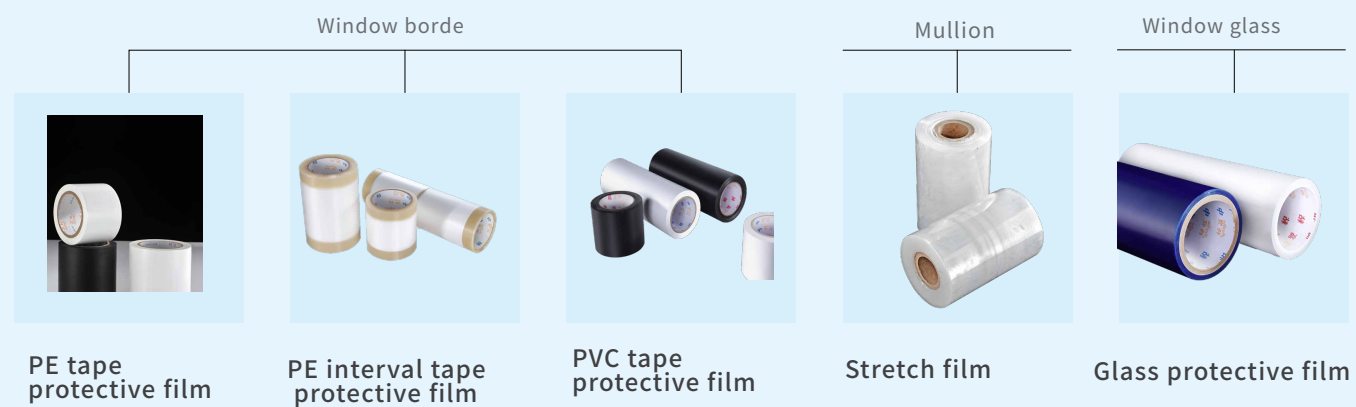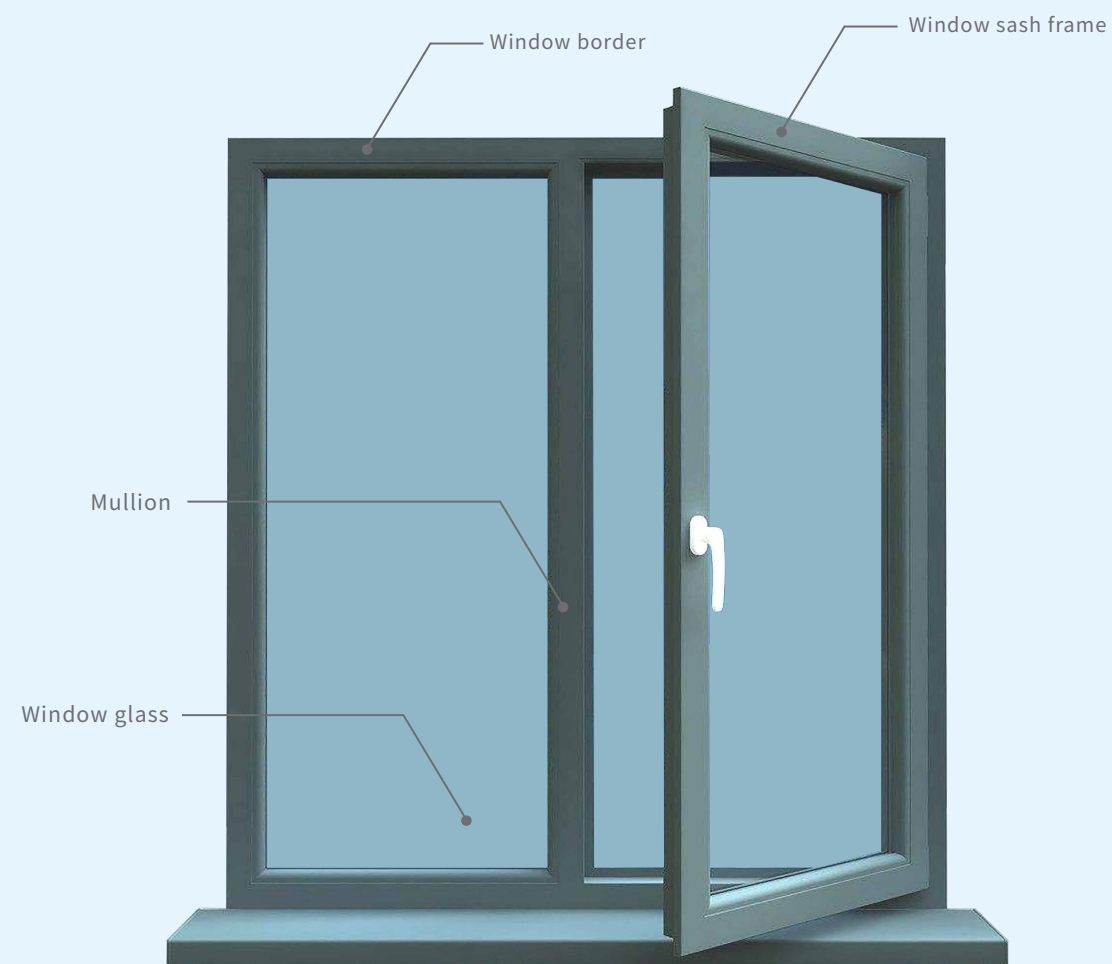


# 2 APPLICATION PRODUCTS

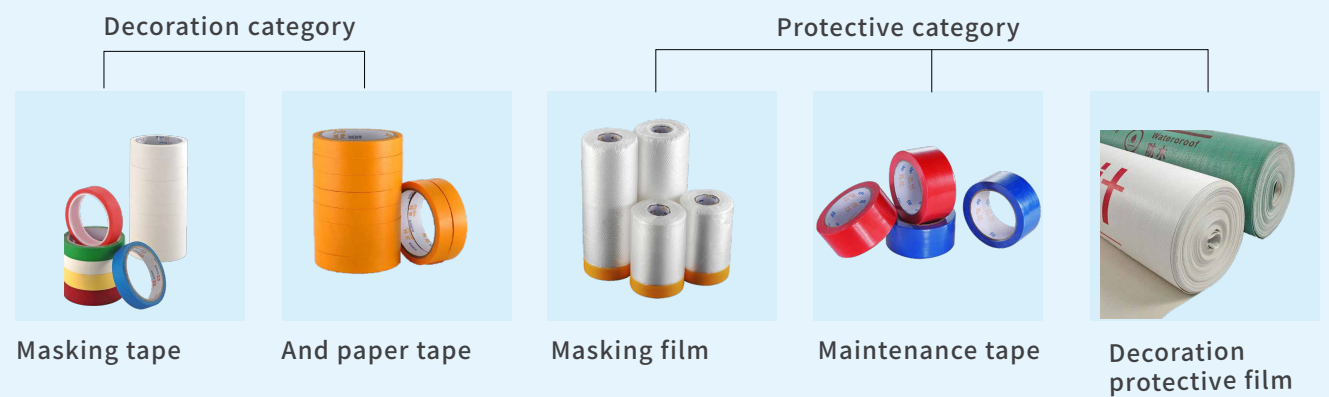


# 3 APPLICATION PRODUCTS

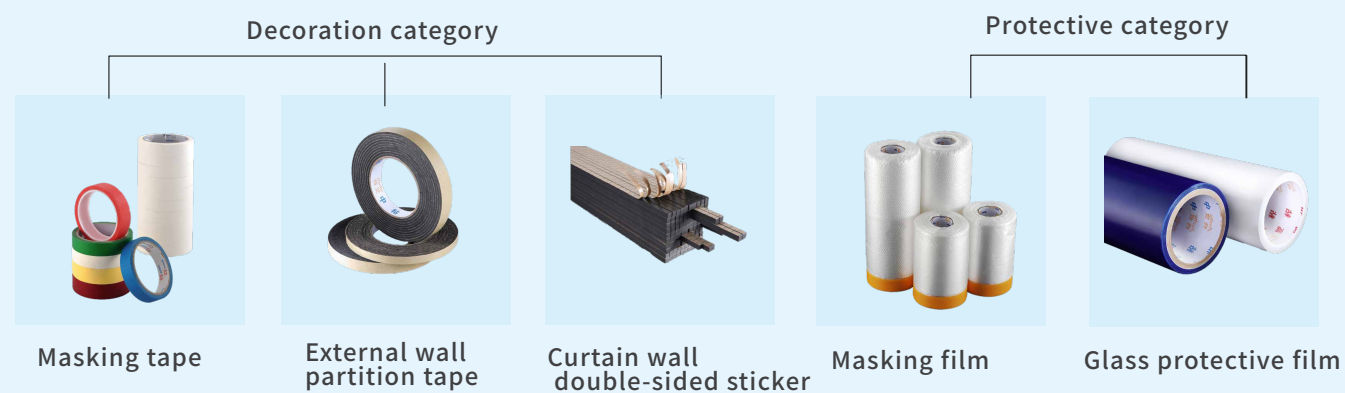






## 4 Application scenarios in glass factories



Glass protective film



Stretch film



PP Strapping Band  
Packing Belt

## 5 APPLICATION PRODUCTS



Packaging tape




Stretch film



Plastic packing belt

## 6 Glass frosted film



Adhesive PET pure matte




80g paper with ad  
hesive, pure matte



Electrostatic PET  
pure matte


## 7 Glass art film

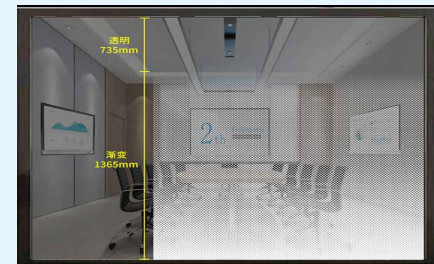

Upward gradient film



Vertical striped film

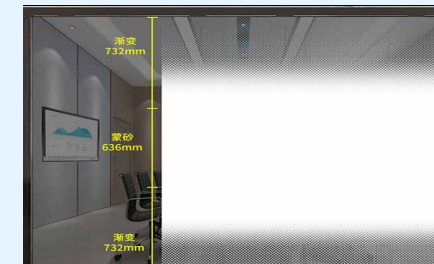


Bidirectional gradient film




Silver brushed film





## PRODUCT CATALOG

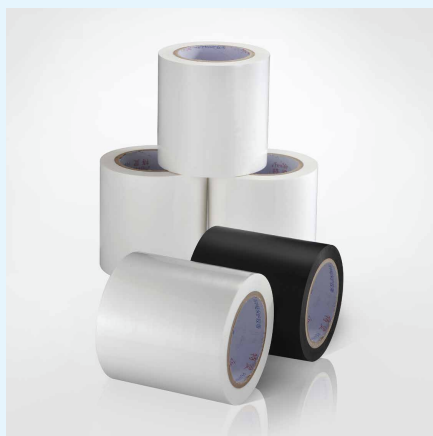

PE tape protective film / P13




Stretch film/ P21



PE interval tape protective film / P15



PVC tape protective film / P17



Glass protective film / P19



Masking tape / P23



Curtain wall double-sided sticker / P25



Decoration protective film / P27



Maintenance tape / P29



External wall partition tape / P31



Washi tape / P33


## PRODUCT CATALOG



QR code for protective film electronic brochure




Masking film tape/ P35



Glass frosted film/ P37-39



Glass frosted film/ P41



Glass art film/ P43




Packing Tape / P41



Packing belt/ P43





## PE tape protective film (JA series)

### Product Description

This product uses PE film as the base material, and is processed by several specific adhesive agents through coating, cutting, packaging and other processes.

### Product features

Good adhesion performance, easy to stick, easy to peel off, the glue is environmentally friendly..


### Application area

Mainly used for surface protection and scratch prevention of aluminum, aluminum plates, stainless steel, and other materials.



### Precautions for tape protective film

- (1) Choose a tape protective film with the corresponding viscosity for different profile surface treatments. A product with one viscosity cannot be suitable for all profiles and high viscosity cannot be blindly pursued;
- (2) If other profiles are replaced during use, the viscosity of the tape protective film must be tested and verified again;
- (3) The surface of the profile to be pasted must be cleaned. If there are pollutants such as dust, oil stains, and adhesive marks, it will affect the pasting effect of the tape protective film;
- (4) The effective film removal time is within 45 days of pasting the profile (except for the warranty period). If the effective film removal time is exceeded, the film may become delaminated or difficult to tear.
- (5) It is strictly prohibited to operate in a work environment with a relative humidity greater than or equal to 70%, as any operation may cause delamination;
- (6) The storage conditions for tape protective film should avoid exposure to sunlight, rain, squeezing, temperatures exceeding 60 ° C, and humidity exceeding 70%;
- (7) In engineering projects, if the tape protective film is affected by other external factors, such as doors and windows with tape protective film are exposed to outdoor sunlight, the project site is covered with pollutants such as cement, mortar, real stone paint, etc., and the tape protective film is worn or cracked before peeling off the film), it will lead to the phenomenon of failure to peel off the film normally and residual adhesive.
- (8) Tape protective film is a chemical products with a certain warranty period. It is recommended to place orders and stock according to monthly demand.

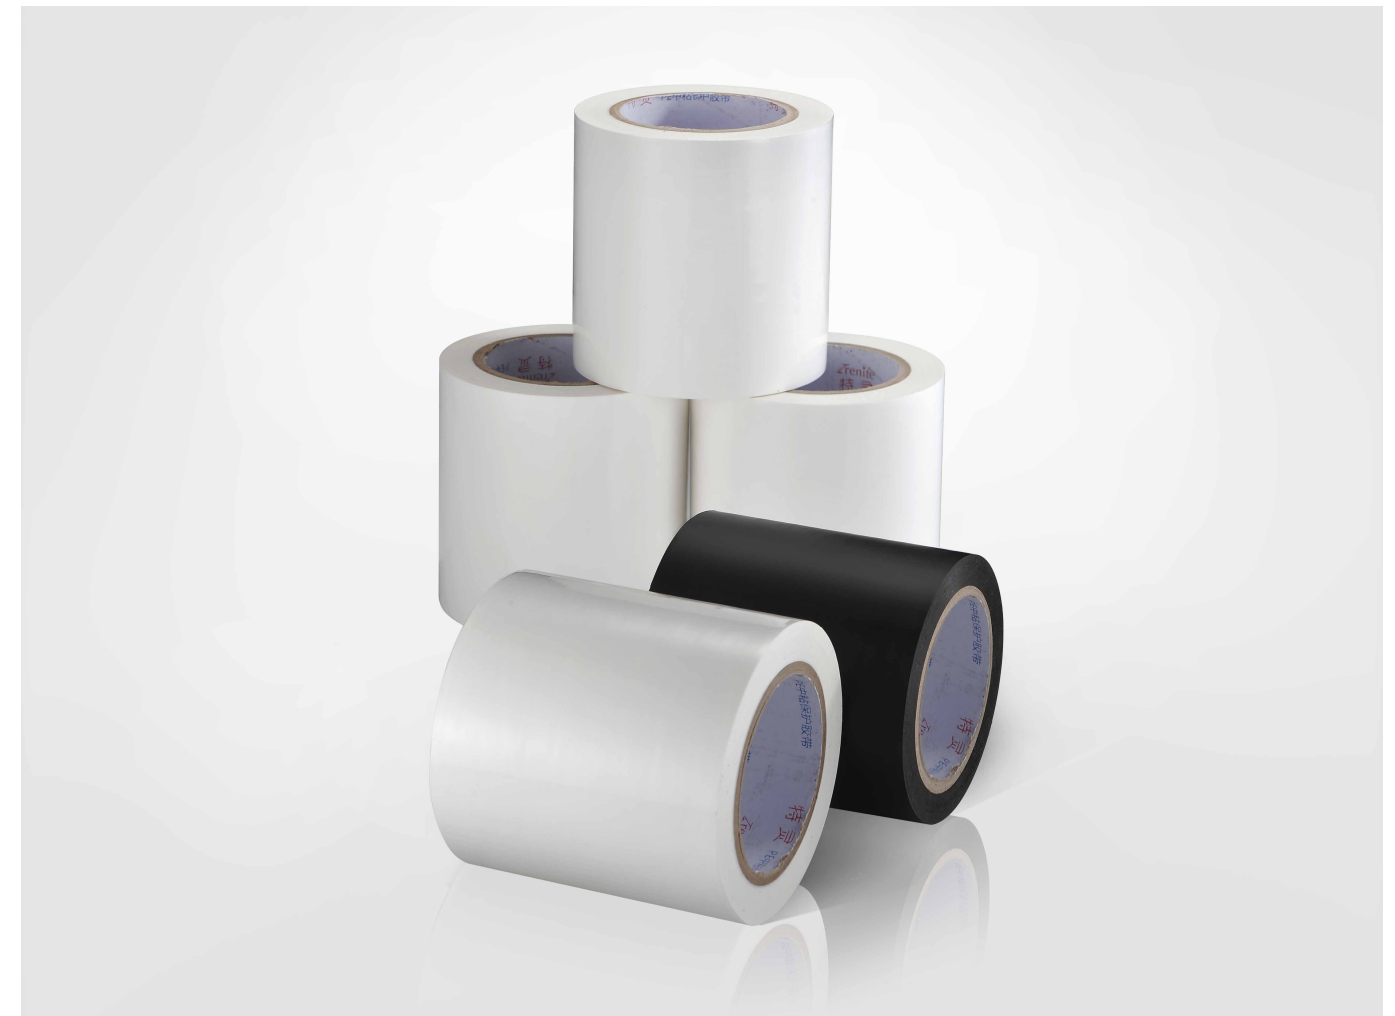


### Product parameters

Model/ Specification	Tape thickness	Viscosity	Applicable surface treatment	Product color
JAD03+width	0.03mm	Low viscosity	Wood and stainless steel surface protection	Transparent
JAZ08+width	0.08mm	Medium viscosity	Smooth surface profiles	Milky white, black
JAG10+width	0.10mm	High viscosity	Fine grain frosted profile	Milky white, black
JAT10+width	0.10mm	Extra high viscosity	Rough grain frosted profile	Milky white, black
JAT12+width	0.12mm	Extra high viscosity	Rough grain frosted profile	Milky white, black

### Illustration::

- The standard length of each roll is 50 meters;
- For the first time, it is necessary to test the general physical properties of the tape protective film and the fit of the profile;
- The width can be customized according to customer needs, measured in millimeters, with 1 inch=25.4mm.





## PE Spacer tape protective film (JL series)

### Product Description

The base material uses high-pressure low-density PE as raw material to increase the hardness of the base material, making it easy to peel off the film. It breaks through the traditional full glue coating process and the unique indirect glue coating process to reduce the possibility of product delaminated.

### Product features

Simple operation, complete specifications, no traces left, not easy to fall off, not easy to break.

### Application area

Widely used for anti fouling and anti damage protection during the installation of various doors and windows, and more suitable for plastic steel doors and windows.




### Product parameters

Model/ Specification	tape thickness	viscosity	Applicable surface treatment	Product color
JLZ08+width	0.08mm	Medium viscosity	Surface Protection of Oxidized Electrophoretic polished Profile	translucent
JLG10+width	0.10mm	High viscosity	Surface protection of spray-coated rough-grained frosted profiles	translucent

#### Illustration:

- Viscosity testing is required for the first selection;
- The standard length of each roll is 60 meters;
- The width can be customized according to customer needs, measured in millimeters, with 1 inch=25.4mm.





PVC tape protective film (JK series)

Product Description

This product is made of PVC film as the base material which is then mixed with several specific adhesive aids and processed through coating, cutting, packaging and other processes.

Product features

Good anti-aging, strong adhesion, easy to paste, easy to peel, and good weather resistance of glue.

Application area

Mainly used for surface protection of aluminum, plastic steel, stainless steel, fireproof windows, fireproof doors, and door and window glass.



Precautions for tape protective film

- (1) Choose a tape protective film with the corresponding viscosity for different profile surface treatments. A product with one viscosity cannot be suitable for all profiles and high viscosity cannot be blindly pursued;
- (2) If other profiles are replaced during use, the viscosity of the tape protective film must be tested and verified again;
- (3) The surface of the profile to be pasted must be cleaned. If there are pollutants such as dust, oil stains, and adhesive marks, it will affect the adhesion effect of the tape protective film;
- (4) The effective film removal time is within 45 days of pasting the profile (except for the warranty period),. If the effective film removal time is exceeded, the film may become delaminated or difficult to tear.
- (5) It is strictly prohibited to operate in a work environment with a relative humidity greater than or equal to 70%, as any operation may cause delamination;
- (6) The storage conditions for tape protective film should avoid exposure to sunlight, rain, squeezing, temperatures exceeding 60 ° C, and humidity exceeding 70%;
- (7) In engineering projects, if the tape protective film is affected by other external factors, such as doors and windows with tape protective film are exposed to outdoor sunlight, the project site is covered with pollutants such as cement, mortar, real stone paint, etc., and the tape protective film is worn or cracked before peeling off the film), it will lead to the phenomenon of failure to peel off the film normally and residual adhesive.
- (8) Tape protective film is a chemical products with a certain warranty period. It is recommended to place orders and stock according to monthly demand.




Product parameters

Model/ Specification	tape thickness	viscosity	Applicable surface treatment	Product color
JKZ10+width	0.10mm	Medium viscosity	Surface Protection of Oxidized Electrophoretic polished Profile	Milky white, black
JKG10+width	0.10mm	High viscosity	Surface protection of spray-coated rough-grained frosted profiles	Milky white, black

Illustration::

- The settlement unit is square meter, and the standard length of each roll is 50 meters;
- When using for the first time, it is necessary to test the general physical properties of the tape protective film and the fit of the profile.





Glass protective film (JA/JK series)

Product Description


This product is made of PE and PVC films as the base material, and then mixed with several specific adhesive aids, and processed through processes such as coating, cutting, and packaging

Product features

Electrostatic film: The product relies on its own electrostatic adsorption of glass, it has good weather resistance,  
After the glass is installed, no traces or residual glue will be left after it is torn off, ensuring the cleanliness and brightness of the glass.  
Low adhesive film: The glue is colorless and transparent, with good adhesion effect and no residual glue is left after peeling.

Application area

Glass protective film is widely used in precision decoration to protect the surface of door and window glass, preventing scratches and stains.

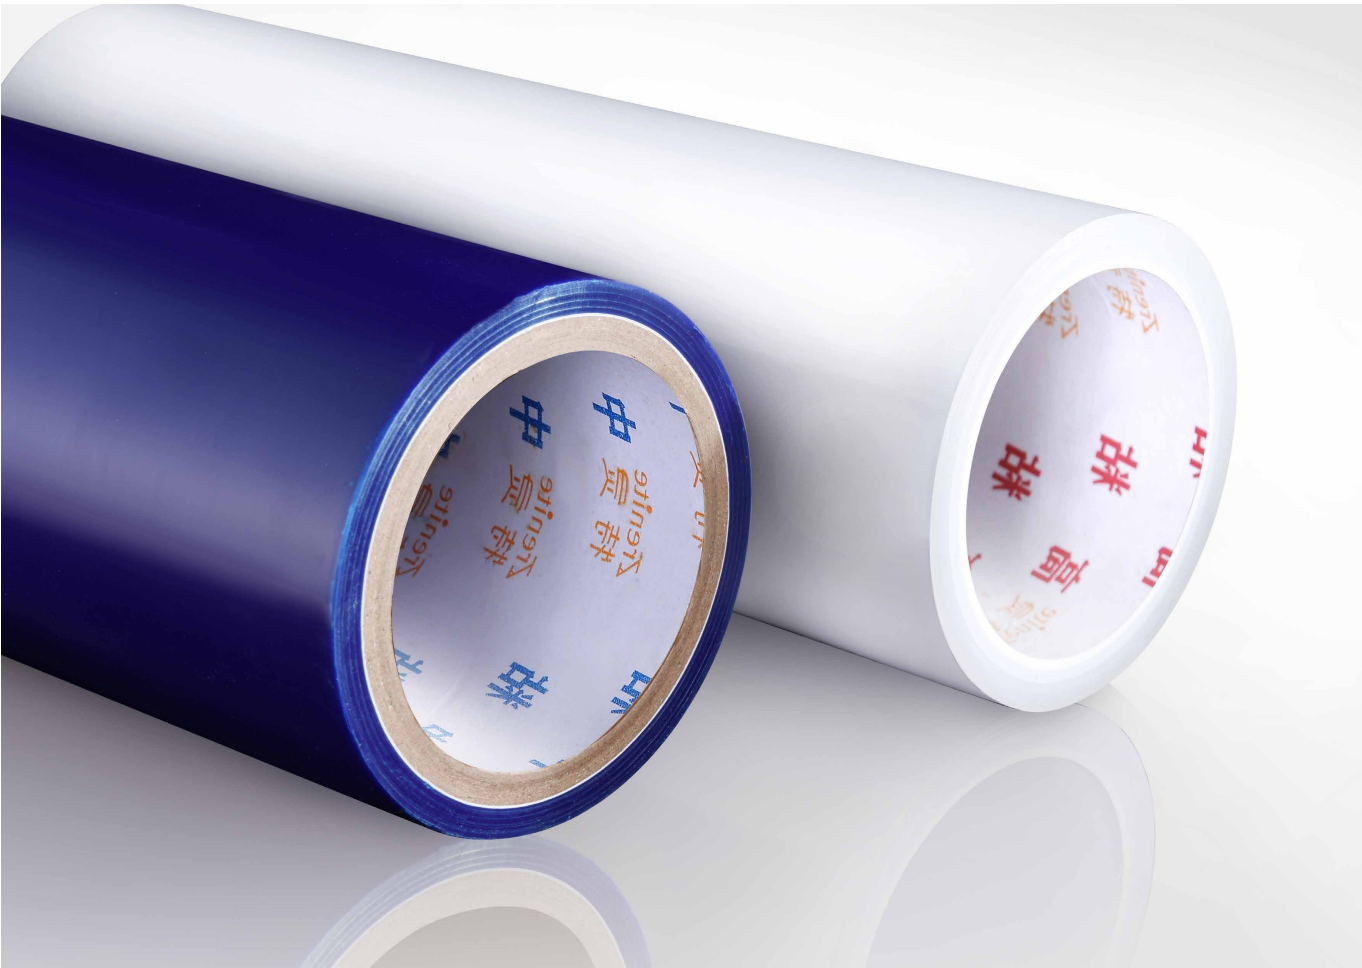


Product parameters

Model/ Specification	tape thickness	viscosity	material quality	Applicable surface treatment	Product color
JAD03+width	0.03mm	Low viscosity	PE	Glass surface protection	transparent
JAW03+width	0.03mm	static electricity	PE	Glass surface protection	transparent
JKW03+width	0.03mm	static electricity	PVC	Glass surface protection	transparent

Illustration:

- The settlement unit is square meter, and the standard length of each roll is 300 meters;
- The first time selection needs to test the adhesion between the tape protection film and the glass. The width, thickness and colour can be customised according to customer needs.





Stretch film (JG series)

Product Description


Stretch film, It is soft and thin, with excellent stretchability, puncture resistance, and tear resistance, and has large retraction and lasting tightening force. It has the characteristics of high transparency, high longitudinal elongation, high yield point, and high transverse tear strength.

Product features

The Stretch film has good tear resistance, puncture resistance, and tensile properties;  
The Stretch film on the guardrail is easy to operate and has high efficiency.

Application area

Stretch film is widely used in the overall packaging of various products such as door and window frames, profiles, hardware; In the field of warehouse storage, foreign countries also make more use of stretch film pallet packaging for three-dimensional storage and transportation to save space and land.  
Guardrail stretch film is widely used in various guardrails to protect product surface during transportation and decoration, avoiding scratches and cement mortar pollution.

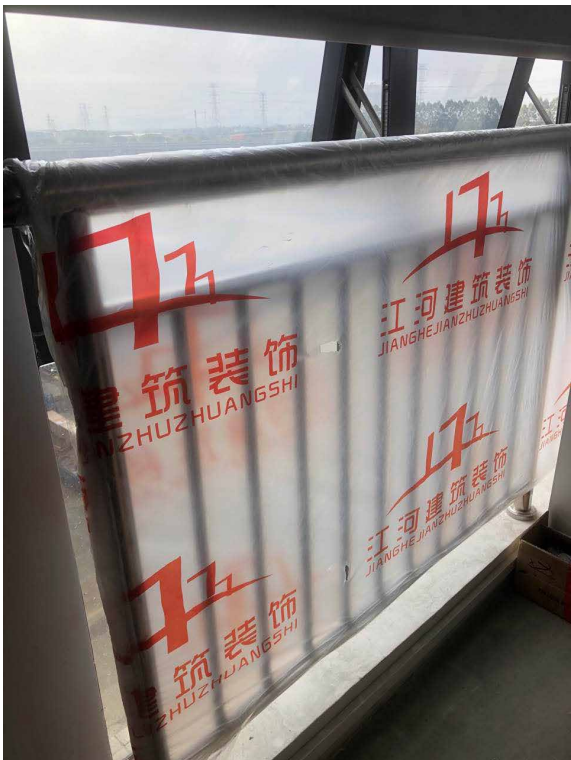


Product parameters

Model/ Specification	tape thickness	viscosity	Applicable surface treatment	Product color
JGW03120	0.03mm	No glue	Window mullion	transparent
JGW03450	0.03mm	No glue	Logistics cargo packaging	transparent
JGW031200	0.03mm	No glue	Guardrail protection	transparent

Illustration:

- The settlement unit is weight (KG);
- The guardrail Stretch film can print customer information according to customer needs;
- The regular color of the product is transparent. If customers have special requirements for width, thickness, and color, they can all be customized.



## Masking tape (JB series)

### Product Description

Masking tape is a rolled adhesive tape made from masking paper and glue as the main raw materials, with adhesive coated on the masking paper and anti-sticking material on the other side. The industry generally calls it masking pressure-sensitive adhesive tape.

### Product features

Easy to stick, tear, and peel off. It has characteristics such as high temperature resistance, excellent resistance to chemical solvents, high adhesion, soft and compliant, and no residue after tearing.

### Application area

It is widely used in the protection of raw material for building curtain wall and exterior wall glue, which can provide instant adhesion and ideal glue lines, and is suitable for lightweight indoor decoration and paint masking. It can stably adhere to edges and contour surfaces.




### Product parameters

Model/Specification	tape thickness	viscosity	Applicable surface treatment	Packing quantity (roll/box)	Product color
JBZ13018	0.13mm	Medium viscosity	Modify curtain wall glue joint and interior decoration masking function.	180	Off white
JBZ13020	0.13mm	Medium viscosity		165	Off white
JBZ13024	0.13mm	Medium viscosity		135	Off white
JBG13018	0.13mm	High viscosity		180	Yellow
JBG13020	0.13mm	High viscosity		165	Yellow
JBG13024	0.13mm	High viscosity		135	Yellow

Illustration:

- The settlement unit is box;
- The regular color of the product is beige. If customers have special requirements, the width and color can be customized.





## Double sided adhesive tape for curtain walls (JI series)

### Product Description



High quality and environmentally friendly recycled substrates, environmentally friendly adhesives, mainly used for positioning, controlling the spacing between glass and frames, and controlling the width of adhesive application, it is an ideal choices for curtain wall construction.

### Product features

Shockproof, soundproof, and insulated, with good bonding effect and easy construction.

### Application area

It is widely used in glass curtain wall construction, auxiliary installation of profile doors and windows and other decorative projects.

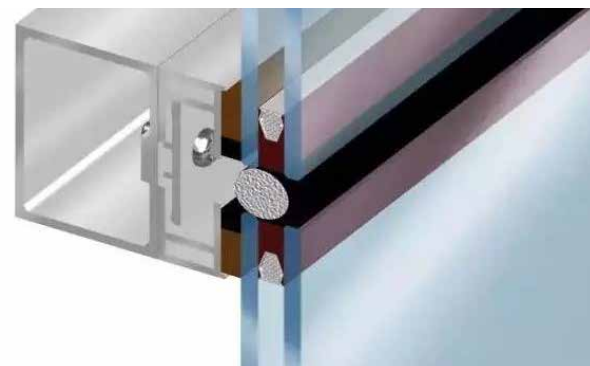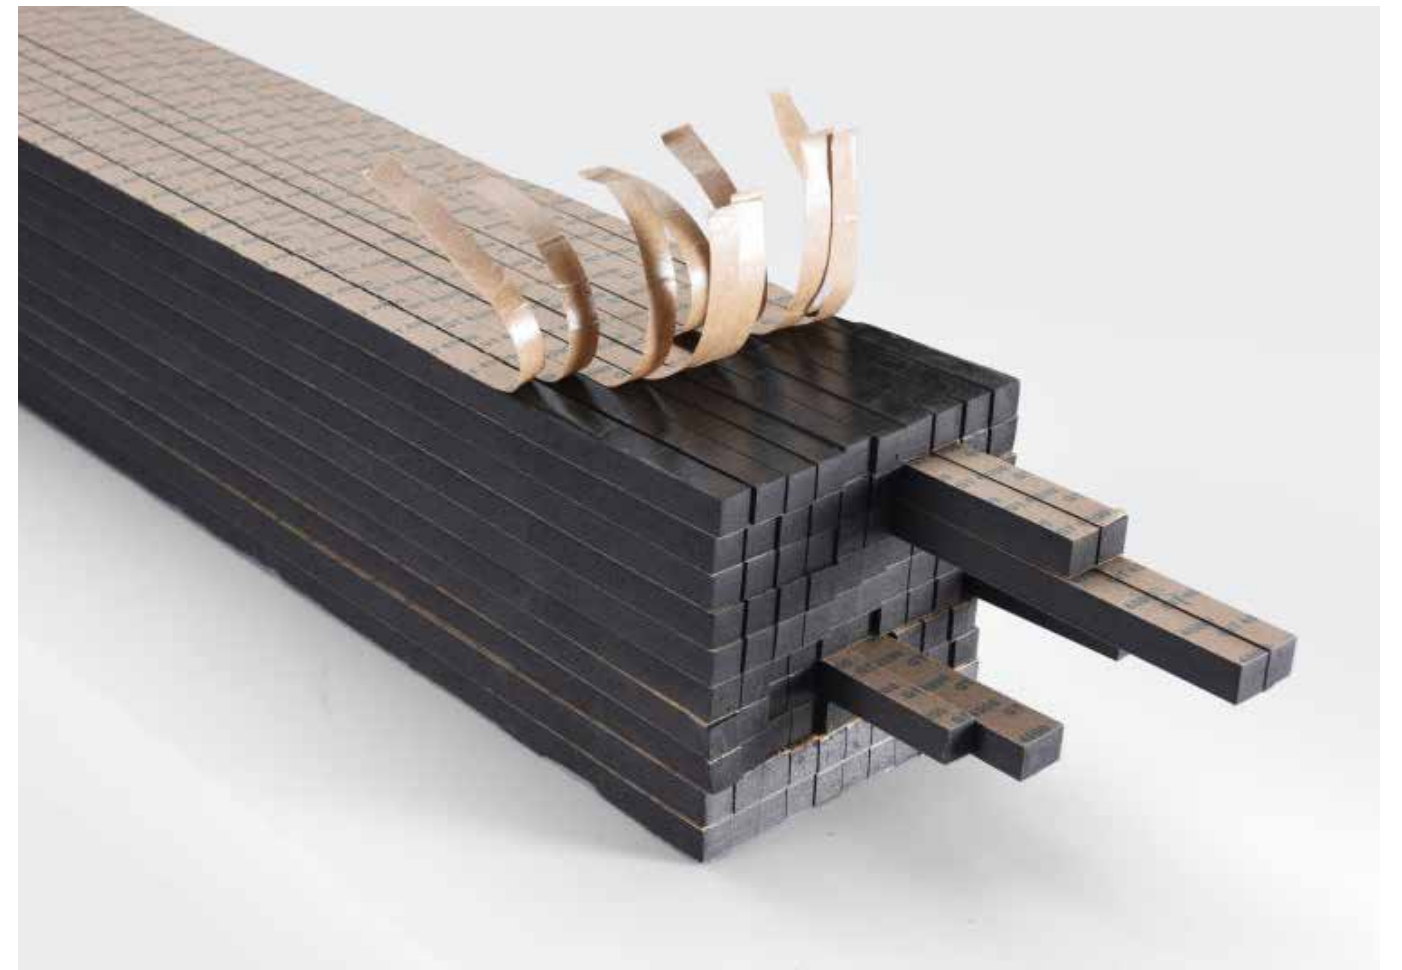


### Product parameters

Model/ Specification	tape thickness	viscosity	Applicable surface treatment	Product color
JIZ06008	6.0mm	Medium viscosity	Control the spacing between glass and frame, and the width of glue application	Black
JIZ08010	8.0mm	Medium viscosity		Black
JIZ10012	10.0mm	Medium viscosity		Black
JIG06008	6.0mm	High viscosity		With black
JIG08010	8.0mm	High viscosity		With black
JIG10012	10.0mm	High viscosity		With black

Illustration:

- In units of roots, one meter per root;
- The width and thickness of the product can be customized according to customer specific requirements.



## Decoration protective film (JE series)

### Product Description




Decoration protective film can prevent hard objects and sand from scratching the ground during decoration, and also effectively prevent colored liquids such as paint from dripping onto the brick surface, causing ground pollution.

### Product features

Anti slip, waterproof, paint-proof strong toughness and not easy to break.

### Application area

Decoration protection: ground protection, tile protection, construction site protection, home decoration protection.

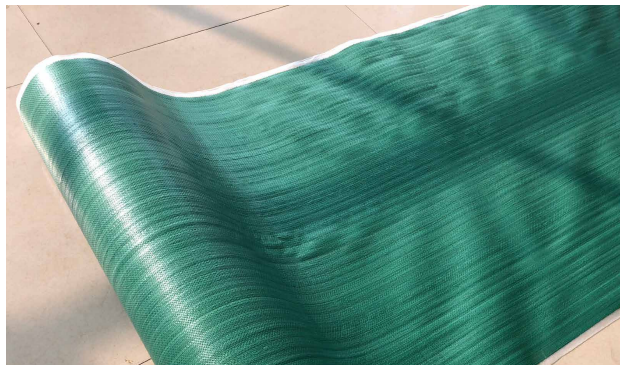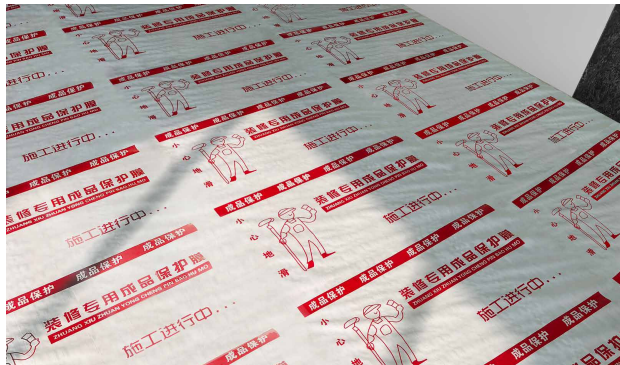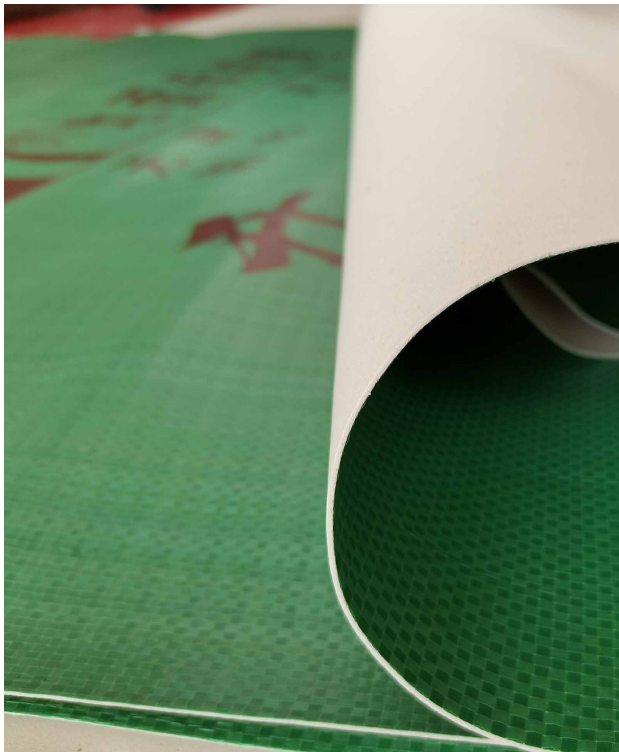


### Product parameters

Model/Specification	material quality	Applicable scenarios	Product Description
JEP01100	PVC+cotton	Protection of Floors and Walls in Interior Decoration	50 meters per roll
JEB01100	Woven fabric+EVA		50 meters per roll
JEZ01100	Pearl cotton+EVA		50 meters per roll
JEW01100	Non-woven fabric+EVA		50 meters per roll

#### Illustration:

- The settlement unit is square meter, and the standard length of each roll is 50 meters;
- The width, thickness, and material of the product can be customized according to customer needs.





Maintenance tape (JM series)

Product Description

Specially used for decoration protective film splicing and construction of ceramic tiles, marble, and cement floors.

Product features

Non delaminated, easy to tear by hand, and strong adhesion.

Application area

Used for indoor and floor decoration.




Product parameters

Model/ Specification	tape thickness	viscosity	Applicable scenarios	Product Description
JMZ16045	0.16mm	Medium viscosity	Decoration protective film and floor paving	25 meters per roll
JMG18045	0.18mm	High viscosity		25 meters per roll

Illustration:

- sold by box;
- The length and color can be customized.





External wall partition tape (JN series)

Product Description



EVA sponge tape is based on EVA foam and coated with acrylic glue on both sides. It is used for imitating brick grids on exterior walls to create a three-dimensional effect.

Product features

No rough edges, no glue falling off, no primer sticking, no deformation, and fast construction.

Application area

Used for exterior wall imitation brick grid.

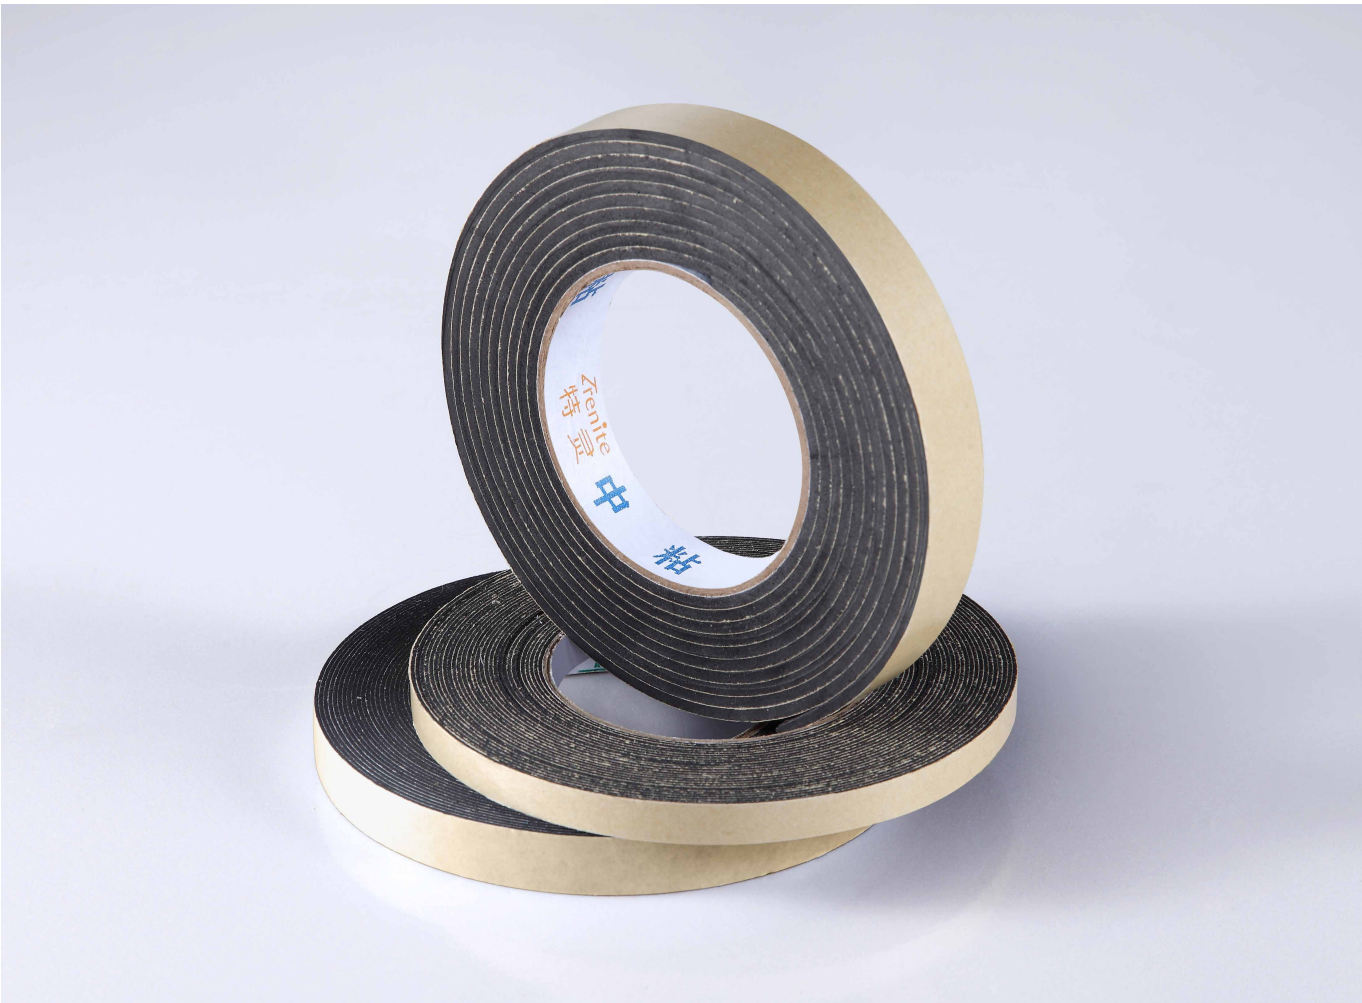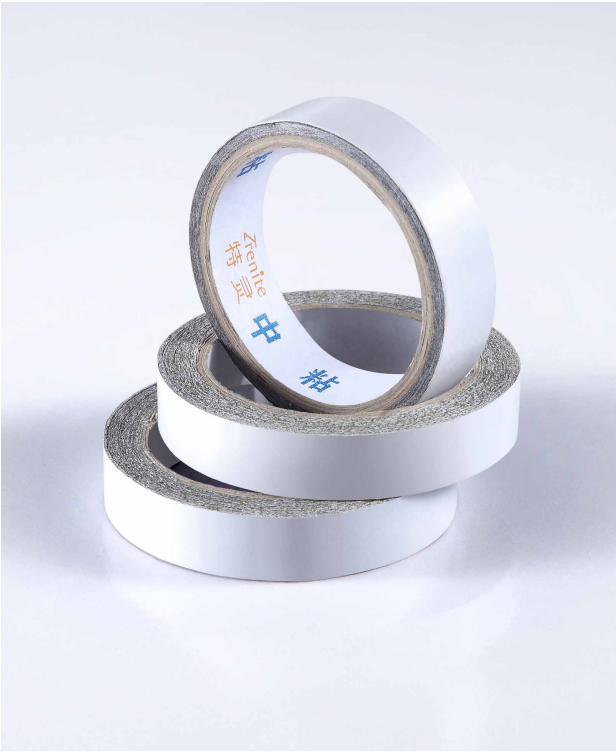


Product parameters

Model/ Specification	tape thickness	viscosity	Applicable surface treatment	Product Description
JNZ0110	1mm	Medium viscosity	External wall spraying partition	Single sided, 10 meters per roll
JNG0110	1mm	High viscosity		Single sided, 10 meters per roll
JNZ0110	1mm	Medium viscosity		Double sided, 10 meters per roll
JNG0110	1mm	High viscosity		Double sided, 10 meters per roll

Illustration:

- sold by box;
- The thickness and width of the product can be customized according to customer needs.





Washi tape (JH series)

Product Description

Washi tape is based on Japanese paper and has characteristics of water resistance, solvent resistance, quick adhesion, easy peeling, no residue, easy to tear by hand, and convenient writing; Especially suitable for outdoor work and has a good line separation effect.

Product features

Good initial adhesion, good holding power, easy to adhere to various surfaces, low labor intensity, can firmly fix the masking film in the required position, avoid sliding, falling off, etc.

Application area

It is mainly suitable for the masking function in indoor and outdoor decoration, architectural decoration, automobile spray painting and other scenes.




Product parameters

Model/ Specification	tape thickness	viscosity	Applicable surface treatment	Packing quantity (roll/box)	Product color
JHZ10018	0.10mm	Medium viscosity	This tape is suitable for painting work with pigments and paint systems containing solvents or water.	180	Orange
JHZ10020	0.10mm			165	
JHG10018	0.10mm	High viscosity		180	
JHG10020	0.10mm			165	

Illustration:

- The settlement unit is box;
- The regular color of the product is orange. If customers have special requirements, the width and color can be customized.



## Masking film tape (JD series)

### Product Description

Masking film tape is made of masking paper, paper tape or fabric-based tape bonded with easy-to-tear PET film .

### Product features

Easy to apply and peel off, with a large shielding and protection area, different film width specifications can be provided according to customer needs. Depending on the types of tape used, it can be used in different processes and environments in a targeted manner, and is extremely convenient to use.

### Application area

Widely used to provide large-area paint and spray masking protection for indoor and outdoor decoration and maintenance.

Just a few steps to easily solve the shading problem



Fixing Tape




Unfold the film



Easy to tear by hand



Soft touch self-adhesive

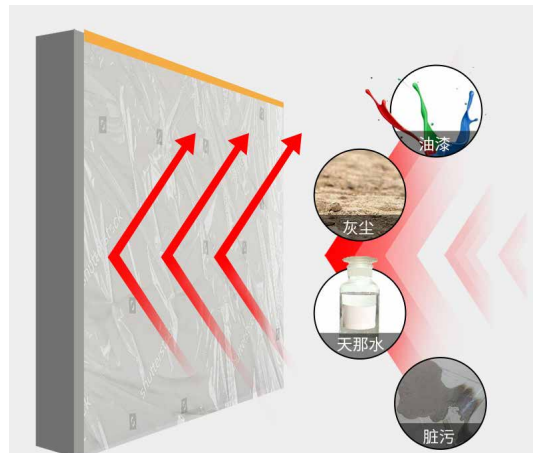


### Product parameters

Model/ Specification	tape thickness	Expand width	viscosity	Applicable scenarios	Product color
JDZ04055	0.10mm+0.04mm	550mm	Medium viscosity	Indoor and outdoor decoration work area that need to be shielded	Orange+transparent
JDZ04100	0.10mm+0.04mm	1000mm			
JDZ04150	0.10mm+0.04mm	1500mm			
JDZ04180	0.10mm+0.04mm	1800mm			
JDZ04240	0.10mm+0.04mm	2400mm			

Illustration:

- The settlement unit is box;
- The product color and specifications can be customized according to customer specific requirements.





Zrenite 特灵  
KIN LONG

## Glass frosted film (JP series)

### Product Description

Glass frosted decorative film assists in interior design, can change the monotonous and transparent image of ordinary glass and beautify office partitions; Mainly used to decorating indoor and outdoor glass, to add beauty to both indoor and outdoor .

### Product features

Frosted glass film is light-transmissive and opaque, available in variety of colors, energy saving and privacy protection, and can be easily replaced.

### Application area

Mainly suitable for office partitions, balconies, bathrooms, glass sliding doors, windows, and glass partitions.




### Product parameters

Model/ Specification	tape thickness	viscosity	Applicable scenarios	Length of each roll	Product color
JPD08900	0.08mm	Low viscosity	Office, balcony, bathroom door, glass sliding door, window and other glass that need to increase privacy and decoration	50m	Frosted
JPJ20900	0.20mm	static electricity			

Illustration:

- Settlement unit is square meters;
- The regular width of the product is 900mm and 1200mm, and other widths and colors can be customized if needed





## Glass frosted film (JP series)

### Product Description

Glass frosted decorative film assists in interior design, can change the monotonous and transparent image of ordinary glass and beautify office partitions; Mainly used to decorating indoor and outdoor glass, to add beauty to both indoor and outdoor .

### Product features


Frosted glass film is light-transmissive and opaque, available in variety of colors, energy saving and privacy protection, and can be easily replaced.

### Application area

Mainly suitable for office partitions, balconies, bathrooms, glass sliding doors, windows, and glass partitions.







## Glass frosted film (JP series)

### Product Description

Glass frosted decorative film assists in interior design, can change the monotonous and transparent image of ordinary glass and beautify office partitions; Mainly used to decorating indoor and outdoor glass, to add beauty to both indoor and outdoor .

### Product features

Frosted glass film is light-transmissive and opaque, available in variety of colors, energy saving and privacy protection, and can be easily replaced.

### Application area


Mainly suitable for office partitions, balconies, bathrooms, glass sliding doors, windows, and glass partitions.




Model No.: JPD20900-16




Model No.: JPD20900-17

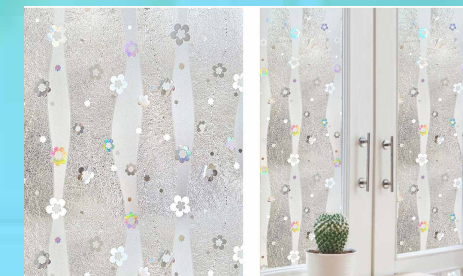


Model No.: JPD20900-18

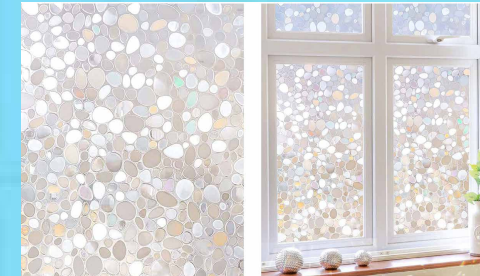


Model No.: JPD20900-19

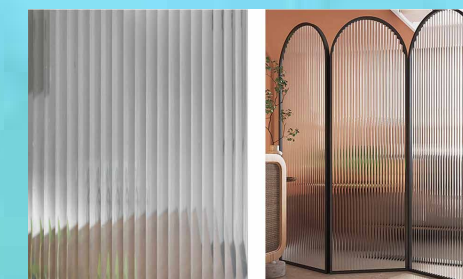


Model No.: JPD20900-20

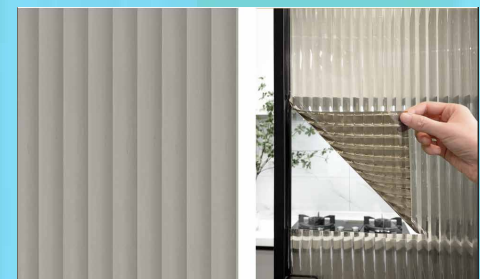

Model No.: JPD20900-21

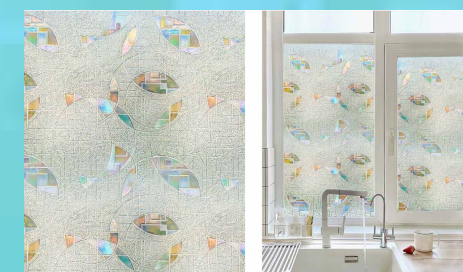

Model No.: JPD20900-22

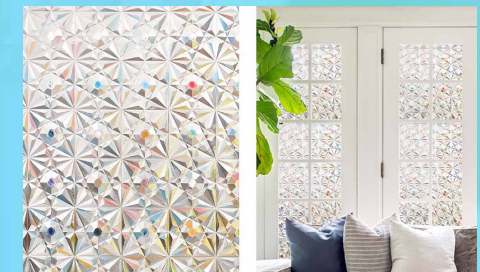

Model No.: JPD20900-23




Model No.: JPD20900-24



Model No.: JPD20900-25





Glass art film (JQ series)

Product Description


Glass art film is generally made of PET material and is mainly used for glass decoration. It has high strength, and tensile strength, high elongation, acid resistance, and alkali resistance, and can maintain good physical properties at high and low temperatures.

Product features

It can add color to the glass. When the glass explodes, it can reduce the damage caused by glass fragments to the human body and reduce the losses caused by self explosion

Application area

Mainly suitable for glass decoration in commercial buildings, residential buildings, hotels, hospitals, restaurants, and entertainment venues.

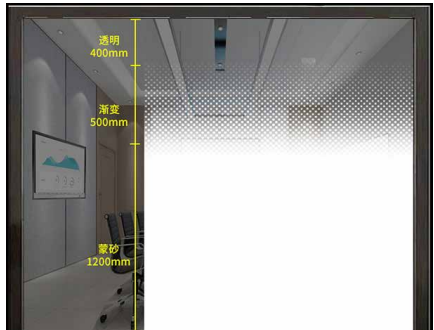


Product parameters

Model/ Specification	tape thickness	viscosity	Applicable scenarios
JQG02500	2mil	High viscosity	Suitable for glass decoration gradient film in public areas such as offices and conference rooms where privacy is required
JQG02500	2mil	High viscosity	Glass decorative film suitable for shower rooms, kitchens and other areas that require privacy

Illustration:

- The settlement unit is square meters, and many colors and patterns to choose from;
  - If customer have special requirements, colours, patterns, and widths can be customised.
- Note: The transliteration of mil is mil, which is the thickness unit of glass anti decorative film, 2.0mil ≈ 0.051mm.





## Packing Tape (JD series)

### Product Description

Packing tape is suitable for general product packaging, sealing bonding, gift packaging, etc.

### Product features

The product has strong adhesion and good weather resistance, and is produced with thicker films and strong glue.

### Application area

It is widely used in packaging, sealing and product bundling packaging in logistics, hardware, home appliances, express delivery and other industries.



### Product parameters

Model/Specification	tape thickness	width	Applicable scenarios	Product color	Packing quantity
JFG40048	0.04mm	48mm	Packaging and sealing	transparent	100 rolls
JFG48048	0.048mm	48mm	Packaging and sealing	transparent	100 rolls
JFG60048	0.06mm	48mm	Packaging and sealing	transparent	100 rolls

### Illustration:

- The settlement unit is box, and selling by box.
- The product color and specifications can be customized according to customer's special requirements; printing can be customised according to customer's needs.



## Packing Belt (JD series)

### Product Description

This product is made of raw material polypropylene and produced with advanced embossing technology, which makes the strapping belt straight and stable, the belt feeding is smoother, which improves strapping efficiency, and reduces losses.

### Product features

Light weight, long length, strong tensile strength, bright color, and good adhesion  
Good plasticity, not easy to crack, good stability, and strong tensile resistance;

### Application area

Plastic strapping tape is widely used for wrapping ,bundling and fixing in industries such as industrial packaging and furniture packaging;

Plastic steel strapping tape is widely used for wrapping , bundling and fixing in industries such as glass, steel, wood, and stone.



### Product parameters

Model/ Specification	Width	Tape thickness	Length of each roll	Characteristic	Applicable scenarios	Color
JFJ09012	0.12mm	0.09mm	1500m	Plastic, machine used	Packaging, bundling, and fixing	Yellow
JFS09016	0.16mm	0.09mm	1000m	Plastic steel, hand-held	Glass, stone and other materials wrapping, bundling and fixing	Green

Illustration:

- The settlement unit is roll;
- The product color and specifications can be customized according to customer requirements;customer company name can be printed.





Scan for more information

**Create Values for the Customers  
Sincerely and Whole-heartedly**

Unique value is created by professionalism, but no future  
shall be created by speculation.

