

Typical Catalogue of Hotel Hardware











Guangdong Kinlong Hardware Products Co., Ltd.

No.3, Jian Lang Rd., Daping, Tangxia Town, Dongguan City, china.

T: 0086-769-82166666 82136666 F: 0086-769-82955240 82955241

E: mail@kinlong.com H: www.kinlong.com

Lock hardware typica





School hardware configuration ma



Shower room products typical picture book



Bathroom hardware typical picture book



Hospital hardware typic picture book



Hardcover room hardware configuration map



Shower room bathroom hardware scene integrated product atlas



Furniture hardware products atlas

Kail transit hardwar



notel hardware configuration solutior



Trane protective film product atlas



Fire door hardware integrated atlas

Contents

Engineering case	05
Hotel hardware configuration solution	n07
Economy hotel	11
Business hotel	19
Star hotel	27
Door lock hardware Series	
Anti theft door lock series	39
Entry door lock series	45
Indoor door lock series	47
Bathroom door lock series	53
Escape push bar lock series	55
Fire lock series	57
Tube well lock series	59
Hardware accessories Series	61
Door control hardware series	65
Sliding door hardware series	67
Handle Hardware Series	69
Electric ground spring series	71
Ground spring and supporting hardware serie	s73
electric door closer series	75
Door closers series	77
Fire linkage door closer series	79
Shower enclosure	81
Bathroom hardware series	
Furniture hardware series	97

For more product information, please scan the QR code in the image above

STOCK CODE: 002791

TO IMPROVE THE HUMAN **BEING'S LIVING CONDITIONS AND** MAKE KINLONG THE SYNONYM FOR HIGH-QUALITY.

 $\mathsf{More}\;\mathsf{than}\; \textcolor{red}{\mathbf{900,000}}_{\mathsf{m}^2}$ production area.

More than **60** subsidiaries.

More than 1000 sales offices both in domestic and overseas.

More than **16,000** employees.

ESTABLISHING BENCHMARK AND PURSUING EXCELLENCE

Kinlong was established in 2003 and is a company engaged in design and research, manufacturing and sales of construction and building products. We are committed to provide high-quality products and services. After years of development, Kinlong has become a reputable brand in the construction industry.

Kinlong industrial park has an area of more than 900,000 square meters and has an employment of more than 16000 staff. Kinlong owns more than 60 subsidiaries, and with over 1000 sales branches in the domestic and overseas markets. The company has more than 20,000 categories of products, which has been sold to more than 100 countries and areas. Kinlong, with it's sophisticated production management, provides customers with integrated solutions for different functional buildings.

Focusing on providing integrated construction and building accessories and diversified products, Kinlong continues to meet customer needs and market changes with the sales model of "R&D + manufacturing + service", and sets up its own marketing networks to directly provide customers with products and technical services. With years of precipitation and accumulation, Kinlong is at the forefront of the industry.

Over the years, Kinlong has been embracing the philosophy of "Unique value is created by professionalism, but no future shall be created by speculation". This has made Kinlong standing on the leading position in construction hardware market. Kinlong has provided products and services for many famous buildings around the world, and the landmark buildings of countless cities have become the pride and glory of Kinlong people.

To every designer, engineer and company committed in construction industry, Kinlong is always the most trustworthy and reliable partner.

Social Responsibility



For more than ten years, Kinlong has not forgotten to give back to the society while developing itself. By the end of 2023, more than 90 kinlong social charity schools have been donated and built in remote and backward areas.





INNOVATION AND ENTERPRISING **INDUSTRY BENCHMARK**

KINLONG KEEPS MAKING PROGRESS BY INNOVATION, BY WHICH WE HAVE OBTAINED **RECOGNITION AND HIGH PRAISE** FROM STATE **DEPARTMENTS, GOVERNMENT** UNITS AND ALL SECTORS IN THE SOCIETY, AND WE HAVE GOT MANY ACHIEVEMENTS.



Kinlong adheres to the philosophy that Unique value

can only be created by professionalism, speculation

has no future. Our enterprise core value is to respect

Respecting science; Striving for coexistence and all-

win; Promoting constant innovation; Pursuing sincerity

and trustworthiness. and we always insist making

innovation, breaking through and making progress,

increasing our capacity of research, by which we have

obtained recognition and praise from government

departments, units and all areas in the society and get many achievements. We pay great attention to the

needs from our customers and the prospect of our

industry, consistently pursuing perfect, good quality,

excellent service and systematic solutions. Our quick

and accurate ability of handing over are always

Overseas and domestic authorized valid

patents are 1000 items.

In which, patents of invention are

100 items.

We took part in the standards compiling

Kinlong has overseas and domestic

registered trade mark of **500** is

ENTERPRISE REPRESENTATIVE HONOR

Second Prize in National Science and Technology **Progress Award**

First Prize in Huaxia Construction Science and Technology Award

Second Prize in Huaxia Construction Science and

Special Prize in China Steel Structure Association Science and Technology Award

First Prize in China Steel Structure Association Science and Technology Award

Innovation Award in China Steel Structure Association Science and Technology Award

The most influential brand of Jinxuan Award in the construction door, window and curtain wall industry for four consecutive sessions:

2021 TOP500 Preferred Supplier of Comprehensive leading the market. Strength of Chinese Real Estate Development **Enterprises-Smart Community Service Category**

National High-Tech Enterprise

REPRESENTATIVE R&D INNOVATION HONOR

National Intellectual Property Demonstration Enterprise

Laboratory center approved by the National Accreditation Board

Guangdong Provincial Enterprise Technology

Center and Provincial Engineering Center

MARKET BY GOOD QUALITY. EXCELLENT SERVICE. SYSTEMATIC SOLUTIONS AND QUICK AND ACCURATE ABILITY TO HAND OVER.

KINLONG IS LEADING THE



To Form a Full-chain Comprehensive Advantage

Professionally serve the market and create value for customers

Quality Comes from Profession



The company has a sound management system ,passed ISO9001, ISO14001, ISO45001 systems of BSI and have a testing laboratory accredited by the China National Accreditation Service for Conformity Assessment (CNAS). Till 31st October 2021, more than 90 products certifications have been obtained

Perfect Service and Quick Response



Kinlong utilizes more than 600 sales-services throughout the country and abroad sales team of more than 6,000 people, a nationwide installation and after-sales team, and more than 40 stock warehouses across the country to provide prompt response to our Clients . Local direct sales service, create the value to customers with sincerity and

Integrated service organization



R & D patent

There are more than 800 patents at home and abroad

R & D support

R & D Integration



Product category

It has more than 10000 products and a constantly updated product library

Product support

Product integration



Organization and team

More than 4000 sales service teams from more than 500 sales service institutions at home and abroad

Service support

Service integration



Integrated system

03

Stock storage system Professional installation team Perfect logistics distribution system Warehousing, logistics, installation support,

Warehousing, logistics, installation integration

Certificate of authority























Xi'an Jinsha International Hotel

O FIGURE L. MOMC P.

Suzhou Manlan Hotel



Guangzhou Changlong Xiangjiang Hotel



Xuzhou Hilton Garden Hotel



Nanjing Sheraton Hotel

Kinlong provides a full range of hardware solutions for eight scenes



Hotel hardware
(Catalogue)

Rail transit hardware

Shopping mall hardware






Office building hardware

School hardware



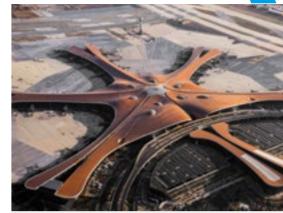

▲ Airport hardware

Hospital hardware





Fine decoration hardware




Solutions for hotels and guesthouse facilities

Hotel is a very important building. With the rapid development of economy, the selection of hotel door hardware is very important.

The management of the hotel will also reach a new height. The four-star and five-star hotels are required to reach the international level. The selection of hotel hardware should follow the following principles: comfort and beauty, scientific and intelligent, effective management, emergency evacuation, property protection, privacy protection and use safety.

Hotel projects have different levels and different applicable scenarios, including star rated hotels, resort hotels, business hotels, convenient hotels, economical hotels, normal hotels, apartment hotels, quarantine hotels, etc. There are many hardware products involved in the hotel project, and there are many requirements for the products. The hotel belongs to a scene with complicated traffic, and it needs to select medium and high-end hardware products. It requires fast delivery, fast response, high efficiency, and ccst-efficiency.

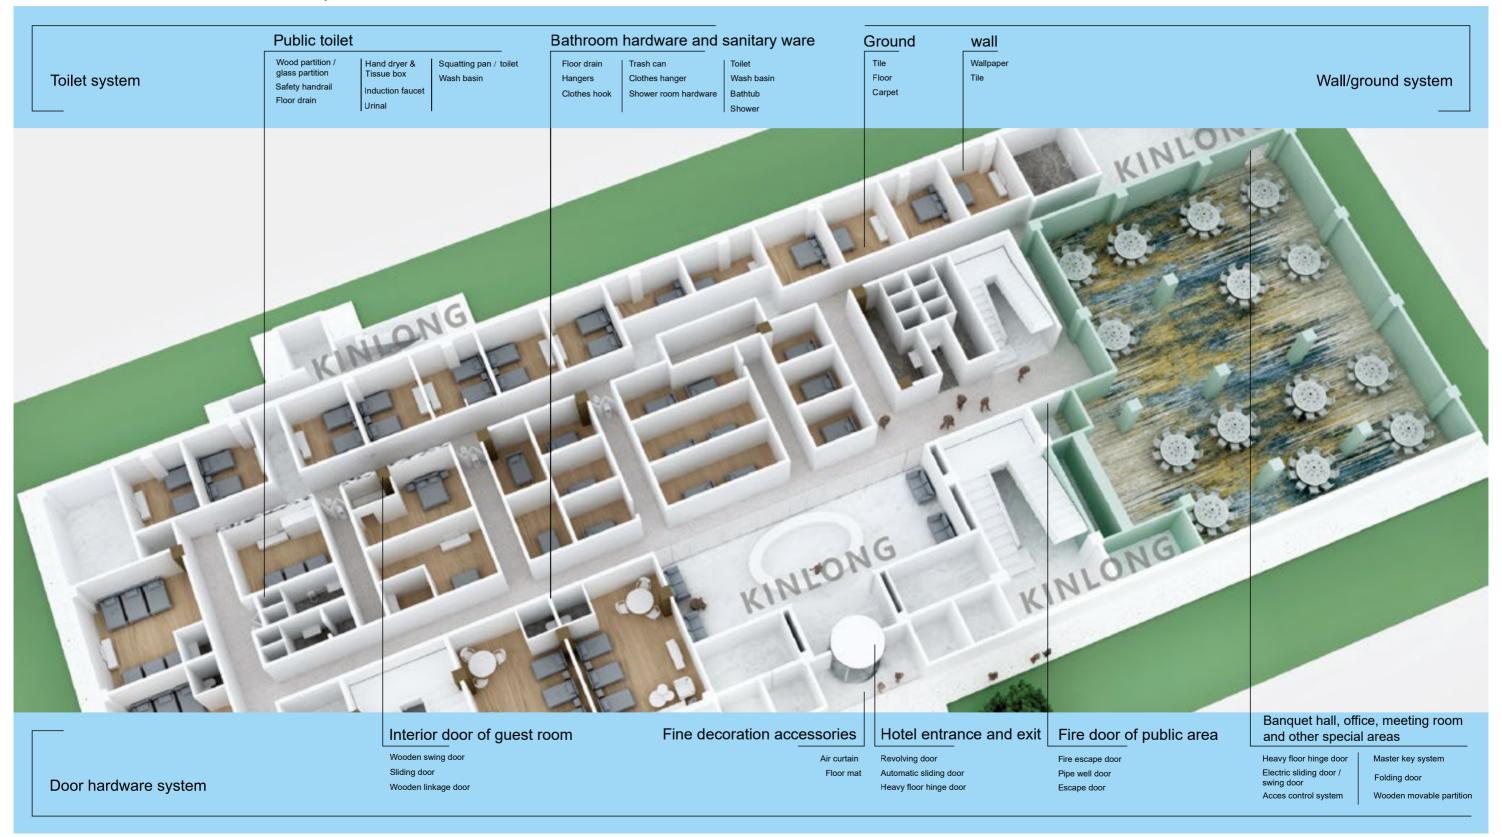


Typical hardware configuration Economical hotel




11


Hardware configuration of lobby door

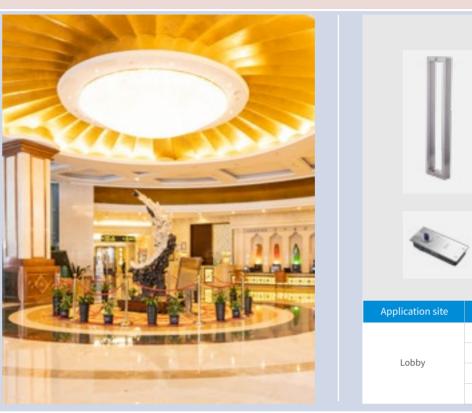



Hardware configuration of public toilet door

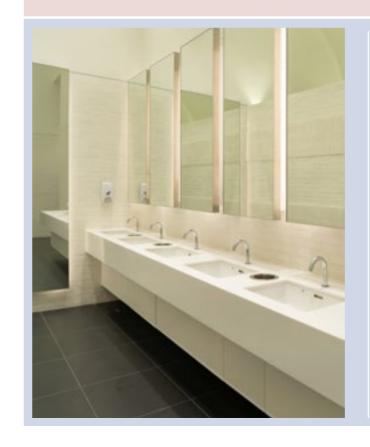

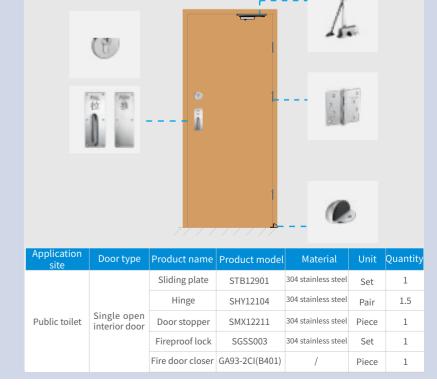


Hardware configuration of guest room door

Hardware configuration of meeting room door







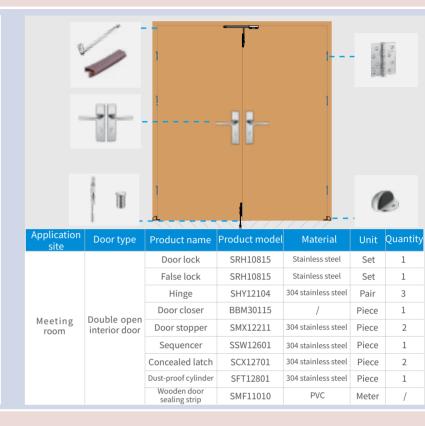



Hardware configuration of guest room bathroom door

Hardware configuration of office door





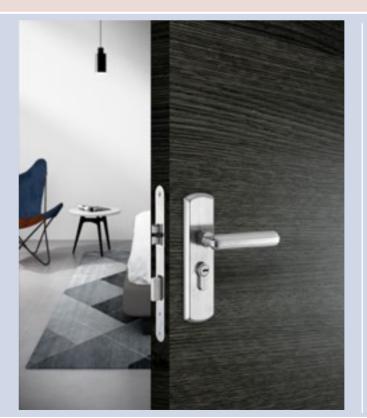


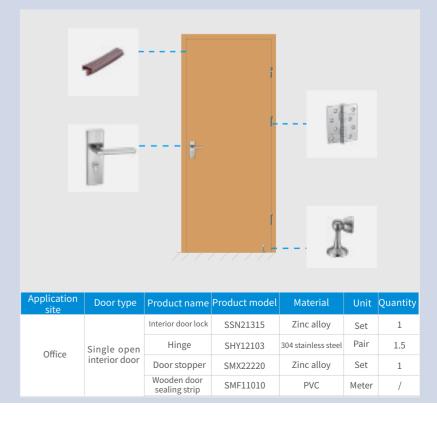


Hardware configuration of escape exit door

Hardware configuration of linen room door



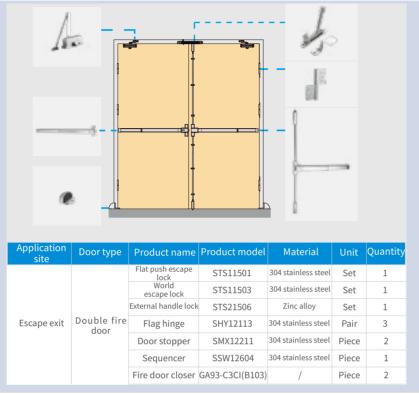





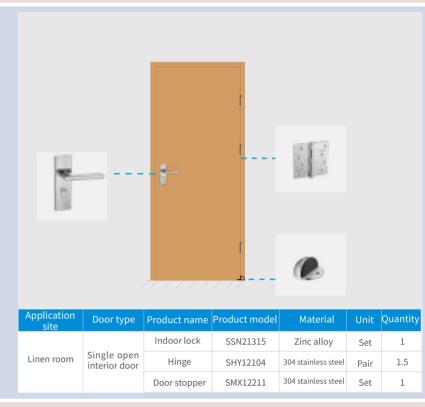

Hardware configuration of fire door in staircase

Hardware configuration of tube well door

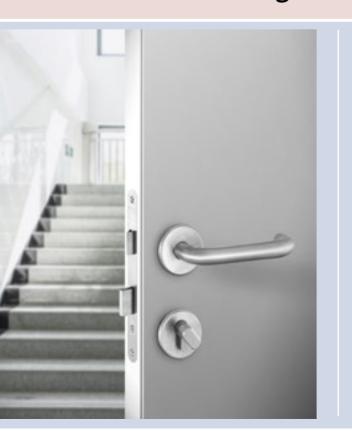

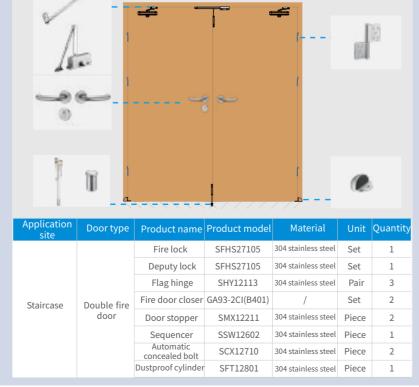





Bathroom hardware configuration of public toilet

Bathroom hardware configuration in guest rooms



Product	Model	Picture	Material
Induction faucet	WSZ12150	7	304 stainless steel/ matte
Angle valve	WSZ71090	The state of the s	304 stainless steel/ matte
Pop-up drain	WSZ96010	Ť	Brass/chrome plated
Drain pipe	WSZ96210	Y	Brass/chrome plated
Tissue box	WZH30060		ABS/ white
Hand dryer	WDQ20010	10	ABS/ white
Soap dispenser	WFJ10020	T De	ABS/ transparent
Floor drain	WDL3012C		304 stainless steel/ chrome plated



Product	Model	Picture	Material
Shower enclosure	LTS00521		Aluminum alloy/ Asian bank
Shower mixer	WSZ34180	1-	304 stainless steel/ matte
Basin faucet	WSZ19130	-	Brass/chrome plated
Angle valve	WSZ71090	N.	304 stainless steel/ matte
Pop-up drain	WSZ96010	Ĭ	Brass/chrome plated
Drain pipe	WSZ96210	J	Brass/chrome plated
Tissue holder	WZH10150	T	Aluminum alloy
Towel rack	WWG52040	12444	Aluminum alloy
Floor drain	WDL3012C		304 stainless steel/ chrome plated
Clothes hook	WYG20020-3	chelec	Zinc alloy/chrome plated
Makeup mirror	WHJ10040	0	Copper/chrome plated
Clothes hanger	WFJ2102A	2	304 stainless steel/ mirror light
Soap dispenser	WFJ10020	9	ABS/ transparent
Hair dryer	WDQ10020	ন্ত্ৰ	ABS/ white

Hardware configuration of guest room furniture




Product	Model	Picture	Material
Cabinet door hinge	WJY1201A	3	Cold rolled steel plate/nickel plating
Drawer guide rail	WJH21010	1	Cold rolled steel plate/black
Cabinet door handle	WJL22050		Aluminum alloy/ matte
Rebound device	WJF13010		Plastic/white
Clothes rod tube	WJF10010	7	Aluminum alloy/ silver oxide
Clothes rod seat	WJF11010	1	Zinc alloy/ chrome plated

Typical hardware configuration of Business Hotel




19


Hardware configuration of lobby door

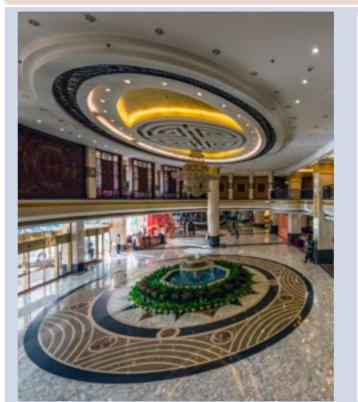



Hardware configuration of public toilet door

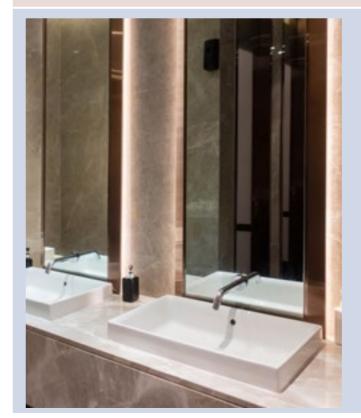

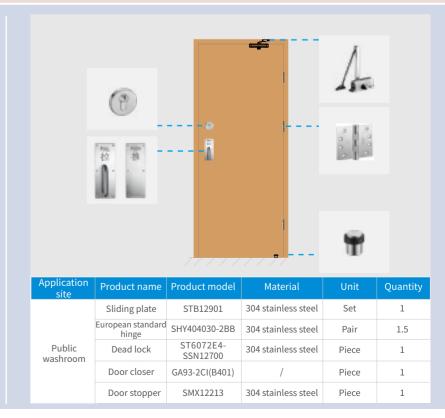



Hardware configuration of guest room door

Hardware configuration of meeting room door





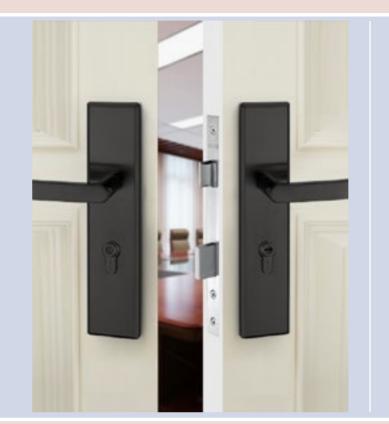


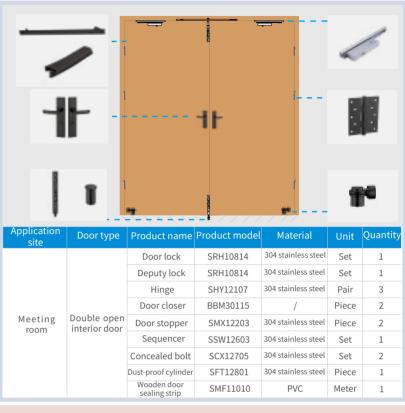



Hardware configuration of guest room bathroom door

Hardware configuration of office door



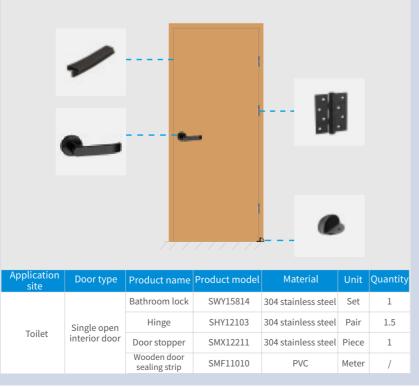


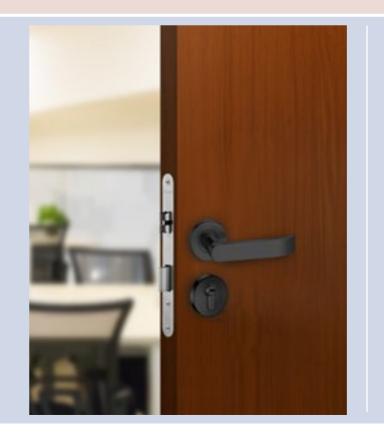


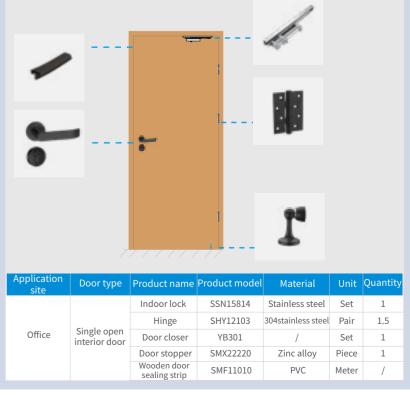


Hardware configuration of escape exit door

Hardware configuration of linen room door

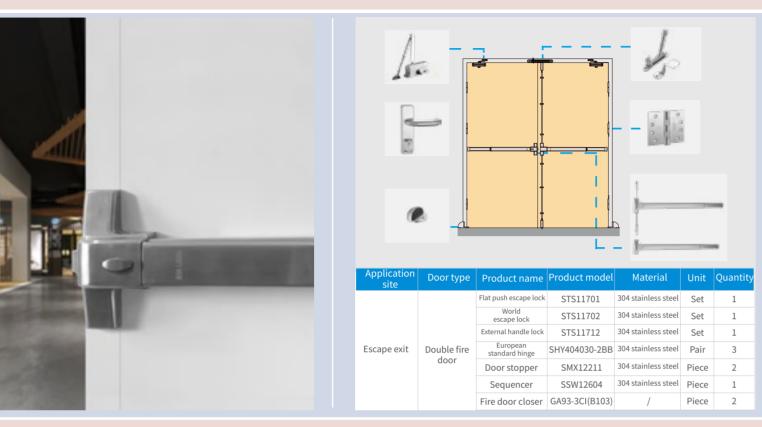


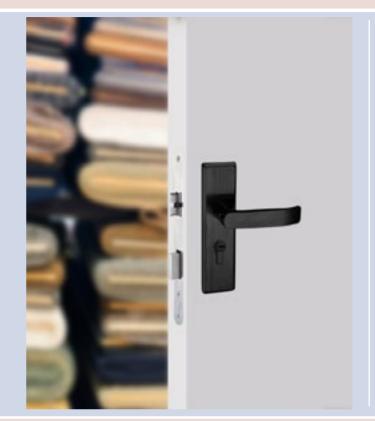

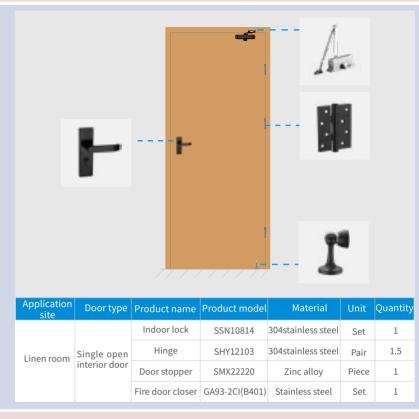


Hardware configuration of fire door in staircase

Hardware configuration of pipe well door

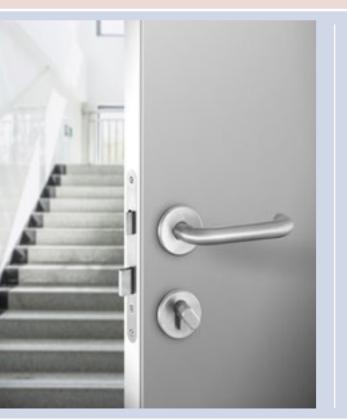





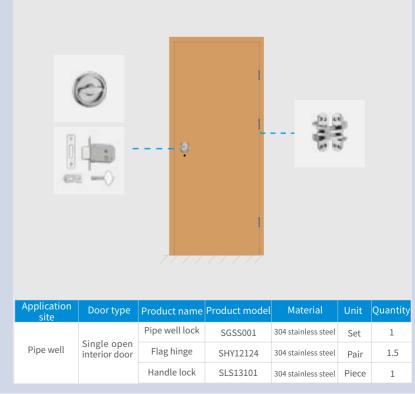

Bathroom hardware configuration of public toilet

Bathroom hardware configuration in guest rooms



Product	Model	Picture	Material
Induction faucet	WSZ45940	9	Brass/ chrome plated
Angle valve	WSZ7105B		304 stainless steel/ matte
Pop-up drain	WSZ96010	Ť	Brass/ chrome plated
Drain pipe	WSZ96220	V	Brass/ chrome plated
Tissue box	WZH30070		ABS/white
Hand dryer	WDQ20040	18	ABS/white
Soap dispenser	WFJ10030	The second	ABS/transparency
Floor drain	WDL39160		Brass/ chrome plated




Product	Model	Picture	Material
Shower enclosure	LHP00131		304 stainless steel/ matte black
Shower mixer	WSZ39250		304 stainless steel/ matte black
Basin faucet	WSZ19070	7	Brass/matte black
Angle valve	WSZ7105B		304 stainless steel/ matte
Pop-up drain	WSZ96010	Ť	Brass/ chrome plated
Drain pipe	WSZ96220	U,	Brass/ chrome plated
Tissue holder	WWG53210		304 stainless steel/ matte black
Towel rack	WWG53040		304 stainless steel/ matte black
Floor drain	WDL39160		Brass/ chrome plated
Clothes hook	WYG10060-3		Zinc alloy/ matte black
Makeup mirror	WHJ10080	Q	Brass/ chrome plated
Clothes hanger	WFJ2102A	2	304 stainless steel/ mirror light
Soap Dispenser	WFJ10030		ABS/transparent
Hair dryer	WDQ10050	T	ABS/white

Hardware configuration of guest room furniture




Product	Model	Picture	Material
Cabinet door hinge	WJY1202A	4	Cold rolled steel plate/nickel plating
Drawer guide rail	WJH22010	11	Cold rolled steel plate/black
Cabinet door handle	WJL22080		Aluminum alloy /matte
Rebound device	WJF13030	P	Plastic/white
Clothes rod tube	WJF10020		304 stainless steel /mirror light
Clothes rod seat	WJF11010	1	Zinc alloy/ chrome plated

Typical hardware configuration of star hotels

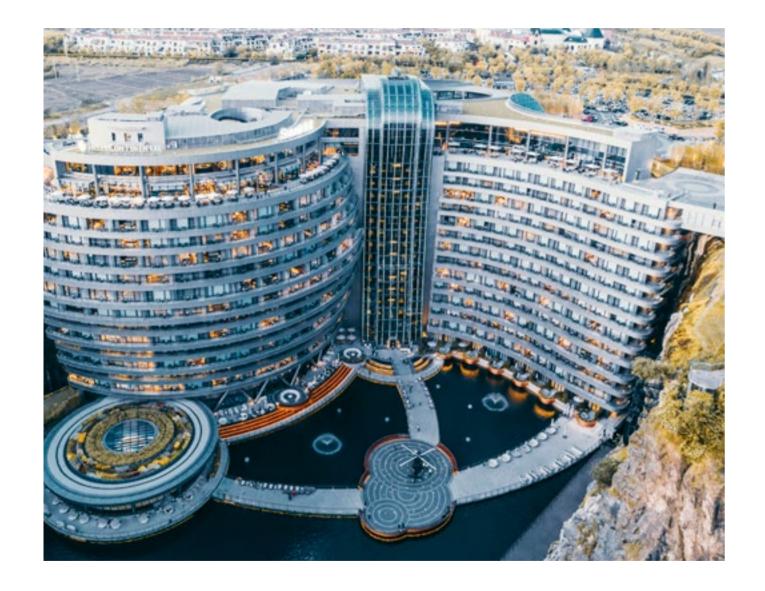

27


Hardware configuration of lobby door

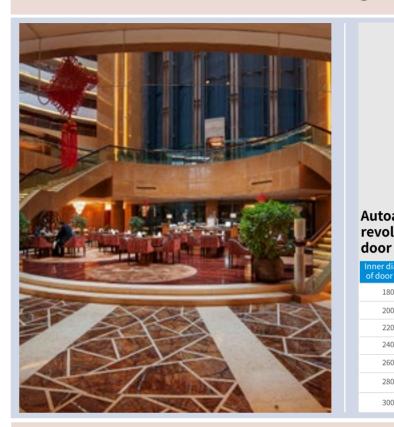



Inner diameter of door (mm)	Outer diameter of door (mm)	Passage height (mm)	Canopy height (mm)	Entrance width SJ3000A (mm)	Entrance width SJ4000A (mm)
1800	1800	2200~3000	70	780	1195
2000	2083	2200~3000	70	880	1335
2200	2283	2200~3000	70	980	1475
2400	2483	2200~3000	70	1080	1615
2600	2683	2200~3000	70	1180	1755
2800	2883	2200~3000	70	1280	1895
3000	3083	2200~3000	70	1380	2035

Hardware configuration of public toilet door

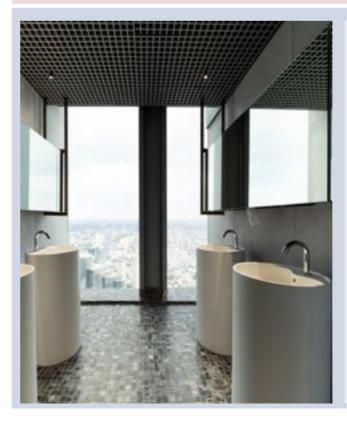




Hardware configuration of guest room door

Hardware configuration of meeting room door








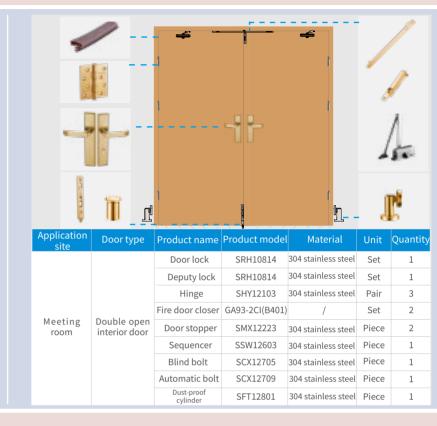

Hardware configuration of guest room bathroom door

Hardware configuration of office door



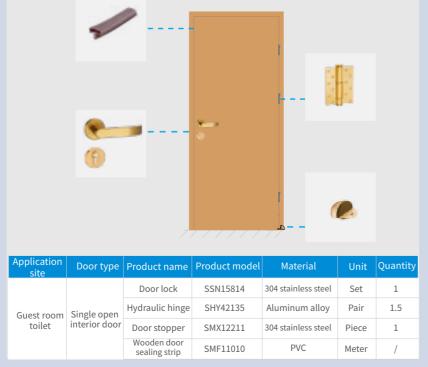







Hardware configuration of escape exit door

Hardware configuration of linen room door



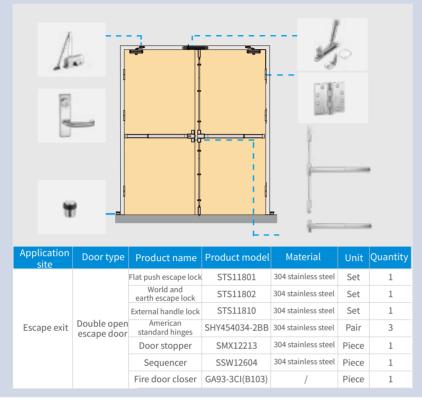




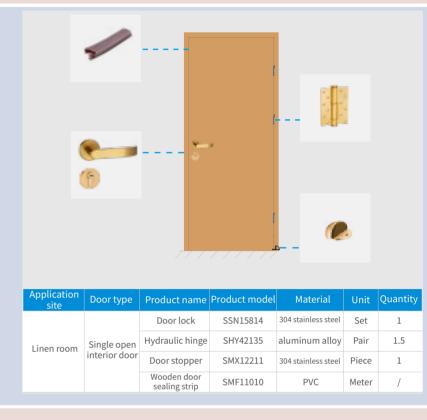


Hardware configuration of fire door in staircase

Hardware configuration of pipe well door

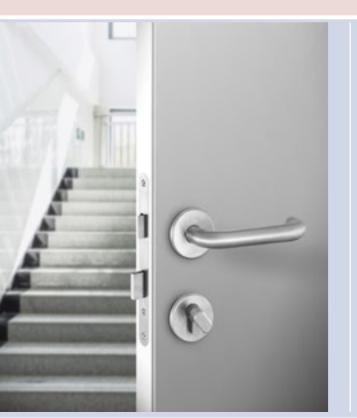





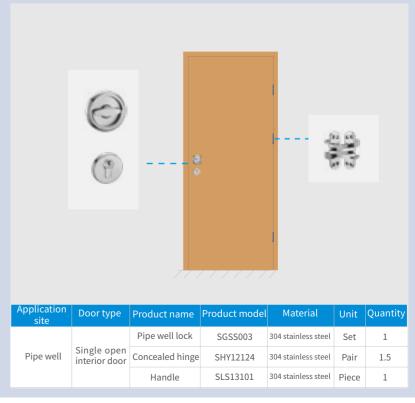

Bathroom hardware configuration of public toilet


Product	Model	Picture	Material
Induction faucet	WSZ45982	1	brass / chrome plated
Angle valve	WSZ7110H/C	1	304 stainless steel/ matte
Pop-up drain	WSZ96040	Ĭ	brass/ chrome plated
Drain pipe	WSZ96220	W?	brass/ chrome plated
Tissue box	WZH20080	=	304 stainless steel/ matte
Hand dryer	WDQ20030		ABS/white
Soap dispenser	WFJ41010	•	ABS/white
Perfume dispenser	WFJ51010	N.	ABS/white
Floor drain	WDL3931C-75		Brass/ chrome plated

Hardware configuration of guest room furniture



Product	Model	Picture	Material
Cabinet door hinge	WJY1202A	3	Cold rolled steel plate/nickel plating
Drawer guide rail	WJH22010	11	Cold rolled steel plate/black
Cabinet door handle	WJL22120		Aluminum alloy/ Brushed bronzing gold
Rebound device	WJF13030	P	Plastic/white
Clothes rod tube	WJF10020		304 stainless steel/ mirror light
Clothes rod seat	WJF11010	1	Zinc alloy chrome plated


Bathroom hardware configuration in guest rooms

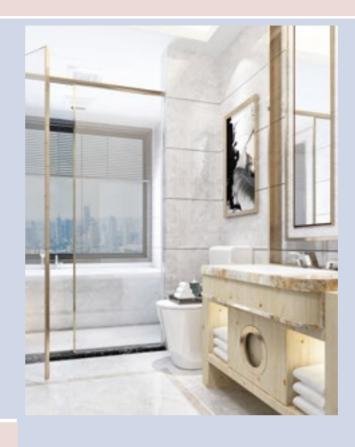

Product	Model	Picture	Material
Shower enclosure	GZT00141		304 stainless steel/ golden
Shower mixer	WSZ3504A	-	304 stainless steel/golden
Basin faucet	WSZ19210	7	Brass/golden
Angle valve	WSZ7110H/C	*	304 stainless steel/ matte
Hand the cartons	WZH20080	=	304 stainless steel/ matte
Pop-up drain	WSZ96040	Ī	brass/ chrome plated
Drain pipe	WSZ96220	U	Brass/ chrome plated
Paper towel rack	WZH1009A		304 stainless steel/ golden
Towel rack	WWG63040		304 stainless steel/ golden
Floor drain	WDL60110	-	304 stainless steel/ matte
Hook rack	WYG20040-3	UUU	Zinc alloy/golden
Makeup mirror	WHJ20060	⊶ (Brass/ chrome plated
Clothes hanger	WFJ2102A		304 stainless steel/ mirror light
Soap dispenser	WFJ41020	1	ABS/white
Hair dryer	WDQ10060		PC/white


Hardware configuration of hotel bathroom and indoor partition door (ordinary sliding door)



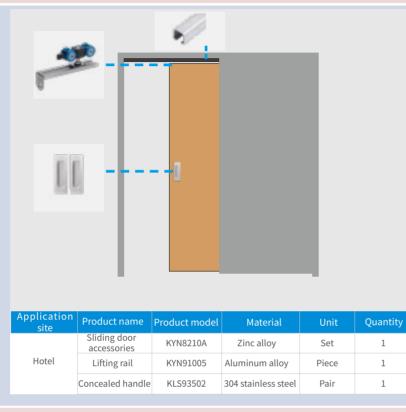

Hardware configuration of hotel public area partition door (folding door)




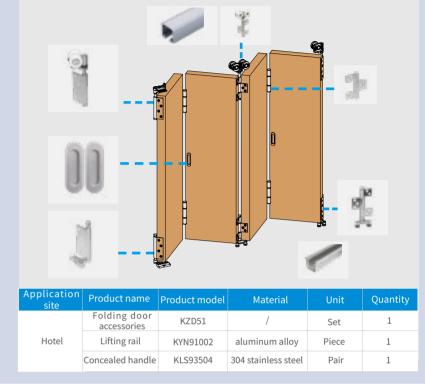

Hardware configuration of hotel bathroom door (linkage door)


35




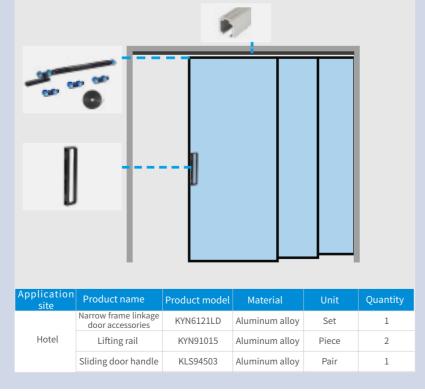

Hardware configuration of hotel bathroom door (buffer + linkage sliding door)



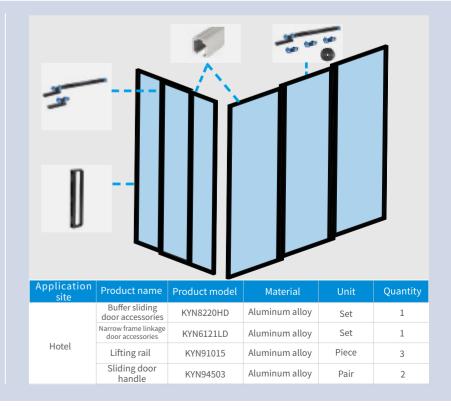

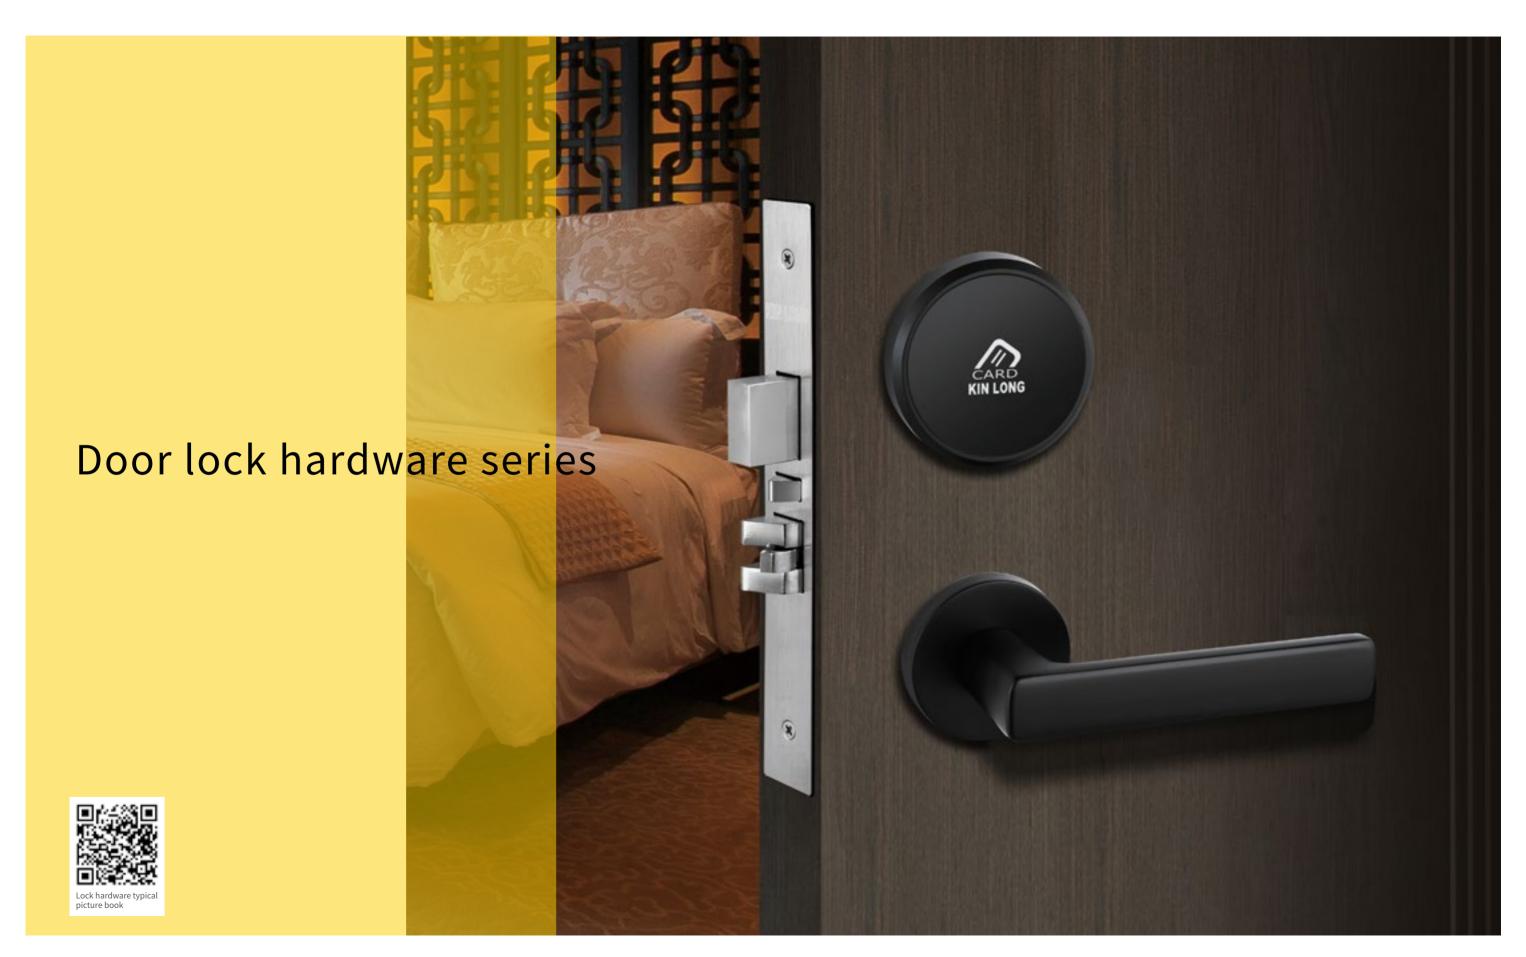

Hotel door lock series



Hotel Door Lock Series

Hotel door lock series



Main material: 304 stainless steel

Applicable door thickness: 40-50mm, customized when exceed.

Surface treatment: stainless steel hairline, matte black

Opening mode: Sensor card, emergency key.

Lock body specification: DST6295C

Door opening direction: Distinguish between left and right, between


inside and outside.

Application scenarios: hotels, apartments, dormitories, etc.

Door lock System: Kinlong Hotel Door lock management System (One







Applicable door thickness: 40-50mm, customized when exceed. Surface treatment: stainless steel hairline, matte black

Lock body specification: DST6295C

Door opening direction: Distinguish between left and right, between


inside and outside.

Application scenarios: hotels, apartments, dormitories, etc.

Door lock System: Kinlong Hotel Door lock management System (One



Stainless steel hairline



Main material: stainless steel Applicable door thickness: 40-50mm, customized when exceed.

Surface treatment: stainless steel hairline Opening mode: Sensor card, emergency key.

Lock body specification: DST6295B

Door opening direction: Distinguish between left and right, between

Application scenarios: hotels, apartments, dormitories, etc.

Door lock System: Kinlong Hotel Door lock management System (One



Main material: stainless steel

Applicable door thickness: 40-50mm, customized when exceed.

Surface treatment: stainless steel hairline, matte black

Opening mode: Sensor card, emergency key.

Lock body specification: DST6295B

Door opening direction: Distinguish between left and right, between inside and outside.

Application scenarios: hotels, apartments, dormitories, etc.

Door lock System: Kinlong Hotel Door lock management System (One

card).

Hotel lock Gun gray hairline

Matte black

Hotel door lock series

SGY27415 Main material: Zinc alloy +304 stainless steel.

Applicable door thickness: 40-50mm, customized when exceed .

 $\label{thm:condition} {\sf Surface\ treatment:\ Gun\ gray\ hairline\ ,} {\sf Matte\ black.}$

Opening mode: Sensor card, emergency key.

Lock body specification: DST6295C

Door opening direction: Distinguish between left and right, between

inside and outside .

 $\label{lem:policy} \mbox{Application scenarios: hotels, apartments, dormitories, etc} \ .$

Door lock System: Kinlong Hotel Door lock management System

(One card).



Main material: 304 stainless steel.

Applicable door thickness: 40-50mm, customized when exceed .

 $\label{thm:condition} {\it Surface treatment: Gun gray hairline ,} {\it Matte black}.$

Opening mode: Sensor card, emergency key.

Lock body specification: DST6295A


Door opening direction: Distinguish between left and right, between

inside and outside .

Application scenarios: hotels, apartments, dormitories, etc.

Door lock System: Kinlong Hotel Door lock management System

(One card).

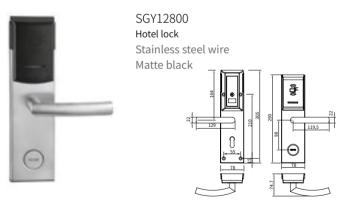

Main material: 304 stainless steel.

Applicable door thickness: 40-50mm,customized when exceed .

Surface treatment: Stainless steel hairline, Matte black.

Opening mode: Sensor card, emergency key.

Lock body specification: DST6295A

Door opening direction: Distinguish between left and right, between

inside and outside.

Application scenarios: hotels, apartments, , dormitories, etc .

 ${\tt Door \, lock \, System: \, Kinlong \, Hotel \, Door \, lock \, management \, System}$

(One card).



Main material: aluminum alloy.

Applicable door thickness: 40-50mm, customized when exceed.

Surface treatment: Champagne gold, Matte black.

Opening mode: Sensor card, emergency key .

Lock body specification: ST6068Z

 $\label{thm:constraint} \mbox{Door opening direction: Distinguish between left and right, between}$

nside and outside .


Application scenarios: hotels, apartments, dormitories, etc.

Door lock System: Kinlong Hotel Door lock management System

(One card).

41

Noted:below lock body is not optional, its for special style door lock

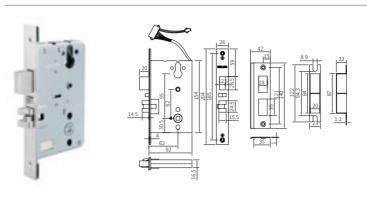

DST6295C Lock body

R/L


Passed the industry standard JG/T394-2012 standard test. Equipped with trident oblique bolt, anti-pry safety bolt.

Indoor quick escape function .

Distinguish between left and right

latch: Zinc alloy

Latch panel: stainless steel
Buckle plate: stainless steel

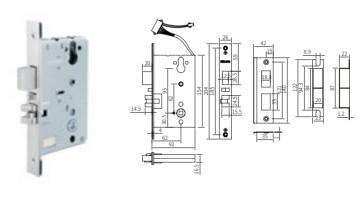

DST6295B Lock body




Passed the industry standard JG/T394-2012 standard test . Equipped with trident oblique bolt, anti-pry safety bolt.

Indoor quick escape function .

Distinguish between left and right

latch: Zinc alloy

Latch panel: stainless steel
Buckle plate: stainless steel

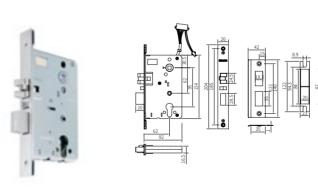

DST6295A Lock body




Passed the industry standard JG/T394-2012 standard test Equipped with trident oblique bolt, anti-pry safety bolt. .

Indoor quick escape function

Distinguish between left and right

latch: Zinc alloy

Latch panel: stainless steel
Buckle plate: stainless steel

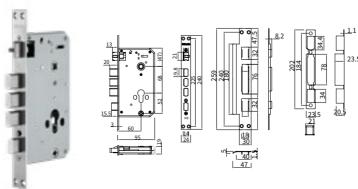

ST6068Z Lock body



Passed the industry standard JG/T394-2012 standard test

Stainless steel anti-theft lock tongue, trident oblique bolt
Reverse lock, quick escape

Safety tongue can only be opened indoors.

 $\label{thm:condition} \textbf{Suitable for hotels, apartments, dormitories and other occasions}$

Left and right

latch: 304 stainless steel.

Latch panel: 304 stainless steel.


Buckle plate: stainless steel.

Hotel door accessories series

SZN41000

Intelligent safe deposit box





- \cdot It has passed the test of the enterprise standard Q / JL 03-2019 intelligent safe deposit box for hotels
- · Applicable to hotels, etc
- \cdot User independent management function, high security, sub authorization management, etc
- \cdot The hotel lock card is shared with the safe deposit box card to realize the opening and closing of the induction card
- ·One click reset function, safe deposit box batch operation, low voltage alarm, APP management function, operation function customization

SKZ65001


Elevator controller



Card reading head (external)



Control panel (built-in)



- \cdot The elevator controller is composed of reading head, control board and separate floor control module
- \cdot Distinguish between standard mode and floor control mode. Please pay attention to the distinction when placing an order
- ·Floor control mode, need to distinguish auto floor selection and manual floor selection:
- · Automatic floor selection: Scan the guest card, can automatically arrive the specific guest room floor without choose. Scan other door card can choose floor manually.
- · Manual floor selection: Scan the guest card, can choose floor manually. Scan other door card can choose floor manually.
- · A floor control module can control up to 8 floors, and each additional module can add 8 floors (customized)
- · DC 12V input, 24V or other power supply is not allowed

43

Elevator controlle	Standard mode	Floor control mode	
Model	SKZ65001	SKZ65002	
Configuration	Reading head + control panel	(Reading head + control panel) + 1 separate floor control module	
Function	Use within the valid time. You can choose any floor after scan the card	Use it within the valid time. After scan the card, manually or automatically go to the floor where the door card customer is located	
Control floor	Unlimited	8th separate floor For each additional layered control module, 8 floors will be added, with a maximum of 32 floors	
Installation position	Reading head: installed on the outside of the elevator to facilitate card scan; Control panel: installed inside the elevator and connected with the elevator line; Floor control module: installed inside the elevator and connected with the elevator line:		
Business card printing mode	In the door lock system, one-time business card printing, first floor room setting card and time setting card. When in use, share the door opening card to the hotel door lock is valid within the specified time.		

Hotel accessories series



SFK65003 Card sender

- · Suitable for reading and writing of high frequency card(Mifare-1).
- · Must be used with "hotel door lock management system" software.
- · Read and write smart cards through radio frequency non-contact mode.
- \cdot $\,$ Connect to computer via USB serial port and operate via computer.
- · Used for card authorization and card cancellation.
- · Distinguish the use of models.



SCJ65002 Data collecting card

- · Suitable for M1 system
- · Suitable for collecting the latest 380 door opening records of hotel locks.
- · Connect to computer through card sender: Applicable to the following door locks::

SGY12400、SGY12500 SGY12600、SGY12700



Party of the second of the sec

SGK65003 Sensor card

- $^{\cdot}$ It is suitable for opening the hotel lock of M1 card, and has M1 function . Readable, writable, and encryptable.
- · Non-contact proximity card.
- · Anti-collision mechanism, standard encryption "1" sector .
- · Customizable engineering debugging card, can open the factory state of the hotel lock .
- Door lock type use:
 Be suitable for: SGY124000、SGY12500、SGY12600
 SGY12700、SGY12800、SGY43000、SGY72000



SKG65001 Power switch (One card)

- $\cdot \;$ Applicable to M1 card hotel lock system to take power.
- · Used for sensor card to get electricity.
- $\cdot\,\,$ After take out the card,the power will be turned off after a delay of 8-15 seconds.
- Power access method :smart detection type (check whether the card is an M1 card).



SKG65002 Power switch (One card)

- · Applicable to M1 card hotel lock system to take power.
- Used for sensor card to get electricity.
 After take out the card the power will.
- $\cdot\,$ After take out the card,the power will be turned off after a delay of 8-15 seconds.
- Power access method :smart detection type (check whether the card is an M1 card).



SKG65003 Power switch (One card)

- $\cdot \;$ Applicable to M1 card hotel lock system to take power.
- · Used for sensor card to get electricity.
- · After take out the card, the power will be turned off after a delay of 8-15 seconds.
- Power access method :smart detection type (check whether the card is an M1 card).



SKG65004 Power switch (One card)

- · Applicable to M1 card hotel lock system to take power.
- · Used for sensor card to get electricity.

- · After take out the card,the power will be turned off after a delay of 8-15 seconds.
- Power access method :smart detection type (check whether the card is an M1 card).

Entry door lock (integrated) series



Entry door lock series



ST5085Z Lock body

- *Passed national standard GB 21556- 2008
- *Suitable for steel or wooden entrance door
- *Solid anti-saw tongue, the direction of oblique bolt is adjustable.
- *Outside key can open square bolt and oblique bolt when closed .
- *Standard single row pin tumbler mechanism lock cylinder.



SX-002 Lock Cylinder

Complies with QB / T2474-2017 standard requirements

- *Suitable for steel or wooden doors
- * Single row flat slot 7 beads lock cylinder
- * Available with double side keysr and one side key one side knob

*With 5 keys

Zinc alloy conjoined cover plate



Nickel hairline +Bright nickel NC Bright green bronze AB (customized colo



Nickel hairline +Bright nickel N

Nickel hairline +Bright nickel NC
Bright green bronze AB (customized color

Stainless steel conjoined cover plate









Indoor door lock series



Indoor door lock series

Indoor door lock series



ST6072 Lock body

Passed national standard GB 21556- 2008 Suitable for steel or wooden entrance doors or indoor doors, etc

Solid anti-saw bolt, the direction of oblique bolt is adjustable

Outside key can open square bolt and oblique bolt when closed Standard single row $\,$ pin tumbler mechanism lock $\,$

cylinder. Fixing panel for sash can be round or square, and

the width can be 20/22 / 24mm



SX-003 Lock Cylinder

Complies with QB / T2474-2017 standard requirements

Suitable for steel or wooden doors Single row flat slot 6 beads lock cylinder Available with double side keys and one side key one side knob With 3 keys

Zinc alloy split cover ring door lock series





SSN27470 Interior door lock

Gun grev hairline Q7 Matte black BN K gold drawing SG (customized color)





Interior door lock Gun grev hairline Q7 Matte black BN





Matte black BN





Matte black BN Nickel hairline SN

Stainless steel split cover ring door lock series





SSN15815F Interior door lock

Stainless steel hairline SS Matte bronze AK (customized color) PVD Brushed gold P7(customized color) Matte black BN





Interior door lock Stainless steel hairline SS Matte bronze AK (customized color)

PVD Brushed gold P7(customized color)





SSN336F

Matte bronze AK (customized color)

PVD Brushed gold P7(customized color)





SSN15810 Interior door lock Interior door lock Stainless steel hairline SS

Stainless steel hairline+Mirror SC Matte bronze AK (customized color) PVD Brushed gold P7(customized color)

Indoor door lock (split) series

ST5572J Mute lock body

.Passed national standard GB 21556-2008 .Suitable for steel or wooden entrance doors or indoor doors, etc. .Solid anti-saw bolt, the direction of oblique bolt is adjustable. .Outside key can open square bolt and oblique bolt when closed. .Trident bolt, mute structure. .Available with double side keys and one side



SX-002 Lock Cylinder

Complies with QB / T2474-2017 "Ferrule Door Lock" standard requirements Suitable for steel or wooden doors Single row flat slot 7 beads lock cylinder Available with double side keys and one side key one side knob With 3 keys(or 5 keys) Some styles are equipped with S slot SX-003 lock cylinder

ST5572JJ Ferrule lock body



Passed national standard GB 21556- 2008. Suitable for steel or wooden entrance doors or indoor doors, etc .

Solid anti-saw bolt, the direction of oblique bolt is adjustable.

Outside key can open square bolt and oblique bolt when closed.

Available with double side keys and one side key one side knob.

Zinc alloy false core split cover ring door lock series



SX-007 Lock Cylinder

Complies with QB / T2474-2017 standard requirements

Suitable for steel or wooden doors Single row flat slot 6 beads lock cylinder With drive bar

Cut off drive bar according to door thickness, applicable door thickness 38-52mm With 3 keys

Zinc alloy split cover ring door lock series

key one side knob.





Matte black BN

Nickel wire drawing SN

Bright green bronze AB



SSN27485 Indoor door lock Gun grev hairline Q7 Matte black BN Nickel wire drawing SN

Bright green bronze AB



SSN27483 Indoor door lock Gun grev hairline Q7 Matte black BN Nickel wire drawing SN





SSN27274 Indoor door lock Gun grev hairline Q7 Matte black BN Nickel wire drawing SN (customized color)

Matte black BN

Nickel wire drawing SN









SSN27570J Indoor door lock Gun grev hairline O7 Matte black BN









SSN27585J Indoor door lock Gun grev hairline Q7 Matte black BN





Gun grev hairline Q7 Matte black BN K gold drawing SG(customized color)





Gun grev hairline O7 Matte black BN





SSN27471 Indoor door lock

Gun grev hairline Q7 Matte black BN





SSN27266 Indoor door lock Gun grev hairline 07 Matte black BN

Stainless steel split cover ring door lock series





Stainless steel hairline SS Gun grev hairline Q7 Matte black BN PVD Brushed gold P7(customized color)





Stainless steel hairline SS Gun grev hairline Q7 PVD Brushed gold P7(customized color

49







Indoor door lock Stainless steel hairline SS Gun grev hairline Q7 Matte black BN PVD Brushed gold P7

(customized color)

SSN18128

Indoor door lock (integrated) series

9

Option 1: ST5050JY Lock body



Passed national standard GB 21556- 2008 Suitable for steel or wooden interior door such as residences, offices, hotels, etc Handle with quick lock function (optional function)

It's a mute trident oblique bolt,and the lock body is designed for silent.

Oblique bolt is adjustable



SX-007 Lock cylinder

Suitable for steel or wooden doors
Single row flat slot 6 beads lock cylinder
With drive bar
Cut off drive bar according to door thickness,
applicable door thickness 38-52mm
With 3 keys

Option 2: ST0050A Lock body



Passed national standard GB 21556- 2008 Suitable for steel or wooden interior door such as residences, offices, hotels, etc Handle with quick lock function (optional function)

It's a mute trident oblique bolt, and the other structures are designed for silent Standard pin tumbler mechanism lock cylinder

Interior door lock - stainless steel covered plate (ST5050JY, ST0050A)



Stainless steel hairline SS
Matte black BN(customized color)
Matte bronze AK(customized color)
PVD gold (brushed+mirror) P8(customized color)



Stainless steel hairline SS
Matte bronze AK(customized color)
PVD gold (brushed+mirror) P8(customized color)



Stainless steel hairline SS
Matte bronze AK(customized color)
PVD gold (brushed+mirror) P8(customized color)

Passed national standard GB 21556-2008



SSN24750
Indoor door lock
Nickel hairline+Bright nickel NC
Matte bronze AK

Matte black BN



Matte black BN

Indoor door lock-Zinc alloy covered plate (ST5050JY, ST0050A)



Indoor door lock (integrated) series



















Bathroom door lock series



Bathroom door lock series



STW-ST0060B Bathroom lock body

Pass the national standard GB 21556- 2008(QB/T2476) test Applicable to bathroom doors, etc Anti-false lock function Left and right

Aluminum alloy handle cover ring bathroom door lock series



SWY48215 Bathroom door lock

Sand silver YY
Gun grey YQ
Matte black BN



SWY48225 Bathroom door lock

Sand silver YY
Gun grey YQ
Matte black BN



SWY48276 Bathroom door lock

Sand silver YY
Gun grey YQ
Matte black BN



SWY48278 Bathroom door lock

Sand silver YY
Gun grey YQ
Matte black BN

Stainless steel handle cover ring bathroom door lock series



SWY15815 Bathroom door lock

Stainless steel hairline+Mirror SC Matte black BN (customized color)

PVD gold (brushed+mirror) P8(customized color)



SWY15811

Bathroom door lock

Stainless steel hairline+Mirror SC
Matte black BN (customized color)
Matte bronze AK (customized color)
PVD gold (brushed+mirror) P8(customized color)



SWY15814

Bathroom door lock
Stainless steel hairline+Mirror SC


Matte black BN (customized color)
Matte bronze AK (customized color)
PVD gold (brushed+mirror) P8(customized color)

Escape push bar lock series



Escape push bar lock series

Escape push bar lock series

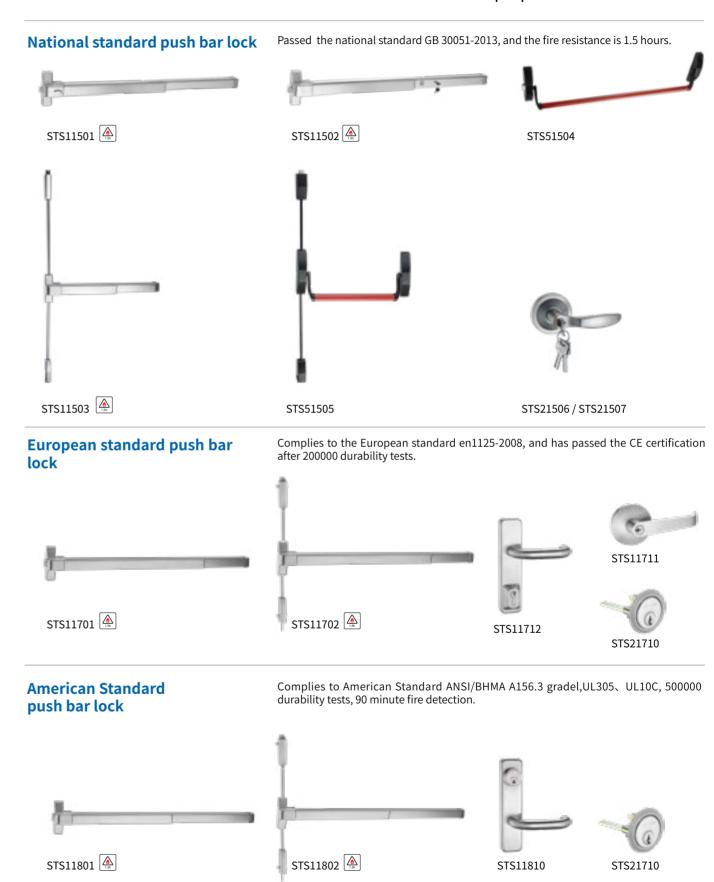



Fire lock series

Passed GB12955 standard 1.5 hours fire test, and obtained fire certification









ST5085Z Lock body

Passed national standard GB 21556-2008 Suitable for steel or wooden entrance door Solid anti-saw bolt, the direction of oblique bolt is adjustable

Outside key can open square bolt and oblique bolt when closed

Standard single row pin tumbler mechanism lock cylinder



SX-002 Lock cylinder

* Complies with QB / T2474-2017 standard requirements

Suitable for steel or wooden doors

- * Single row flat slot 7 beads lock cylinder
- * Available with double side keysr and one side key one side knob With 5 keys











SSN12730F door lock (fire lock)



SSN15811F door lock (fire lock)



SSN15814F door lock (fire lock)



SSN482F door lock (fire lock)



ST6072 Lock body

Passed national standard GB 21556- 2008 Suitable for steel or wooden entrance doors or indoor doors, etc

Solid anti-saw bolt, the direction of oblique bolt is adjustable

Outside key can open square bolt and oblique bolt when closed

Standard single row pin tumbler mechanism lock cylinder Fixing panel for sash can be round or square, and the width can be 20/22 / 24mm



SX-003 Lock cylinder

Complies with QB / T2474-2017 standard requirements

Suitable for steel or wooden doors
Single row flat slot 6 beads lock cylinder
Available with double side keys and one side
key one side knob

With 3 keys

















Pipe well lock series



Pipe well lock series

Pipe well lock series









SSN12700(With 55D lock body)





55Z (Single oblique bolt lock body)



SGSS003 (With 55D lock body)





Option 1:



(A)



SFZ11207(With 55Z lock body)



SX-003T (S-groove single row bead lock cylinder)



SX-001T (Half section lock cylinder)

Hardware accessories

Hardware accessories



Hardware accessories



SHY12103 Fireproof hinge



SHY12104 (s) Fireproof hinge



SHY12105 Fireproof hinge



SHY12106 Hinge



SHY12124 Concealed hinge



SHY12107 Hinge



SHY404030-2BB Luropean standard hinge



SHY454046-4BB American standard first class hinge



SHY12126 PIP hinge



SHY12113 Flag hinge



SHY22146 Three dimensional concealed hinge



SHY42135 Multifunctional hinge

Hardware accessories

Hardware accessories



Peephole



Peephole



Peephole



STB12901 Sliding plate



SSW12602 Sequencer



SSW12603 Concealed sequencer



SSW12604 Overloaded sequencer



SCX12705 Concealed bolt



SMX12203 Door stopper



SMX12223 Door stopper



SMX12215 Door stopper



SHY22147 Three dimensional concealed hinge



SCX12701 Steel concealed door blind latch



SFL22506 Anti-theft chain



SFL12501 Anti-theft buckle



SFL12507 Anti-theft chain



SMX22220 Door stopper



SMX12211 Door stopper



SMX12213 Door stopper



SMX22219 Door stopper



SDS43001 Automatic door bottom dust guard strip



Automatic concealed bolt



SMF11012 Wooden door sealing strip



Dustproof cylinder

Sliding door hardware series





Door control hardware sliding door product catalog

Door control hardware series

KYN8210A Wooden sliding door accessories

Wooden sliding door accessories





Wooden and metal frame sliding door accessories







Buffer sliding door accessories







Sliding door hardware series

Sliding door hardware series

Aluminum narrow frame buffer sliding door accessories







Aluminum narrow frame buffer sliding door accessories








Aluminum narrow frame linkage sliding door accessories







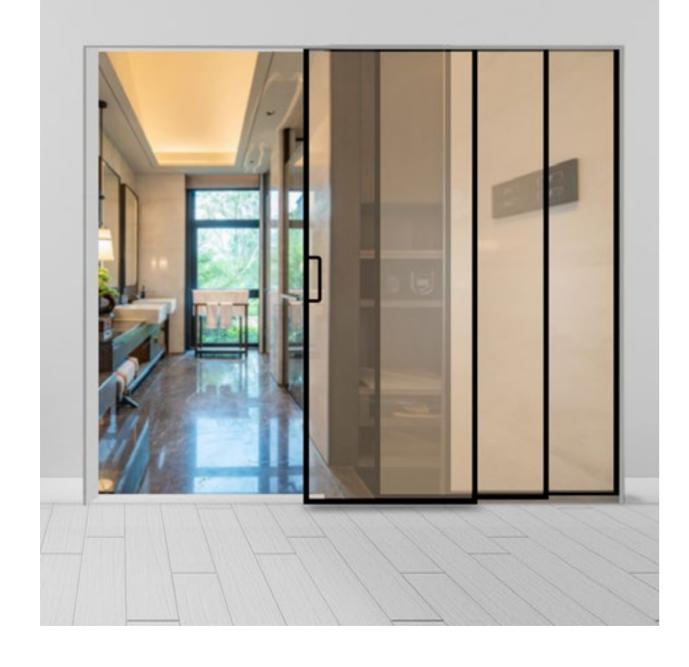


Handle hardware series

Handle hardware series







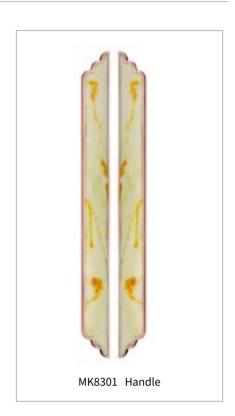









Electric floor hinge series

Electric floor hinge series



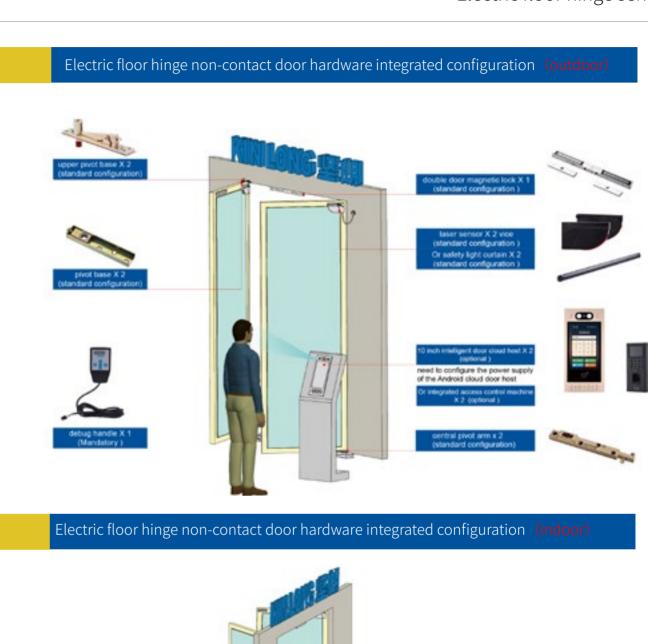

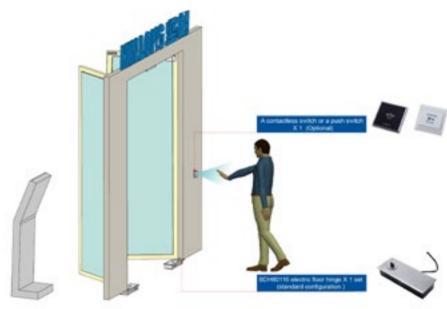

Floor hinge series




Floor spring and supporting hardware







Electric door closer series Electric door closer series

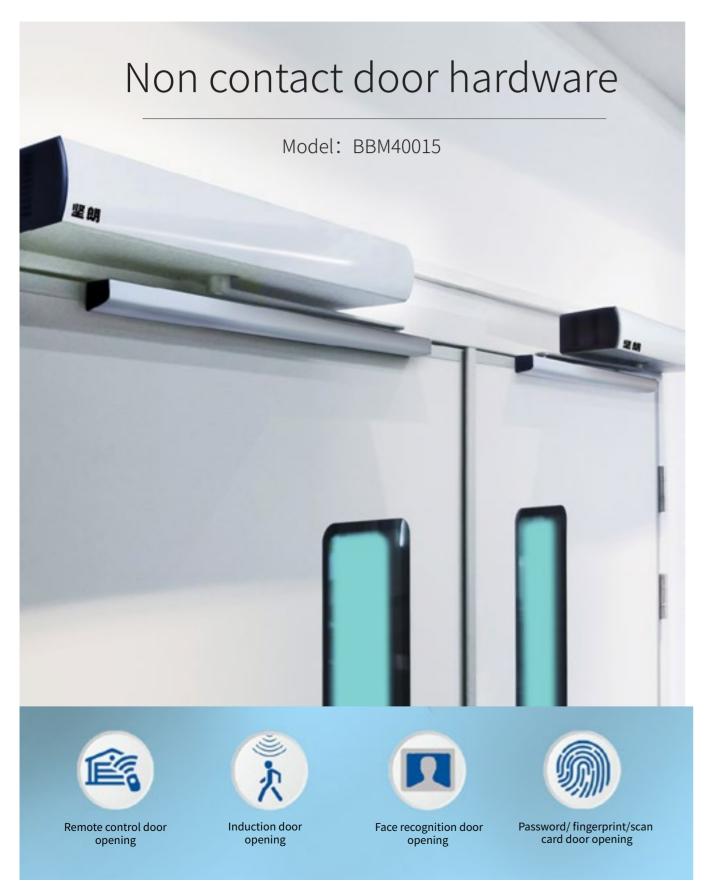


Electric door closer sliding rail non - contact door hardware integrated configuration scheme (outdoor stoken x 2 (Natural and Goard Stoken x 2 (Natural and

Electric door closer sliding rail non - contact door hardware integrated configuration scheme (indoor)



Door closer series

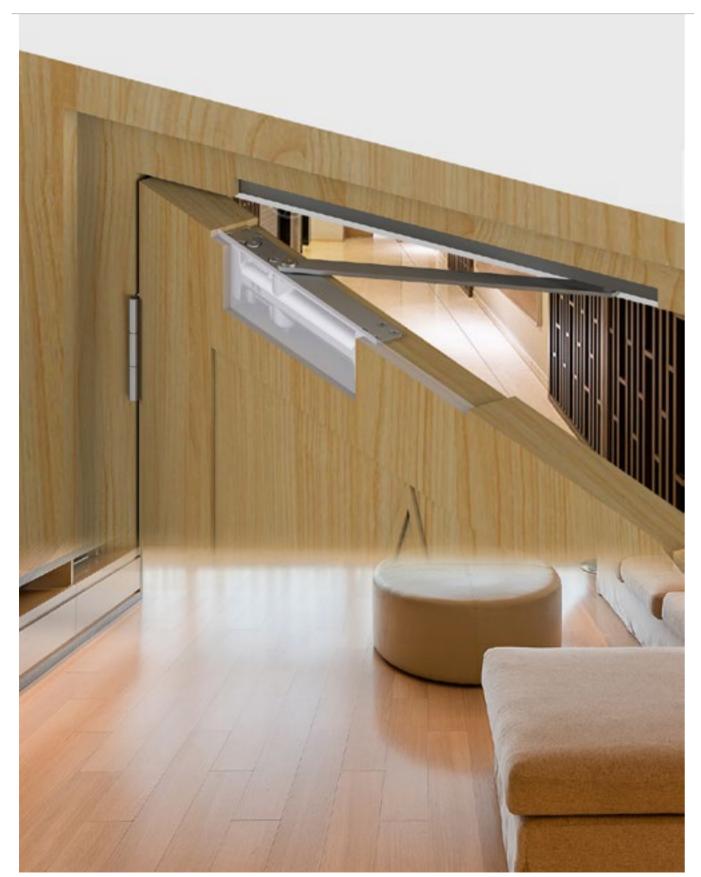


77



Door closer series

BBM90115 Door closer

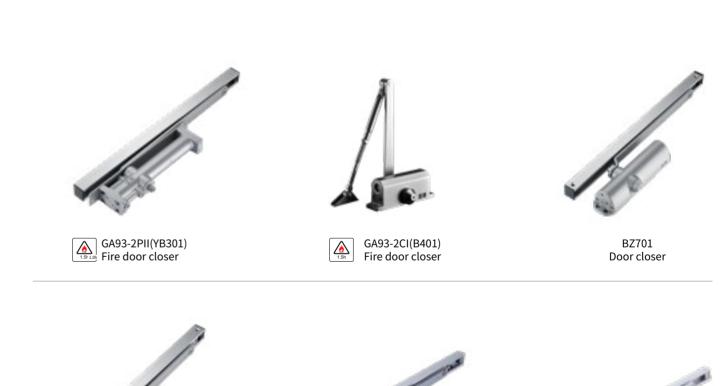


BBM30115 Door closer

BZ802 Door closer

Fire linkage door closer series

Fire door monitoring system topology (five wire system non coding type)

Fire linkage door closer series

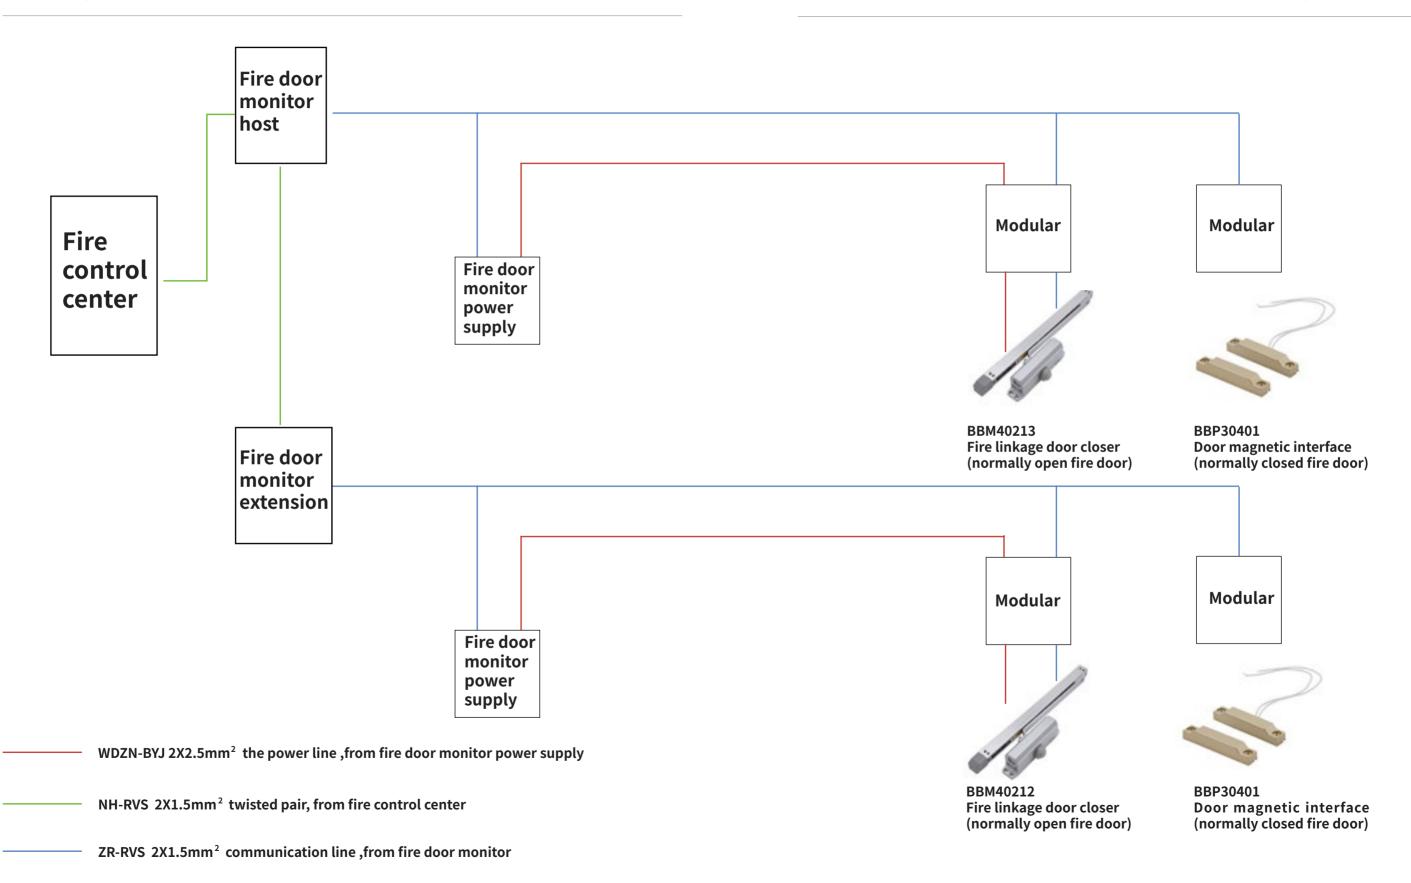



. 82

LHP00131 Shower enclosure

Conventional specification: 900x900x2000mm

Scope of customization: L1:800-1200、L2:800-1200mm、

H:1850-2200mm

Product material: 304 stainless steel Surface treatment: Mirror light/matte black

Glass thickness: 8/10/12mm

Optional stone foundation: 50x60mm

Functional characteristics:

1.Universal Angle joint, Angle is released.

2. hinge: Flexible and light rotation, quiet and low noise,

strong bearing capacity.

3. glass: Automotive grade tempered glass and through the

national 3C safety certification,

The house has passed the national industry standard

QB2584-2007 standard test.

This series can be used for external doors or internal doors











LTS00521 Shower enclosure

Conventional specification: 1400x2000mm

Scope of customization: L:1200-1600、H:1850-2200mm

Product material: Aluminium alloy

Glass thickness: 6/8mm

Optional stone foundation: 50x60mm

Surface treatment: Brilliant silver/ Matte silver/ matte black

Functional characteristics:

1.All 304 stainless steel structure, guide rail height 47MM,


solid, easy to install.

2. Side hanging wheel design, smooth pulley movement, low

3.Can accept the size of non-standard customization, the room body is a font, L shape, fan .

4. glass: Automotive grade tempered glass and through the national 3C safety certification,

The house has passed the national industry standard OB2584-2007 standard test.









LTC00542 Shower enclosure

Conventional specification: 900x900x2000mm

Scope of customization: L1:800-1200, L2:800-1200,

H:1850-2200mm

Product material: Aluminium alloy

Glass thickness: 6/8mm

Optional stone foundation: 50x60mm

Surface treatment: Brilliant silver/ Matte silver/matte black

Functional characteristics:

1.All 304 stainless steel structure, guide rail height 47MM,

solid, easy to install.

2. Side hanging wheel design, smooth pulley movement, low


3.Can accept the size of non-standard customization, the


room body is a font, L shape, fan. 4. glass: Automotive grade tempered glass and through the


national 3C safety certification,

The house has passed the national industry standard

OB2584-2007 standard test.





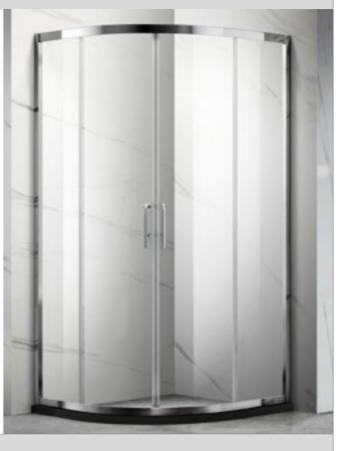

LHP90131 Shower enclosure

Conventional specification: 900x900x2000mm

Scope of customization: L1:800-1200, L2:800-1200mm,

H:1850-2200mm

Product material: 304 stainless steel Surface treatment: Mirror light/matte black

Glass thickness: 8/10/12mm

Optional stone foundation: 50x60mm Functional characteristics:


1. Universal Angle joint, Angle is released. 2. hinge: Flexible and light rotation, quiet and low noise,

strong bearing capacity.

3. glass: Automotive grade tempered glass and through the national 3C safety certification,


The house has passed the national industry standard QB2584-2007 standard test.

This series can be used for external doors or internal doors













GZT00141 Shower enclosure

Conventional specification: 2000x900x2200mm

Scope of customization: L:1800-3000 W:800-1200mm 、H:1850-2400mm Product material: Aluminium alloy Glass thickness: 8/10mm Optional stone foundation: 50x60mm

Functional characteristics: 1.One door for both purposes:

The unique rotating shaft structure easily enables 240° internal

and external doors


2.minimalism: On the track face25mm

3.safety: Glass edge metal wrap, multiple security protection. 4.glass: Automotive grade tempered glass and through the national 3C safety certification,

The house has passed the national industry standard QB2584-2007 standard test.

Surface treatment: Brushed gold/Gun ash/matte black

This series can be used for external doors or internal doors





GHT00152 Shower enclosure

Conventional specification: 2000x900x2200mm

Scope of customization: L:2000-3000 W:800-1200mm 、H:1850-2400mm Product material: Aluminium alloy Glass thickness: 8/10mm Optional stone foundation: 50x60mm

Functional characteristics:

1.Invisible hinge: Hinge hidden not exposed, strong bearing capacity


2.minimalism: On the track face 20mm

3.safety: Glass edge metal wrap, multiple security

4.glass: Automotive grade tempered glass and through the national 3C safety certification,


The house has passed the national industry standard QB2584-2007 standard test.

Surface treatment: Brushed gold/Gun ash/matte black







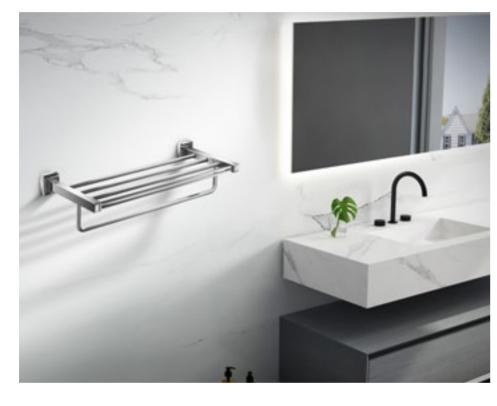



Bathroom hardware typical picture book

Bathroom hardware series























Faucet hardware series

































Faucet hardware series

























Bathroom hangers

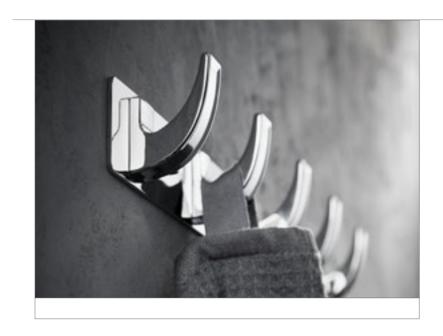
















Floor drain hardware series Electric towel rack































Bathroom accessory















































Furniture hardware series





products atlas

Furniture hardware series

























